

PJM Manual 12:

Balancing Operations

Revision: ~~3940~~

Effective Date: ~~February 21, 2019~~ ~~March 26, 2020~~

Prepared by
Dispatch

PJM © ~~2019~~ ~~2020~~



Table of Contents

Table of Exhibits..... 6

Approval..... 7

Current Revision..... 8

Introduction..... 9

 About PJM Manuals..... 9

 About This Manual..... 9

 Using This Manual..... 10

Section 1: Overview..... 11

 1.1 Scope and Purpose of Dispatching..... 11

 1.2 PJM Responsibilities..... 12

 1.2.1 PJM Communications..... 13

 1.3 PJM Member Responsibilities..... 13

 1.3.1 Market Buyers..... 14

 1.3.2 Market Sellers..... 14

 1.3.3 Load Serving Entities..... 14

Section 2: Dispatching Tools..... 15

 2.1 Control Center Tools..... 15

 2.1.1 EMS Applications..... 15

 2.1.2 PC Applications..... 16

 2.1.3 Ancillary Tools..... 17

Section 3: System Control..... 18

 3.1 Adjusting PJM Balancing Area-Scheduled Resources..... 18

 3.1.1 PJM Area Control Error..... 18

 3.1.2 PJM Control Implementation..... 23

 3.1.3 PJM Member Control Implementation..... 25

 3.2 Time Error..... 27

 3.2.1 Time Error Correction Notification..... 27

~~3.3 External Transactions Scheduling..... 28~~

~~3.3.1 Overview of External Transaction Scheduling..... 28~~

~~3.4 External Transaction Scheduling Business Rules..... 29~~

~~3.4.1 PJM Contact Information..... 29~~

~~3.4.2 External Transaction Timing Requirements..... 29~~

3.4.3 General Information.....	31
3.4.4 Data Requirements.....	31
3.4.5 Ramp Limits.....	31
3.4.6 OASIS Business Rules.....	32
3.4.7 Entering Ramp Reservations.....	35
3.4.8 Entering Schedules.....	36
3.4.9 Entering Real-Time with Price Schedules.....	36
3.4.10 Entering Two-Settlement Schedules.....	37
3.4.11 Transaction Validations, Verification and Checkout.....	37
3.5 Inadvertent Interchange.....	39
3.5.1 Correcting for Accumulation of Inadvertent Interchange.....	39
3.5.2 Measurements and Compliance.....	40
3.6 Primary Frequency Response.....	40
3.6.1 Generator Primary Frequency Response Evaluation.....	40
3.6.2 Event Selection.....	41

Section 4: Providing Ancillary Services..... 42

4.1 Reserves.....	42
4.1.1 Monitoring Reserves.....	42
4.1.2 Loading Reserves.....	43
4.2 Shared Reserves.....	45
4.2.1 Payback.....	46
4.2.2 Restoring Reserves.....	46
4.3 VACAR Reserve Sharing.....	47
4.4 Regulation.....	47
4.4.1 PJM RTO Regulation Market Obligations.....	48
4.4.2 Regulation Signals.....	49
4.4.3 Determining Regulation Assignment.....	50
4.4.4 Dispatching Regulation.....	51
4.5 Qualifying Regulating Resources.....	53
4.5.1 Regulation Qualification Test.....	54
4.5.2 Certifying Regulating Resource.....	55
4.5.3 Certifying Multiple Combustion Turbines or Hydro Units at a Single Site.....	56
4.5.4 Increasing Regulation Capability on a Resource.....	56
4.5.5 Disqualification and Re-Qualification of a Regulation Resource.....	57
4.5.6 Performance Score Calculation.....	58
4.5.7 Use of Performance Groups in the Performance Score.....	59
4.5.8 Performance Scores for Regulation Resources De during a Synchronized Reserve Event.....	60
4.5.9 Performance Scores during During Periods with With Insufficient Data.....	60
4.5.10 Performance Scores for Regulation Assignments with With Limited Notification.....	61
4.6 Black Start Service.....	61
4.6.1 Additional PJM Requirements.....	61
4.6.2 Restoration Assumptions.....	62
4.6.3 Jurisdiction.....	63

4.6.4 Definitions.....	63
4.6.5 Objectives of Determining Black Start Criticality.....	63
4.6.6 Assumptions.....	63
4.6.7 Minimum Critical Unit Requirements.....	63
4.6.8 Product Description.....	64
4.6.9 Generator Owner’s Commitment.....	65
4.6.10 Performance Standards.....	66
4.6.11 PJM Obligations.....	67
4.6.12 Testing.....	67
4.6.13 Testing and Training Standards and Records.....	68
4.6.14 Non-performance.....	69
4.6.15 Termination of Black Start Service.....	70
Section 5: Transmission Facility Control.....	72
5.1 Corrective Control Strategies.....	72
5.2 Reactive Limitation Control.....	75
5.3 Voltage Control.....	76
5.3.1 Action in a Low-Voltage Situation.....	77
5.3.2 500 kV System Voltage Below 500 kV.....	77
5.3.3 Action in a High-Voltage Situation.....	78
5.4 Thermal Overloaded Transmission.....	79
5.4.1 Transaction Curtailment.....	79
5.4.2 Generation Redispatch.....	79
5.4.3 Operating Mode Change Procedure.....	79
5.4.4 Generation Redispatch (Non-Market Facilities).....	80
Attachment A: PJM Instantaneous Reserve Check (IRC).....	81
IRC --- Definitions of Terms / Calculations.....	81
Attachment B: Transmission Constraint Control Guidelines.....	84
B.1 Non-Cost Measures.....	84
B.2 Generation Re-dispatch.....	84
B.3 Analyzing and Controlling nonNon-market Market BES facilitiesFacilities	86
B.3.1 Outage Approval Process for BES facilitiesFacilities	86
B.3.2 Outage Approval Process for nonNon-market Market BES Facilities.....	86
B.3.3 Resolving Modeling Differences.....	87
B.3.4 Real- time Time Controlling Actions.....	87
B.3.5 Maintaining System Reliability.....	88
Attachment C: PJM Black Start Test Report Form.....	90
Attachment D: Disturbance Control Performance/Standard.....	91

Attachment E: PJM REPORTING Reporting OF of NERC BAL Standard.....	93
E.1 Daily Data Support for BAL-005, BAL-006, and BAL-001 Reporting.....	93
E.2 Inadvertent Interchange Calculation.....	93
E.3 PJM Frequency Bias.....	93
Attachment F: Dynamic Transfers.....	96
F.1 Background.....	96
F.2 Dynamic Transfer Request Process Flow.....	97
Purpose.....	97
Submitting Requests.....	97
Administrative Fee.....	97
Pseudo-Tie Approval Process.....	97
Planning Eligibility Criteria.....	97
Modeling Eligibility Criteria.....	99
Electrical Distance Test.....	99
Seams Coordination Model Consistency.....	99
Markets Eligibility Criteria.....	100
Market-to-Market Flowgate Test.....	100
Transfer of Firm Allocation Eligibility.....	100
Estimate & and Deposit.....	100
Documentation.....	100
Withdrawals.....	101
F.3 PJM EMS Modeling Requirements for Implementing Pseudo-Ties.....	101
F.4 Generation Dynamic Transfer Business Rules.....	102
F.5 Dynamic Transfer Requirements Summary.....	109
F.6 References.....	113
Revision History.....	115

Table of Exhibits

Exhibit 1: Dispatching Timeline.....	12
Exhibit 2: Calculation of PJM ACE.....	20
Exhibit 3: PJM Regulation Signals.....	23
Exhibit 4: Calculation of Dispatch Price and Megawatt W Signals.....	24
Exhibit 5: Resource Dispatching.....	25
Exhibit 6: PJM Member Interface.....	26
Exhibit 7: Example Ramp Calculation	32
Exhibit 8: On-Peak Transmission Service Over 16- Hour Period Example	33
Exhibit 9: On-Peak Transmission Service Over 18- Hour Period Example	33
Exhibit 10: Off-Peak Monday—Friday Transmission Service Example	34
Exhibit 11: Off-Peak Saturday—Sunday Transmission Service Example	35
Exhibit 12: Assigned Regulation and Regulation Range requirements.....	48
Exhibit 13: Limit Relationship for Regulation.....	49
Exhibit 14: Area Regulation Assignment.....	52
Exhibit 15: Corrective Control Strategies.....	72
Exhibit 16: Power System Limits.....	75
Exhibit 17: PJM Instantaneous Reserve Check Terms & <u>and</u> Relationships.....	81
Exhibit 18: Definitions of PJM Instantaneous Reserve Check Terms.....	82
Exhibit 19: Sample Completed Instantaneous Reserve Check Company Unit Data.....	83
Exhibit 20: Partial unit <u>Unit</u> Dynamic Transfer methods <u>Methods</u>	103
Exhibit 21: Dynamic Transfer Requirements Summary.....	110

Approval

Approval Date: ~~02/21/2019~~05/01/2019

Effective Date: ~~02/21/2019~~03/26/2020

~~Chris Pilong~~Rebecca Carroll, ~~Manager~~Director Dispatch

Current Revision**Revision 40 (03/26/2020)**

- Periodic Review updated to address in all sections:
 - o Standard grammar
 - o Standard punctuation
 - o Capitalization – all capitalized defined terms checked in OA, Tariff and RAA as well as within Manual 12 and the NERC glossary of terms
 - o Check links
 - o Check names of PJM departments/divisions
 - o Remove extra words/add missing words – queried when not obvious
 - o Fix spelling errors
 - o Fix spacing errors
 - o Put times, numbers, phone numbers and units of measure into consistent format
- Updated manual ownership from Chris Pilog to Rebecca Carroll
- About this Manual – updated Bulk Power Electric Supply system facilities to Bulk Power System
- Section 3.3 – deleted entire section. Section 2.1 of the Regional Transmission and Energy Scheduling Practices document is the official source of this information
- Section 3.4 – deleted entire section. Section 2.2 of the Regional Transmission and Energy Scheduling Practices document is the official source of this information
- Section 4.1.2 and Attachment D – updated language to be consistent with the NERC definition of a Disturbance Control Standard (DCS) event
- Attachment B Section 3.4 – changed cost-capped to offer-capped
- Attachment D – added the NERC definition for a Reportable Disturbance
- Attachment F Section F3 – updated references to PJM Manual 03A which were recently changed

Revision 39 (02/21/2019)

- Section 3 and Attachment D – removed version numbers from BAL-001 and BAL-002 references
- Added sub-section 3.6 for Primary Frequency Response Performance
- Cover to cover periodic review

Introduction

Welcome to the **PJM Manual 12, PJM Manual for Balancing Operations**. In this Introduction, you will find information about PJM manuals in general, an overview of this PJM manual in particular and information on how to use this manual.

About PJM Manuals

The PJM manuals are the instructions, rules, procedures, and guidelines established by PJM for the operation, planning, and accounting requirements of the PJM RTO and the PJM Energy Market. The manuals are grouped under the following categories:

- Transmission
- PJM Energy Market
- Generation and transmission interconnection
- Reserve
- Accounting and billing
- PJM administrative services

For a complete list of all PJM manuals, go to the Library section on PJM.com.

About This Manual

PJM Manual 12, The PJM Manual for Balancing Operations, is one of a series of manuals within the PJM Energy Market manuals. This manual focuses on the activities that occur in the real-time operation of the PJM Energy Market. The manual describes how PJM dispatches and controls Capacity Resources, and how PJM monitors transmission facilities. It also describes how PJM provides Ancillary Services.

The **PJM Manual for Manual 12 Balancing Operations** consists of five sections and six attachments. Both the sections and the attachments are listed in the table of contents beginning on page 2.

Intended Audiences

The intended audiences for **the PJM Manual for Balancing Operations Manual 12** are:

- PJM Members – Any participant requesting to purchase or sell energy to or from **the PJM Energy Market**, and any participant that schedules bilateral sales or purchases.
- PJM operations staff – PJM operations staff monitors the performance of the Capacity Resource.
- PJM dispatchers – PJM dispatchers are responsible for **the** reliable operation of the PJM RTO and **for** posting information in the OASIS. “PJM dispatchers” refers to PJM dispatchers located in all PJM control centers.
- Transmission Owners/Generation Owners – The Transmission Owners/Generation Owners, system operators, dispatchers direct operation of the local facilities, and

communicate with PJM dispatchers to coordinate the operation of the Bulk Power Electric Supply system System facilities.

References

The references to other documents that provide background or additional details directly related to the PJM Manual for Balancing Operations are: Manual 12 are:

- NERC Operating Manual
- PJM Manual 10, for Pre-Scheduling Operations
- PJM Manual 11, for Energy & Ancillary Services Market Operations
- PJM Manual for 28, Operating Agreement Accounting
- PJM Manual for Emergency Operations (M-13) 13, Emergency Operations

Using This Manual

We believe that explaining concepts is just as important as presenting the procedures. This philosophy is reflected in the way we organize the material in this PJM manual. We start each section with an overview. Then, we present details and procedures, or references to procedures found in other PJM manuals. The following provides an orientation to the manual's structure.

What You Will Find in This Manual

- A Table of contents that lists two levels of subheadings within each of the sections and attachments
- An Approval page that lists the required approvals and a brief outline of the current revision
- Sections containing the specific guidelines, requirements, or procedures including PJM actions and PJM Member actions
- Attachments that include additional supporting documents, forms, or tables
- A Section at the end detailing all previous revisions of this PJM manual.

Section 1: Overview

Welcome to the Overview section of the PJM Manual 12, for Balancing Operations. In this section, you will find the following information:

- A description of the scope and purpose of dispatching (see “Scope and Purpose of Dispatching”);
- A list of PJM dispatching responsibilities (see “PJM Responsibilities”);
- A list of the PJM Member’s dispatching responsibilities (see “PJM Member Responsibilities”).

1.1 Scope and Purpose of Dispatching

Operation of the PJM RTO involves many activities that are performed by different operating and technical personnel. These activities occur in parallel on a continuous basis, 24 hours a day and can be grouped into three overlapping time frames:

- Pre-Scheduling Operations
- Scheduling Operations
- Dispatching Operations

In the PJM Manual 12, for Balancing Operations, we focus mainly on the activities that take place in the current hour of the Operating Day. The following exhibit presents the dispatching activities in the form of a timeline. The reference point for the timeline is the “Operating Day,” the daily 24-hour period beginning at midnight for which transactions on the PJM Interchange Energy Market are scheduled, recognizing that every new day becomes an Operating Day. This timeline-type of description is used throughout this PJM Manual manual.

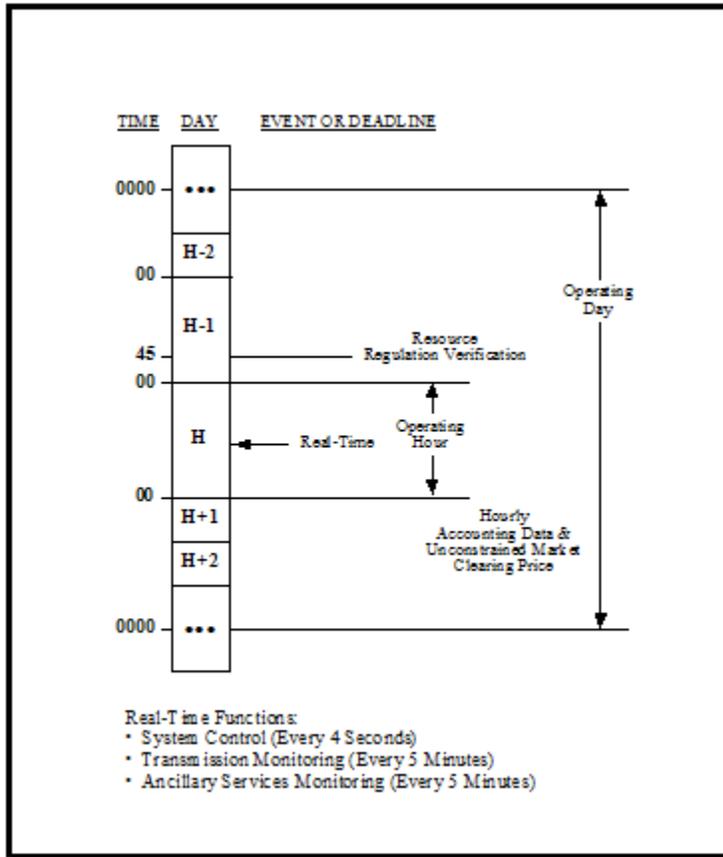


Exhibit 1: Dispatching Timeline

Dispatching includes system control, Ancillary Service monitoring, and transmission system monitoring and control. During the dispatching process, PJM implements and adjusts the **Current Operating Plan**, which is developed during the scheduling process, to maintain reliability and minimize the cost of supplying the energy, reserves, and other services that are required by the PJM Members and the operation of the PJM RTO. The **Current Operating Plan** is developed within the guidelines and rules of the Two Pass System.

In this manual we make no special distinction between the terms “price” and “cost”; PJM Members submit their bids accordingly to either actual cost or offer price, as designated by PJM for each generation resource. For specific information as to the use of price and cost, refer to the Markets Database section in of PJM the PJM Manual 10, for Pre-Scheduling Operations.

1.2 PJM Responsibilities

PJM monitors and controls the PJM RTO such that the least-cost means of satisfying the projected hourly energy, Operating Reserves (the amount of generating capacity scheduled to be available for a specified period of an Operating Day), and other Ancillary Services requirements of the Market Buyers (Members that have met reasonable creditworthiness standards established by the Office of the Interconnection and that are otherwise able to make

purchases in the PJM Interchange Energy Market), including the reliability requirements of the PJM Balancing Authority Area, are met. Specifically, PJM's responsibilities to support dispatching activities include:

- Directing PJM Members to adjust the output of any PJM RTO-~~Scheduled Resources~~scheduled resource; commit unscheduled PJM RTO resources; cancel selection of PJM Balancing Authority Area-~~Scheduled Resources~~scheduled resources
- Operating the PJM RTO transmission system in accordance with NERC and regional reliability council standards and procedures.
- Committing the most cost efficient Regulation and Synchronized Reserve resources available
- Implementing the PJM/MISO ~~Congestion Management~~congestion management procedure for congested transmission facilities external to PJM RTO.
- Implementing the NERC Transmission Loading Relief (TLR) procedure as necessary to provide relief to external or internal transmission facilities.
- Verifying the accuracy of Locational Marginal Pricing (LMP) data during constrained/unconstrained operations.
- Implementation of Emergency Procedures in accordance with PJM Manual M-13, Emergency Operations.

Note:

Synchronized Reserve: Section 1.3.33B.01 of the PJM Operating Agreement (OA) defines Synchronized Reserves as the reserve capability of generation resources that can be converted fully into energy or Demand Resources whose demand can be reduced within ~~ten~~10 minutes from the request of the Office of the Interconnection dispatcher, and is provided by equipment that is electrically synchronized to the Transmission System. Synchronized Reserves are supplied from ~~10-~~minute synchronized generating resources (i.e., Synchronous Reserves) and 10-minute ~~demand~~demand-side response resources.

1.2.1 PJM Communications

PJM dispatching operations are conducted from two control centers. The dispatchers in both control centers work together as a single team. The ~~Shift Supervisor~~shift supervisor provides ~~real~~real-time leadership over dispatchers in both control centers. Communications between the control centers is facilitated through the use of ~~closed~~closed-circuit TV through which dispatchers can communicate visually and orally in real time with their counterparts ~~and supervision~~. System monitoring and control responsibilities are shared between the control centers.

1.3 PJM Member Responsibilities

Only Market Buyers and Market Sellers are eligible to submit offers and purchase energy or related services in the PJM Energy Market. The PJM Members include the Market Buyers and the Market Sellers.

1.3.1 Market Buyers

There are two general types of Market Buyers:

1. Internal Market Buyer: An Internal Market Buyer is a Market Buyer that is purchasing energy from the PJM Energy Market for consumption by end-users that are located inside the PJM RTO. An Internal Market Buyer may be further classified as a Generating Market Buyer. A Generating Market Buyer is an Internal Market Buyer that owns or has contractual rights to the output of generation resources which that are capable of serving the Market Buyer's load in the PJM RTO or selling energy-related services in the PJM Energy Market or elsewhere.
2. External Market Buyer: An External Market Buyer is a Market Buyer that is making purchases of energy from the PJM Energy Market for consumption by end-users that are located outside the PJM RTO.

The Internal Market Buyer's dispatching responsibilities include:

Satisfying its Regulation obligation from its own resources by one of these methods:

- By contractual Contractual arrangements with another PJM Member, or,
- By purchases from the PJM Energy Market

1.3.2 Market Sellers

A Market Seller is a PJM Member that demonstrates to PJM that it meets the standards for the issuance of an order mandating the provision of transmission service under Section 211 of the Federal Power Act, submits an application to PJM, and is approved. By definition, all Market Buyers become Market Sellers upon approval of their applications.

Market Sellers' dispatching responsibilities include:

- Ensuring each Capacity Resource complies with energy dispatching signals and instructions that are issued by PJM, and,
- Complying with Regulation signals and instructions that are issued by PJM.

1.3.3 Load Serving Entities

A Load Serving Entity (LSE) is any entity that has been granted authority or has an obligation pursuant to state or local law, regulation, or franchise to sell electric energy to end-users that are located within the PJM RTO. An LSE may be a Market Buyer or a Market Seller.

Section 2: Dispatching Tools

Welcome to the Dispatching Tools section of **the PJM Manual for Balancing Operations Manual 12**. In this section you will find the following information:

- A description of PJM Control Center tools used for dispatching and operations (see **“Control Center Tools”**).
- A description of the information that is passed on to **mMarket accounting Settlements** (see **“Accounting Information”**).

2.1 Control Center Tools

The tools that are currently used by PJM **operations Operations** staff are described according to three categories: **PJM Energy Management System (EMS)** computer applications, PC applications, and ancillary tools. EMS is further described in PJM Manual **01, Control Center and Data Exchange Requirements, Section section 1, “PJM Systems.”**

2.1.1 EMS Applications

- Automatic Generation Control (AGC) — This program runs every two seconds, calculating Area Control Error (ACE), Area Regulation (AR), and economic dispatch.
- Security Analysis (SA) – This program runs approximately every 1 to 2 minutes and calculates the simulated post-contingency flows on a large number of monitored facilities on the PJM system for the loss of selected contingencies. An EMS **Alarms alarm** is generated for any SA post-contingency value that goes beyond, or falls back under, 100% percent of the monitored facility’s Normal Limit (NL) of 80% percent of the monitored facility’s **Long Long-Term Limit (LT)**. Any facility with an SA value that is greater than 100% percent of the NL, or 80% percent of the monitored facility’s LT, will be monitored in the SA **Thermals thermals** display of PJM’s RTNA package.
- State Estimator (SE) – This program runs approximately every minute and provides simulated flows for the PJM system based on current topology and the availability of telemetered data. SE is used to provide the input to the market systems. An EMS **Alarm alarm** is generated for any SE value that goes beyond, or falls back under 92% percent of the monitored facility’s NL. Any facility with an SE value that is greater than 92% percent of the NL will be monitored in the Actual Thermal Overload display, as well as the SA **Thermals thermals** display, of PJM’s RTNA Package.
- Transfer Limit Calculator (TLC) – This program runs approximately every 4 to 5 minutes and establishes transfer limits for selected interfaces on the PJM system. The process that the application uses is to establish the voltage collapse point for these interfaces and applying a suitable margin from the collapse point as the safe operating limit. TLC facilities are monitored continuously on PJM’s RTO **Critical critical Information information** display. In addition, an EMS **Alarm alarm** is generated whenever the SE **MW megawatt** flow for a transfer interface exceeds the **Recommended recommended Limit limit** as calculated by TLC.

2.1.2 PC Applications

- Markets Database (MDB) — This database is used by the Two-Settlement and Market-Based Regulation Systems. Market Participants update the MDB continuously via XML and Web-based interfaces.
- Dispatch Management Tool (DMT) — The DMT enables PJM Dispatchers dispatchers to manage resource information, transmission constraint information and administer the Regulation Market. The DMT automatically logs resource status changes and provides an electronic source of logging information for Market Settlements.
- Real-Time Security Constrained Economic Dispatch (RT-SCED) — This application calculates Security security Constrained constrained Economic economic Dispatch dispatch solutions for presentation to the dispatchers. The dispatchers then select the best solution that utilizes least-cost dispatch while simultaneously controlling active transmission constraints.
- Intermediate-Time Term Security Constrained Economic Dispatch (IT-SCED) — This application utilizes projected system conditions to calculate commit/decommit resources on the system and provide a forward-looking dispatch trajectory for presentation to the dispatchers.
- eDART — Dispatcher Applications and Reporting Tool. This Internet-based system that allows communication of system information between PJM and member company dispatchers, i.e. Generation generation and Transmission transmission Outage outage Tickets tickets.
- Resource Scheduling and Commitment (RSC) — This program is used to schedule generation resources for up to a week in advance.
- eDart Generation Checkout – This program compares unit schedule availability/bid data in eMarket, unit outages submitted via Generator Ticket (eDart) and stated capability to ensure accurate market data and capacity/reserve projections.
- Hydro Calculator — This program is used to schedule and optimize hydro generating resources located on the Susquehanna River.
- Scheduling Coordinator's Tool — Updates day-ahead generation forecasts and schedules from market databases with additional data from various input sources. This tool is utilized to project system reserves.
- Interchange Manager (IXM) — This program is used by PJM Dispatchers and Transaction Coordinators to manage transaction information.
- ExSchedule — Internet Internet-based system that allows PSEs to submit, revise, and review energy schedules.
- Interchange Distribution Calculator (IDC) — IDC is a NERC-sponsored program, used in the Eastern Interconnection for the purpose of managing transactions. All interchange transactions are modeled in the IDC and the IDC calculates flow impacts of these transactions on each flowgate. If flow relief on any of these flowgates becomes necessary, the IDC is used to communicate which transactions will be modified or curtailed to provide the relief in accordance with business rules established in the NERC TLR procedure.

- Reliability Coordinator Information System (RCIS) — Internet-based system used to exchange operating information among Reliability Coordinators and Balancing Areas Authorities.
- Smartlog – Database logging tool used by dispatch position to log system events. This tool contains bridges from various systems to partially automate the logging process.
- ALL-CALL — Used by PJM operations staff to simultaneously disseminate information to transmission and generation control centers.
- Data Viewer — Internet-based system that allows the PJM Dispatcher dispatcher and participants to view current and projected system data and emergency procedures information.
- PI Process Book — visualization tool utilized to display telemetered data.
- Performance Score Calculation Engine (PSCE) — is a .NET application that calculates the hourly and historic performance score of a resource's regulation response compared to the regulation signal sent by PJM. PSCE also calculates the mileage of each regulation signal by hour.

2.1.3 Ancillary Tools

- Informational TV — This TV is used to obtain weather and Emergency emergency information from selected local network and cable channels.
- Weather Data — Weather reports are printed from the Internet, as posted by the vendor.
- Direct Phone Lines — Direct telephone line communication is available between PJM, the Local local Control control Centerscenters, Load Serving Entities (LSEs) and between PJM and adjacent Balancing Areas Authorities.
- Dynamic Mapboard — The dynamic mapboard displays selected system data; status of lines, transformers, capacitors; and generators; and the results of security analysis of the bulk power transmission system.
- Racal Recording Device — Used to record all phone conversations from dispatching and scheduling positions for documentation.
- Satellite Communications — Push-to-talk all-call and direct point-to-point satellite communications exists with PJM participants and participating external entities as back-up communications.
- Phones/cell phones — Used for back-up communications.

Section 3: System Control

Welcome to the System Control section of **Manual 12** the **PJM Manual for Balancing Operations**. In this section, you will find the following information:

- How PJM adjusts PJM RTO-Scheduled Resources (see “Adjusting PJM Balancing Area-Scheduled Resources”);
- How PJM corrects for time error (see “Time Error”);
- How PJM corrects for accumulated inadvertent interchange (see “Inadvertent Interchange”).

PJM, as the RTO, operates to maintain interconnection steady-state frequency within defined limits by balancing real power demand and supply in real time (per NERC Standard BAL-001-2, “Real Power Balancing Control Performance”), and ensures, as the Balancing Authority, its ability to utilize reserves to balance resources and demand and return interconnection frequency within defined limits following a reportable disturbance (per NERC Standard BAL-002, “Disturbance Control Performance”). Specifics are discussed as follows.

3.1 Adjusting PJM Balancing Area-Scheduled Resources

The PJM RTO must operate sufficient generating capacity under automatic control to meet its obligation to continuously balance its generation and interchange schedules with its load. It is also required to provide its contribution to frequency Regulation for the Eastern Interconnection.

Frequency deviates from schedule because actual tie line power flow does not continuously match scheduled tie line power flow. This imbalance must be minimized, so as not to impose the PJM RTO’s control requirements on the interconnected system. Area Control Error (ACE) is a value that defines how well the PJM Balancing Area is meeting its obligation.

PJM frequency source under primary control is based on the use of a Global Positioning System (GPS)-based “truetime” device which is linked into the Emergency Management System (EMS) control system providing two-second signal input for continuous frequency monitoring. The dispatcher has the ability to change the frequency source within EMS should the primary source become disabled. Should there be a need to control an ACE in multiple zones due to extreme operations, frequency sources can be selected by generation control zones as set up in EMS.

3.1.1 PJM Area Control Error

Area Control Error is a measure of the imbalance between sources of power and uses of power within the PJM RTO. This imbalance is calculated indirectly as the difference between scheduled and actual net interchange, plus the frequency bias contribution to yield ACE in megawatts. Two additional terms may be included in ACE under certain conditions—the time error bias term and PJM dispatcher adjustment term (manual add). These provide for automatic inadvertent interchange payback and error compensation, respectively.

The sign convention for power flow used at PJM is positive for power flow into PJM, in contrast to the NERC sign convention, in which power flow into a Balancing Area Authority Area is negative. This has been carried over into the PJM ACE calculation, which results in a positive

ACE representing overgeneration and a negative ACE representing undergeneration. Exhibit 2 shows the calculation of PJM ACE in block diagram form.

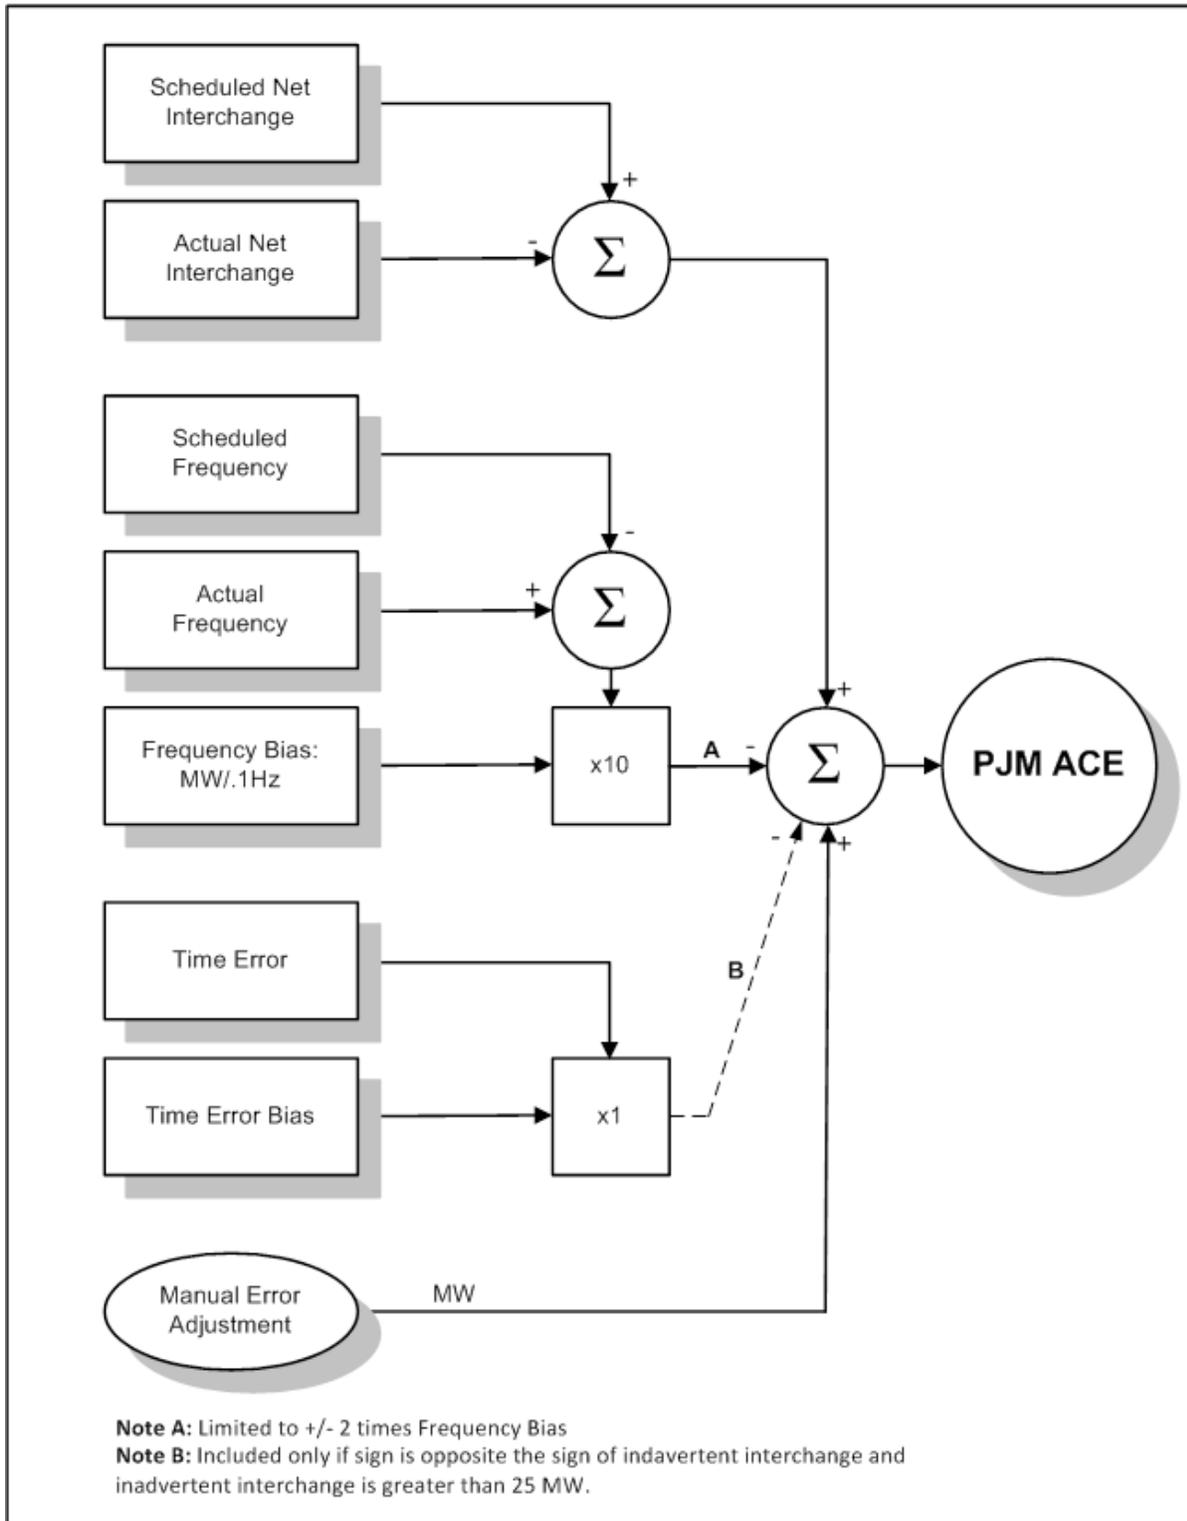


Exhibit 2: Calculation of PJM ACE

Per NERC Standard BAL-001, “Real Power Balancing Control Performance:”

$$Ace = (NI_A - NI_S) - 10B(F_A - F_S) - I_{ME}$$

Where:

- NI_A** is the algebraic sum of actual flows on all tie lines (i.e., Actual Net Interchange)
- NI_S** is the algebraic sum of scheduled flows on all tie line (i.e., Scheduled Net Interchange)
- B** is the Frequency Bias Setting (MW/0.1 Hz) for the Balancing Authority. The constant factor of 10 converts the frequency setting to MW/ Hz
- F_A** is the actual frequency
- F_S** is the scheduled frequency
- I_{ME}** is the meter error correction factor

ACE Control Modes

There are three modes of control available to PJM dispatchers for the operation of the PJM RTO.

- Flat Frequency Control — Flat Frequency Control utilizes only power system frequency as the controlling parameter. This mode of control only responds to frequency deviations and does not adjust operations for any interconnection tie line schedule deviations. This mode is applicable only to those instances when the PJM Balancing Authority Area becomes isolated from the Eastern Interconnection.
- Flat Tie Line Control — Flat Tie Line Control utilizes only interconnection tie line flow as the controlling parameter. This mode of control only responds to net tie flow deviations and does not adjust operation for any frequency deviations. This mode is limited to special circumstances when the PJM Balancing Area Authority desires to maintain a given net interchange flow, and the power system frequency is stable and being controlled by other Balancing Areas.
- Tie Line Bias Control — Tie Line Bias Control is the most widely used mode of control for multi-Balancing Area power systems. This mode of control responds to both frequency and net tie line flow deviations. Exhibit 4 shows all of the calculations for Tie Line Bias Control. The frequency bias factor for the PJM RTO is set by Interconnection Agreement that is at least 1 percent of the yearly peak value and accomplishes the following:
 - o Compensates for automatic governor action so that ACE does not “undo” the changes in generator output due to frequency fluctuations.
 - o Compensates for any lack of PJM governor response by calculating an ACE that produces the PJM RTO’s agreed upon share of frequency support to the Eastern Interconnection.

NERC Control Performance Standard

The PJM RTO operates in accordance with NERC Resource and Demand Balancing (i.e. BAL) standards to ensure its capability to utilize reserves to balance resources and demand in

real-time and to return interconnection frequency within defined limits following a **Reparable Reportable** Disturbance. PJM satisfies the BAL standards by maintaining sufficient generating capacity under automatic control to satisfy its frequency regulation obligation as a member of the Eastern Interconnection. NERC establishes definitive measures of control performance. These control performance standards are documented in the NERC in numerous BAL standards. The NERC Control Performance Standards (CPS) as presented in **NERC Standard BAL-001** – “**Real Power Balancing Control Performance**” define a standard of minimum control performance for each Balancing **Area Authority**. The standards are summarized as follows:

- **Continuous Monitoring** – Each Balancing **Area Authority** monitors its control performance on a continuous basis against two standards:
 - o **Standard One: CPS1** – Over a year, the average of the clock-minute averages of a Balancing Area’s ACE divided by minus 10 B (where B is Balancing Area frequency bias) times the corresponding clock-minute averages of the interconnection’s frequency error must be less than a specific limit. This limit is a constant derived from a targeted frequency bound (limit) that is reviewed and set, as necessary, by NERC.
 - o **Standard Two: BAAL** – The Balancing Authority ACE Limit (BAAL) operations evaluate the clock-minute average of Reporting ACE does not exceed its clock-minute limit for more than 30 consecutive clock minutes.
- **Disturbance Conditions** – In addition to CPS1 and BAAL, the Disturbance Control Standard (DCS) as presented in **NERC Standard BAL-002**, “**Disturbance Control Performance**,” is used by each Balancing **Area Authority** to monitor control performance during recovery from **Disturbance Conditions**. The DCS states that ACE must return either to zero or to its pre-disturbance level within fifteen minutes following the start of the disturbance.

Measurements and Compliance – continuous monitoring is performed by PJM’s **Performance Operations Analysis & Compliance** Department on a daily, monthly, quarterly, and annual basis to ensure compliance with NERC BAL Standards. Performance data measurements are retained in electronic form per NERC BAL requirements.

- **ACE Values** – The ACE used to determine compliance to the CPS must reflect its actual value and exclude short excursions due to transient telemetering problems or other influences such as control algorithm action.
- **System Frequency** used to determine compliance to CPS must reflect the actual value used in dispatch provided at full scan rate (minimum 4 seconds).
- **CPS Compliance** – Each Balancing **Area Authority** must achieve CPS1 compliance of 100 percent and not exceed 30 consecutive BAAL clock minutes. Daily reports are generated with CPS1 & BAAL preliminary information for dispatch.
- **Performance Standard Surveys** – All Balancing **Areas Authorities** must respond to performance standard surveys that are requested by NERC; Survey descriptions are found in Attachment H.
- **Disturbance Control Standard Surveys** – Each Balancing **Area Authority** must submit a quarterly summary report to the regional authority, to NERC, documenting the **Control Area’s** compliance to the DCS during the reporting quarter. Details provided in Attachment H reporting requirements for NERC **Standard BAL-002**.

- DCS Compliance – Each Balancing Area Authority must achieve DCS compliance 100 percent% of the time for reportable disturbances.
- Reporting requirements for NERC BAL standards are found in Attachment H.
- PJM performs an annual review of measurement parameters and requirement thresholds per NERC and Reliability First Standards.

Whenever the magnitude of ACE indicates a severe shortage of generation, a PJM dispatcher notifies PJM Members to immediately supply energy from their Synchronized Reserves. These requests are made via the PJM ALL-CALL communications software and via EMS ICCP data points.

3.1.2 PJM Control Implementation

PJM uses the PJM ACE signal to establish the required control signals that are sent to each PJM Member whose generating resources come under the direction of PJM. PJM develops two types of control signals as follows:

- Regulation
- Dispatch

Regulation Signals

PJM calculates two Regulation signals, as shown by Exhibit 3.

- RegA – lowLow-pass filter of ACE for traditional regulating resources, and,
- RegD – highHigh-pass filter of ACE for dynamic or fast response resources

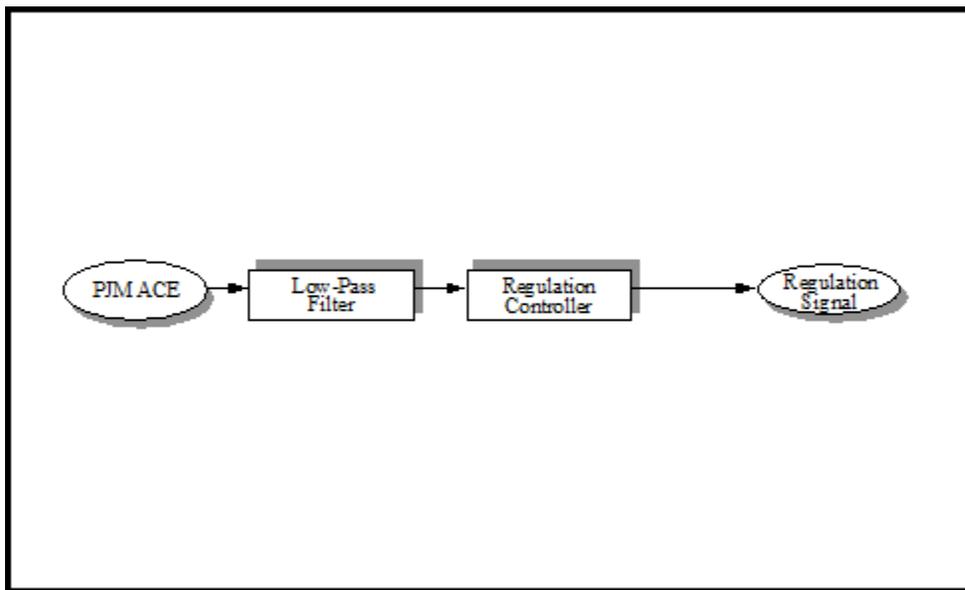


Exhibit 3: PJM Regulation Signals

At present, PJM sends the Regulation signal in the following form to the participating Resource resource owners:

- Digital  The Digital Regulation signal is sent to each Resource resource Owner owner. The Generation Owners receive this signal and then send the appropriate signal to each regulating resource.

Dispatch Signals

The dispatch signals that are calculated by PJM are intended to direct dispatchable generating resources to “follow” the PJM RTO’s requirement. The strategy that is used by PJM is to first develop a PJM price signal from the raw PJM ACE calculation. Exhibit 4 shows how the Dispatch Rate and megawattMW signals are calculated for each participating Generation Owner.

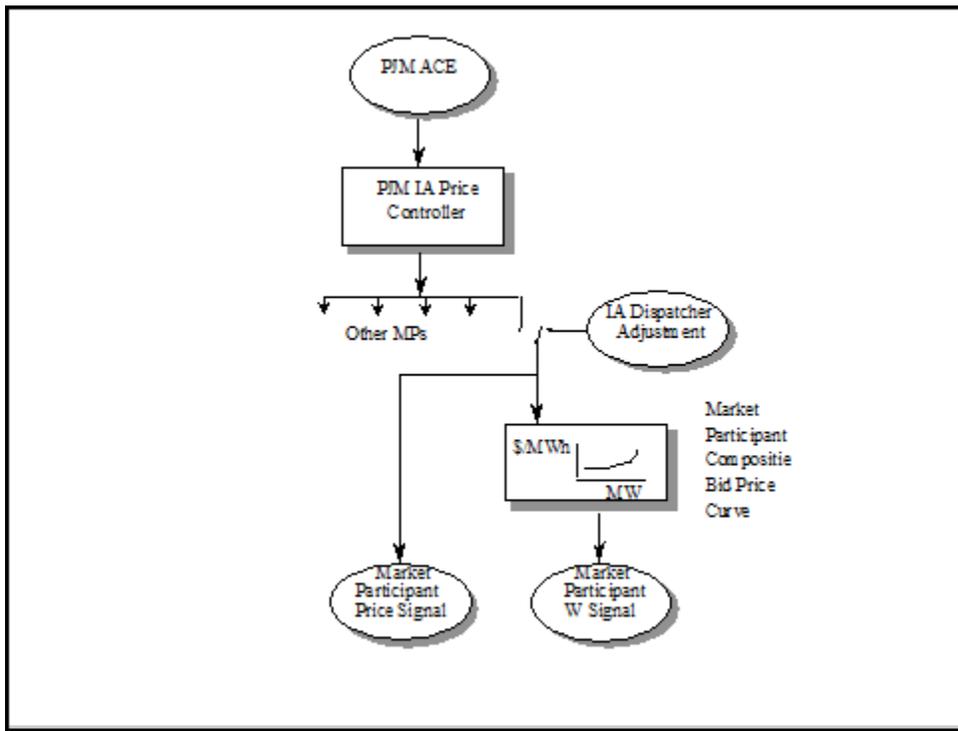


Exhibit 4: Calculation of Dispatch Price and MegawattMW Signals

- Step 1  A common PJM price signal is developed by the RT-SCED tool which acts on load, interchange, transmission constraints and PJM dispatcher input.
- Step 2  In the event of transmission congestion or other security issues, RT-SCED, in conjunction with the PJM dispatcher, may recalculate the dispatch price signals for the effected PJM transmission zones. The price signal for a particular PJM Member is then applied to the generation bid prices for that PJM Member.
- Step 3  The megawattMW versus price relationship is developed by PJM for each participating Generation Owner. The megawattMW versus price relationship is developed by PJM using the scheduled generator offers submitted day-ahead via eMarketMarkets Gateway. Exhibit 7 shows how the various generation resources are correlated with respect to bid prices in order to develop this total megawattMW versus price relationship.

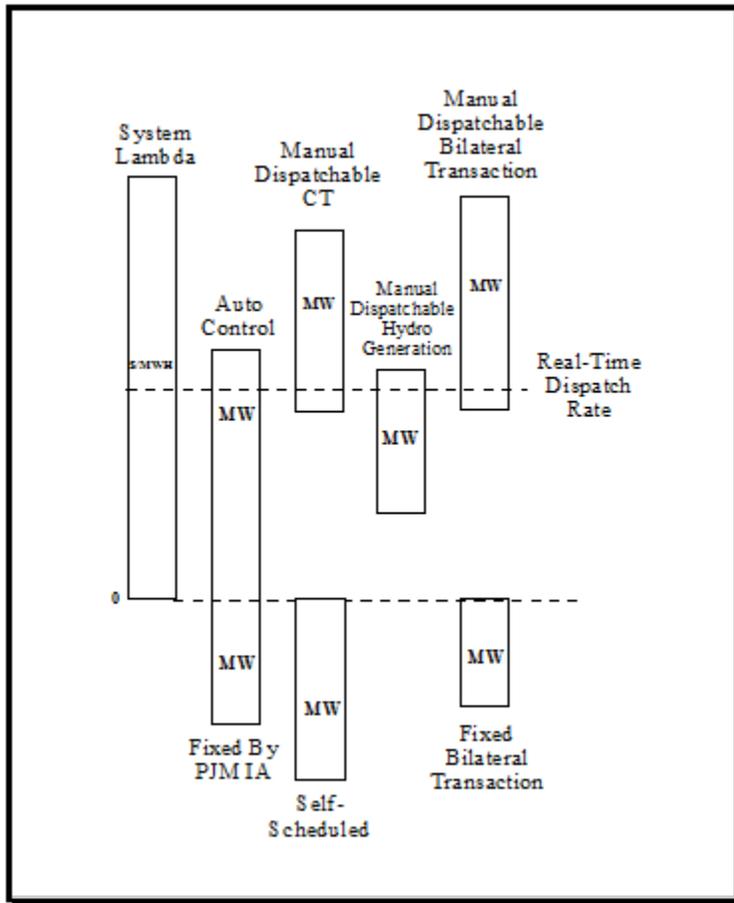


Exhibit 5: Resource Dispatching

It is important to emphasize that the megawatt (MW) versus price relationship applies to manually dispatched, as well as automatically controlled generating units. Since there is a wide mixture of slow- and fast-responding units and manually dispatched units in the PJM Balancing Authority Area, the Dispatch Rate signal is adjusted slowly by PJM dispatchers in order to avoid unnecessary generation adjustments.

3.1.3 PJM Member Control Implementation

PJM assigns desired control actions to the internal PJM Members. PJM Members are responsible for the actual physical control of generating resources. This is generally accomplished through Generation Owners. Exhibit 6 shows the information that is exchanged between PJM and the Generation Owners.

Specific requirements regarding telemetered data and controls as required by NERC Standard BAL-005, "Automatic Generation Control," are described in PJM Manual 01, PJM Manual for Control Center and Data Exchange Requirements (M01), "Control Center Requirements," Section section 4, Billing Metering Standards.

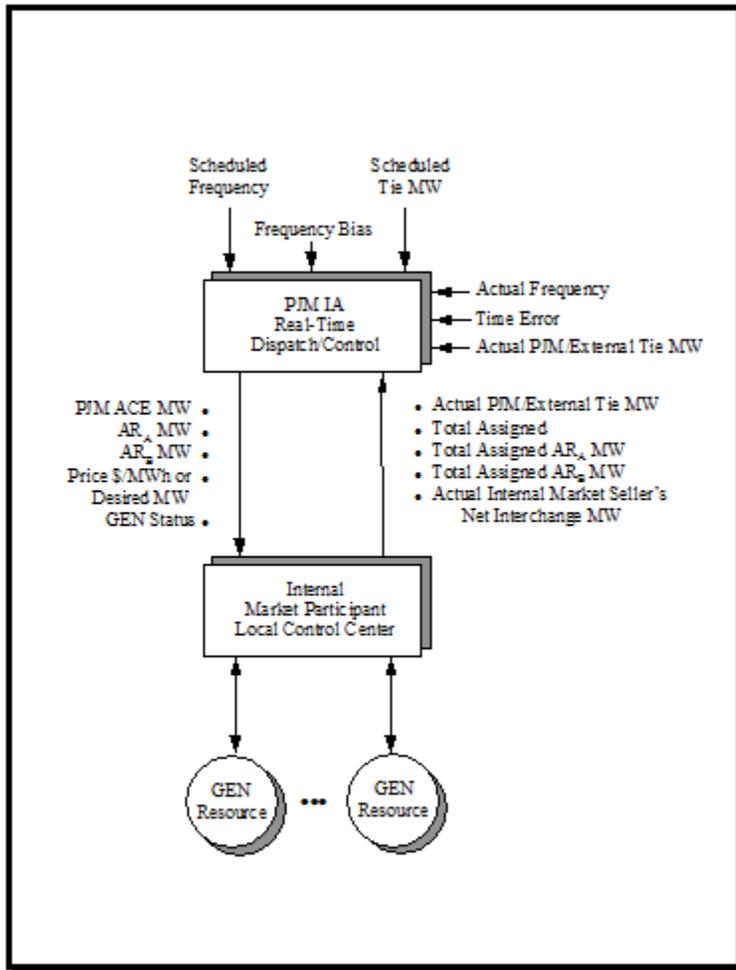


Exhibit 6: PJM Member Interface

The following information is sent by PJM to the Generation Owners:

- PJM ACE **megawattMW**
- Regulation **megawattMW** either RegA or RegD
- Desired **megawattMW**
- Generator status

The following information is sent by the PJM Members to PJM:

- Actual PJM/external tie line **megawattMW**
- Actual total generation **megawattMW**
- Total assigned Regulation **megawattMW** either RegA or RegD
- Actual net interchange **megawattMW**

The PJM Member's Generation Owner converts the total dispatch signal (price or megawatt (MW)) and the regulation/Regulation signal to individual unit control signals. PJM Member resources that are dispatchable by PJM are expected to respond to the dispatch and regulation signals received from PJM. PJM Members are expected to operate their generating resources as close to desired output levels, as practical, consistent with Good Utility Practice.

3.2 Time Error

The system-wide mismatch between load and generation results in frequency deviations from scheduled frequency. The integrated deviation appears as a departure from correct time, i.e., as a time error. Therefore, time error is the accumulation of frequency deviation over a defined period of time.

In accordance with NERC BAL Standards, each Interconnection designates an Interconnection Time Monitor to monitor time error and to initiate or terminate corrective action when time error reaches predetermined limits. The PJM RTO is a part of the Eastern Interconnection. The Interconnection Time Monitor monitors the electric system time against true time, as measured by the National Institute of Standards and Technology (NIST) in Boulder, Colorado. When time error reaches ± 10 seconds, the Interconnection Time Monitor initiates a time correction. No time error corrections for fast time will be initiated between 0400 and 1100 CST hours Central Time. In response to the Interconnection Time Monitor, PJM implements the requested frequency schedule offset.

A time correction may be halted, terminated, or extended if the designated Interconnection Time Monitor or PJM determines system reliability conditions warrant such action.

After the premature termination of a manual time correction, a slow time correction can be reinstated after the frequency has returned to 60 Hz or above for a period of ten-10 minutes. A fast time correction can be reinitiated after the frequency has returned to 60 Hz or lower for a period of ten minutes. At least one-1 hour shall elapse, however, between the termination and re-initiation notices.

3.2.1 Time Error Correction Notification

The Interconnection Time Monitor issues the time correction information via a NERC hot-line conference call, and a message is posted on the RCIS. A frequency offset of ± 0.02 Hz starts and terminates on the hour or half-hour.

PJM Actions

- Step One — PJM dispatcher notifies the Transmission Owners/Generation Owners, via the PJM ALL-CALL, to announce that a time error correction is in effect. To correct for a slow or fast clock, system frequency schedules are offset by ± 0.02 Hz and given an assigned letter designator.
- Step Two — At the assigned time, PJM dispatcher inputs frequency schedule into the PJM EMS System using to 59.98 Hz to correct for fast-time error or 60.02 Hz to correct for slow-time error as directed by the Interconnection Time Monitor.
- Step Three — When the time error is reduced to specified levels, or if the time error is not corrected in a reasonable period, the Interconnection Time Monitor issues the order to return frequency schedule setters to 60.00 Hz. The Interconnection Time Monitor initiates a NERC hot-line conference call and posts a message on the RCIS. At this time,

PJM dispatcher resets the PJM EMS frequency schedule to 60.00 Hz at the assigned time.

- Step Four  PJM dispatcher notifies the Transmission Owners/Generation Owners via the PJM ALL-CALL of the cancellation of the time correction, and the time the scheduled system frequency will return to 60.00 Hz.
- Step Five  If reliability concerns develop during the execution of the time error correction, the PJM dispatcher notifies the Interconnection Time Monitor and requests that the time error correction be immediately terminated. Similarly, if reliability concerns are anticipated with a scheduled time error correction, the PJM dispatcher notifies the Interconnection Time Monitor to cancel the scheduled time error correction.

3.3 External Transactions Scheduling

3.3.1 Overview of External Transaction Scheduling

Market participants that wish to transact energy in-to, out-of or through the PJM RTO are required to make their requests to PJM via the NERC E-Tagging software. These requests must be consistent with the more restrictive of either NERC Standard INT-001 (Interchange Transaction Tagging) or the PJM External Transaction Scheduling rules contained within this manual. The NERC E-Tagging software interfaces with PJM's ExSchedule software to create an interface that both PJM mMarket participants as well as PJM tTransaction eCoordinators can use to evaluate and manage external transactions that affect the PJM RTO.

Based on market participant feedback, PJM has enhanced the ExSchedule tool to utilize NERC Ttags as the source for its external scheduling data. This change was done primarily to ease the amount of data entry required to submit external schedules in PJM, as well as to conform to general industry trends toward the use of the NERC Ttag as a schedule. This enhancement aids PJM in handling the increased number of external transactions presented by integration of other control areas in the PJM RTO. Market participants are no longer required to enter schedule data in both the ExSchedule system and on a NERC Ttag, as the NERC Ttag data is utilized by ExSchedule as the schedule.

This change highlights an issue of data responsibility because of the nature of eE-Ttagging, and the fact that PJM now uses information entered on an eE-Ttag as a schedule. Market participants scheduling in PJM are responsible for ensuring that data on PJM's ExSchedule is consistent with that which they desire to be their energy schedule. The continuity of the tagging process dictates that PJM receives its tag data in completed form from its tag authority, as it was entered by market participants. In order to ensure that this delivery of data is complete and accurate, the market participants are responsible for confirming the data in PJM's ExSchedule to ensure it is consistent with that which they desired for their energy schedule. This confirmation can take place by simply looking at the tag data through the ExSchedule user interface, or by viewing customer reports which are made available through ExSchedule.

An important aspect of scheduling external transactions in PJM is finding a start and end time to transact energy while respecting the PJM ramp limits imposed for security (see "Ramp Limits" section for additional information on PJM's ramp limits). PJM allows market participants to reserve ramp in advance of completing their transactions via the ExSchedule application. This is an optional step in making external transaction requests, as the NERC E-Tag serves as the actual request for scheduling in PJM.

In cases where the NERC eE-Ttag does not have the required fields to request a PJM market-specific transaction (e.g., dispatchable, Two-Settlement etc.) the ExSchedule application will be used in concert with the NERC eE-Ttag (see “Entering Dispatchable Schedules” and “Entering Two-Settlement Transactions” sections).

3.4 External Transaction Scheduling Business Rules

This section will outline the External Transaction Business Rules that are required by PJM. This section will include:

- PJM Contact Information
- External Transaction Timing Requirements
- General Information
- Data Requirements
- Ramp Limits
- OASIS Business Rules
- Entering Ramp Reservations
- Entering Schedules
- Entering Real-Time with Price Schedules
- Entering Two-Settlement Schedules
- Transaction Validations, Verification and Checkout

3.4.1 PJM Contact Information

The following numbers can be used to contact PJM regarding External Energy Transactions:

- Scheduling Fax number – 1 (610) -666-4275
- Day-Ahead Scheduling phone number – 1 (610) -666-4548, 1 (610) -666-8947 and 1 (610) -666-8949
- Hourly Scheduling phone number – 1 (610) -666-4510
- ExSchedule Hotline (used to report issues, or to ask questions during normal business hours) – 1 (610) -666-2270
- PJM Help Desk (used to report technical issues during non-business hours) – 1 (610) -666-8886

3.4.2 External Transaction Timing Requirements

The following timing requirements are imposed by PJM for the submission of ramp reservations:

- Ramp reservations can be made up to 30- minutes prior to the scheduled start time for hourly transactions.
- Ramp reservations can be made up to four- hours prior to start time for transactions that are more than 24 hours in duration.

- Ramp reservations utilizing the Real-Time with Price option must be made prior to 1200 noon (EPT) one-day prior to start time.

Ramp reservations expire if they are not used. The following timing requirements are imposed on ramp reservations that are not scheduled against.:

For ramp reservations less than or equal to 24 hours in duration:

- If the reservation is submitted one hour prior to the start of the schedule or less, the reservation will be held in Pending Tag status for 10 minutes.
- If the reservation is submitted more than one hour prior, but less than four hours prior to the start of the schedule, the reservation will be held in Pending Tag status for 15 minutes.
- Reservations that are less than 24 hours in duration, and submitted four or more hours prior to the start of the schedule, will be held in Pending Tag status for 90 minutes.
- Reservations made on a day-ahead basis will expire at 1430 EPT, one-day prior to the start of the schedule. Note that a ramp reservation will not be “split” into separate days, so if a ramp reservation is made for multiple days, and not scheduled against, and if the start time for the multi-day reservation is the next day, the entire reservation will expire.

Ramp reservations that have been placed in Queue will expire if sufficient ramp room does not become available. The following timing requirements are imposed on ramp reservations that have been placed in Queue:

- Reservations that are 24 hours or less in duration will be held in Queue status until 30 minutes prior to the start of the schedule.
- Reservations that are greater than 24 hours in duration will be held in Queue status until five hours prior to the start of the schedule.

The following timing requirements are imposed by PJM for the submission of Schedules. Schedules are submitted to PJM by submitting a valid NERC Tag. (The schedule is considered submitted when the NERC Tag is received by the PJM Tag Approval Service, not when it is submitted by the market participant's Tag Agent software):

- Schedules can be submitted up to 20 minutes prior to the scheduled start time for hourly transactions.
- Schedules can be submitted up to four hours prior to the scheduled start time for transactions that are more than 24 hours in duration.
- For a schedule to be included in PJM's Day-Ahead checkout process, Schedules they must be implemented by 1400 (EPT) one-day prior to start of schedule to be included in PJM's day-ahead checkout process.
- Schedules utilizing the Real-Time with Price option must be submitted prior to 1200 noon (EPT) one-day prior to start time.
- Schedules utilizing Firm IRM Point-To-Point Transmission Service must be submitted by 1000 (EPT) one-day prior to start of schedule. Transactions submitted after 1000 (EPT) one-day prior will be accommodated if practicable.

The following timing requirements are imposed by PJM for the submission of Two-Settlement Transactions:

- All Two-Settlement transactions must be submitted by 1200 noon (EPT) one-day prior to start time.

3.4.3 General Information

- External offers can be made either on the basis of an individual generator (resource-specific offer) or an aggregate of generation supply (aggregate offer).
- PJM will only accept the transaction if submitted by a member company.
- Transmission reservations that are not used due to canceled spot market offers will be subject to transmission charges as appropriate.
- PJM does not accept bids where the PJM Interchange Energy Market is identified as both the source (GCA) and sink (LCA).
- PJM does not accept offers for resources committed to supply operating reserves to another Balancing Area. PJM does not double count resources internal to PJM for operating reserves. If energy is being offered from a resource to PJM and is already included in the PJM operating reserves, the energy can be accepted, but does not participate in PJM operating reserves accounting.
- Offers not properly submitted are rejected. The PJM member is notified of the reason for rejection, and the PJM member may then take action to submit a new offer.

3.4.4 Data Requirements

Market participants are expected to keep PJM informed of all external transactions that involve the operation of the PJM RTO. The following information is submitted to PJM via the market participant's Ee-Tag agent service and/or ExSchedule:

- Valid NERC Ee-Tag
- Valid transaction path
- Start date before end date
- Start and end times in the future
- Requested megawattMW profile
- Valid transmission (see "OASIS Business Rules" for more information)
- Price associated with transaction (if utilizing the Real-Time with Price option)

3.4.5 Ramp Limits

PJM validates all external transaction requests against a net interchange ramp. The ramp limit is configurable by PJM dispatch based on operating conditions. There are two separate ramps that are evaluated — a PJM Nnet interchange rRamp, and a NYISO interchange rRamp.

- PJM Variable Rramp
 - o At no time, can the difference in the net interchange be greater than the ramp designated by the PJM dispatch at any given 15-minute interval. Ramp room is

allocated on a first-come, first-served basis. Refer to Exhibit 7 for a ramp example to see how the ramp is calculated for any given 15-minute interval.

- **NYISO 1000 MW rRamp**
 - o PJM also monitors a ± 1000 MW ramp with the NY ISO. At no time can the difference in the interchange between NY and PJM be greater than ± 1000 MW at any 15-minute interval. Ramp room for NY transactions is allocated on a first-come, first-served basis. NY transactions submitted to PJM will be evaluated against both the PJM ramp and the NY ISO ramp.

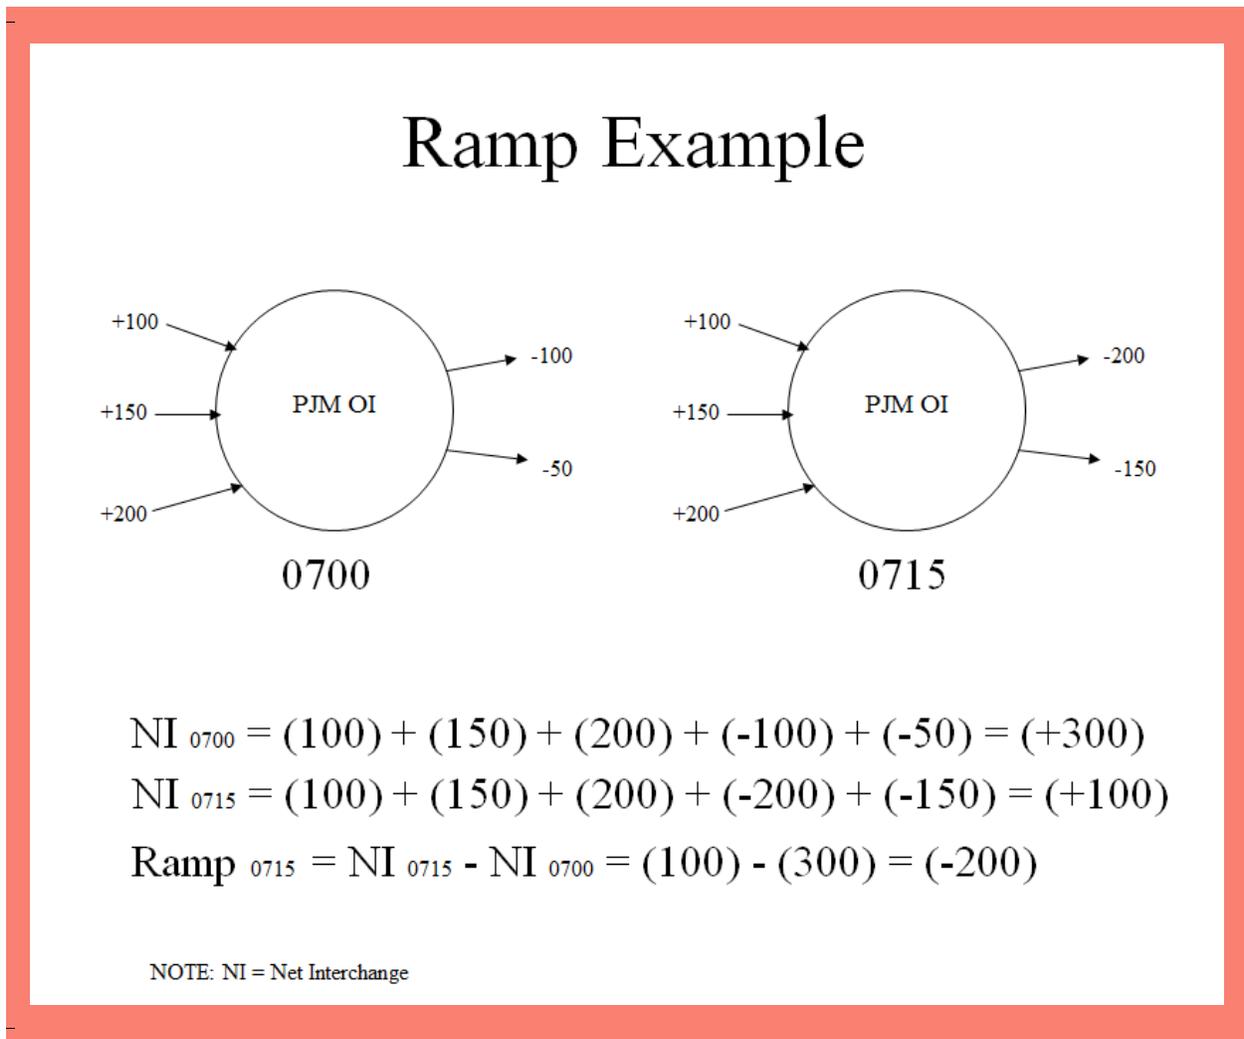


Exhibit 7: Example Ramp Calculation

3.4.6 OASIS Business Rules

All external transaction requests require a **confirmed** CONFIRMED transmission reservation from the PJM OASIS. PJM offers several transmission product types, such as hourly, daily, weekly, monthly, yearly, on- and off-peak, non-firm, firm and network transmission. PJM also offers the opportunity to state whether or not the market participant is willing to pay congestion.

These, and additional options, are further explained in the “PJM Regional Practices” document, which can be found on the PJM OASIS home page at <http://oasis.pjm.com>.

On some occasions, due to PJM ramp rules, market participants are required to shift their energy requests. If the market participant shifts their energy up to one hour in either direction, they are not required to purchase additional transmission. Likewise, if the market participant chooses to fix their ramp violation by extending the duration of the transaction, they do not have to purchase additional transmission if the total megawatt-hour MWh capacity of the transmission request is not exceeded. For graphical representations of these scenarios, refer to Exhibit 8 through Exhibit 11.

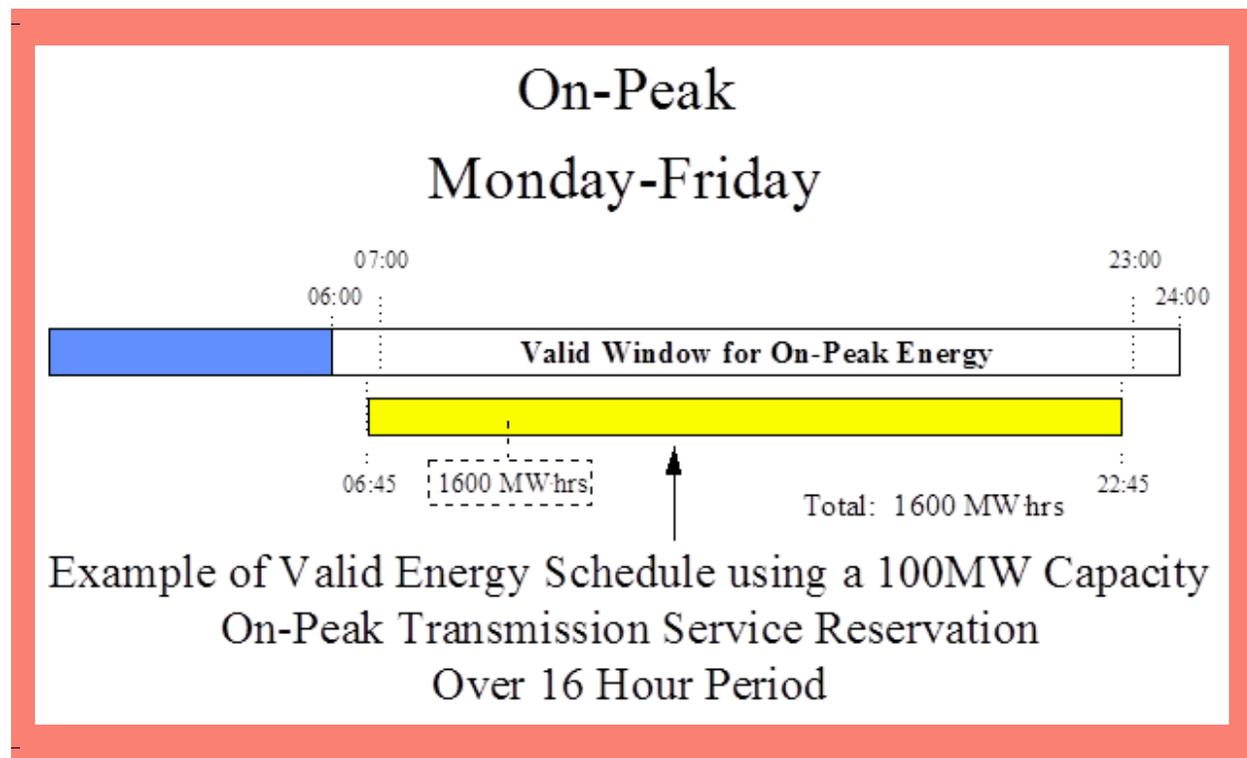


Exhibit 8: ~~On-Peak Transmission Service Over 16-Hour Period Example~~

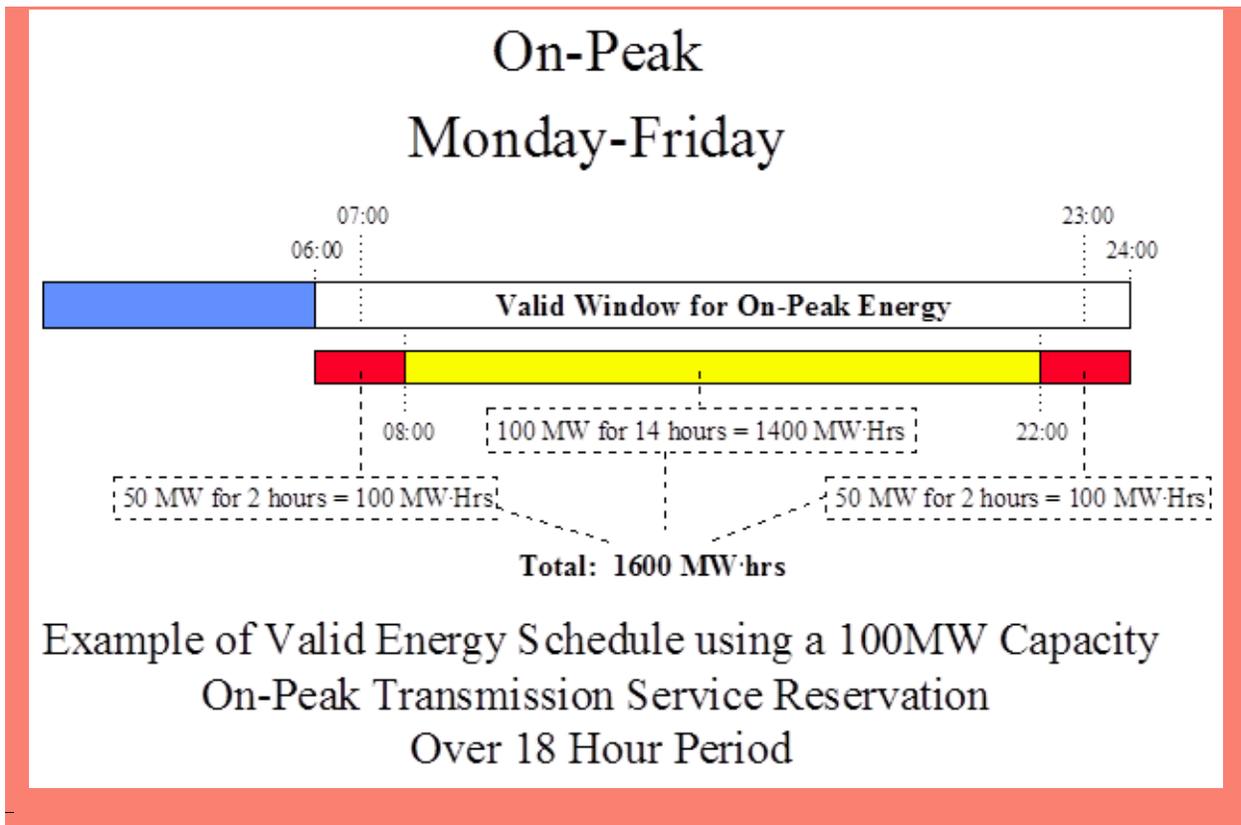


Exhibit 9: **On-Peak Transmission Service Over 18-Hour Period Example**

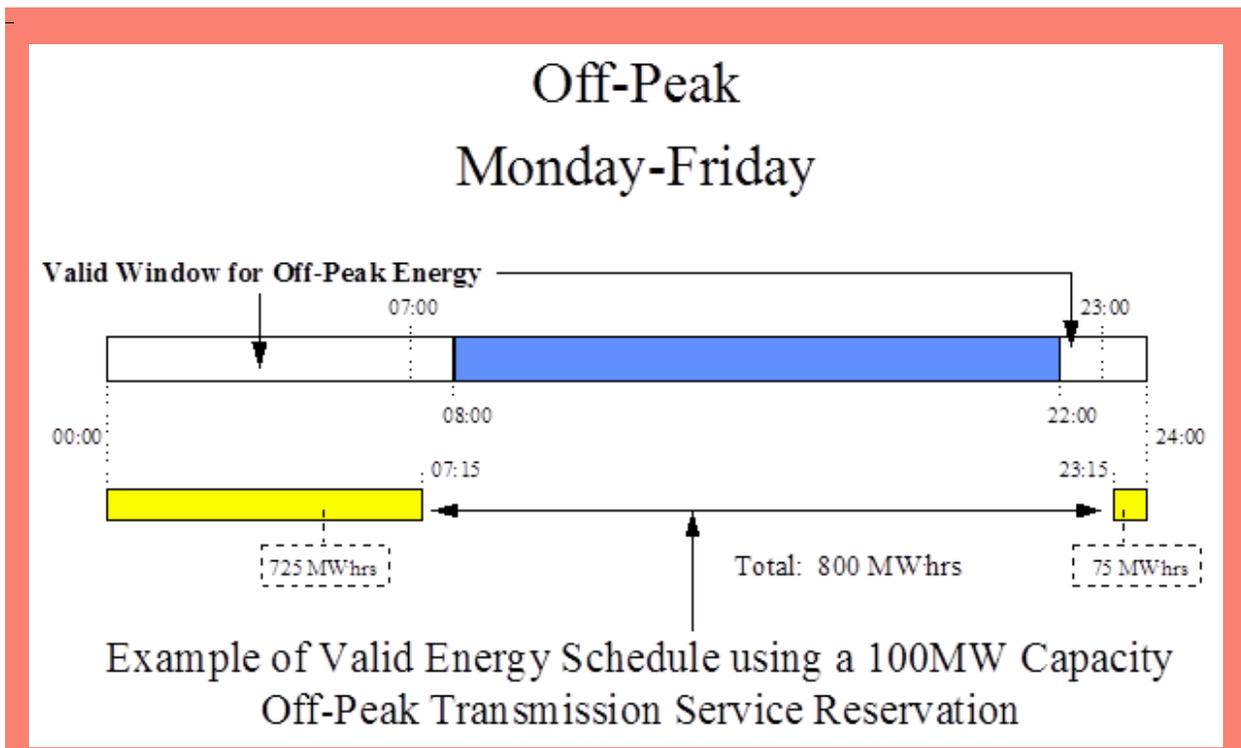


Exhibit 10: ~~Off-Peak Monday--Friday Transmission Service Example~~

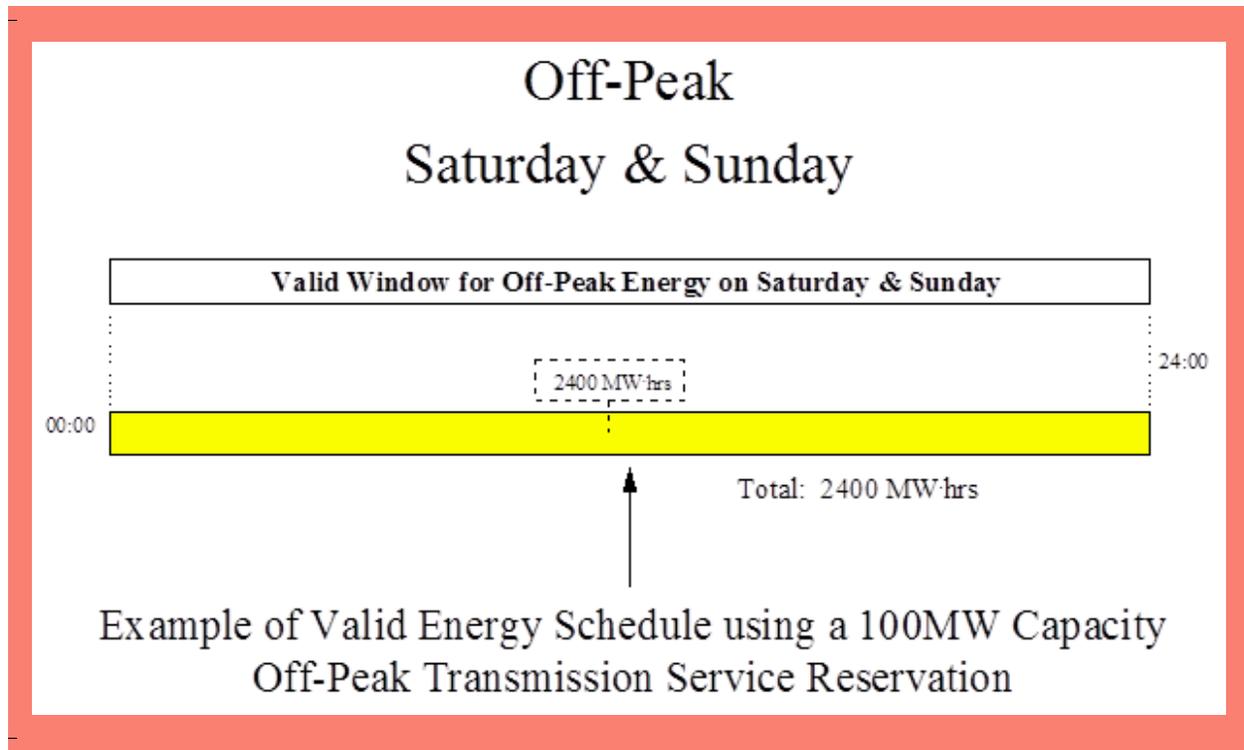


Exhibit 11: ~~Off-Peak Saturday--Sunday Transmission Service Example~~

Frequently Asked Questions (regarding on-peak and off-peak energy scheduling):

- (Q1) A market participant has reserved off-peak daily transmission for Wednesday, but ramp room is not available at 07:00 or 23:00.
- (A1) Two possible solutions are 1) the energy may be scheduled from 00:00 to 08:00; or 2) the energy may be scheduled from 00:00 to 07:15 and from 23:15 to 24:00.
- (Q2) A market participant has reserved on-peak weekly transmission. Ramp room is available from 07:00 to 23:00 Tuesday through Friday, but ramp room is not available at 07:00 or 23:00 on Monday.
- (A2) The energy may be scheduled 07:00 to 23:00 Tuesday through Friday. One solution to the Monday ramp limit is to schedule the energy from 06:45 to 22:45.

3.4.7 Entering Ramp Reservations

Each PJM Member cCompany that is authorized to do business in PJM's Eenergy Mmarket is given an ExSchedule account. It is in the ExSchedule application that ramp reservations are made.

Ramp reservations are an optional step in scheduling transactions in PJM. A ramp reservation can be made to "hold" ramp room while market participants complete their scheduling responsibilities. Ramp reservations are then associated on the NERC Tag when the market

participant wishes to submit the schedule. The ramp reservation is validated against the submitted NERC Tag to ensure the energy profile and path matches. Ramp reservations are generally used to ensure the ability to schedule prior to purchasing transmission or making other potentially cost-affecting decisions.

To make a ramp reservation, the market participant enters the ExSchedule application, and navigates to the “Ramp Reservation” screen. On this screen, the market participant enters the path for which they are interested in transacting energy, their energy profile, and any other unique information that may apply to a schedule (e.g., i.e. special exceptions, notes, outside ID’s, internal naming conventions etc.). Upon submission of a ramp reservation, PJM validates the information against ramp availability. If it passes the current ramp limits, the ramp reservation will pass, and will move into a status of P“pending Ttag.”. At this point, the market participant is holding a valid reservation that can then be associated on a NERC Tag for scheduling.

3.4.8 Entering Schedules

Market participants enter schedules in PJM by submitting a valid NERC Tag. As noted in the previous section, if the market participant holds a ramp reservation in the status of “Pending Tag”, they can associate the ramp reservation on the NERC Tag. This is done by placing the ramp reservation in the “mMiscellaneous” column on the PJM Transmission Provider line, of the P“physical Ssegment” portion of the NERC Tag.

If no ramp reservation was made prior to scheduling, a NERC Tag can be submitted without a reservation. NERC Tags that are submitted without a ramp reservation will automatically have a ramp reservation created that matches the energy profile and path of the NERC Tag. This newly created reservation will be evaluated against ramp, and an approval or denial will be made based on the validation. If there is enough ramp room, PJM will continue with other validations (See “Transaction Verification and Checkout”). If all validations pass, an approval message will be sent to the NERC Tag, and upon **implementation** IMPLEMENTATION of the NERC Tag, the transaction will be scheduled by PJM.

Because of the nature of NERC Ttagging, it is possible for the market participant who enters a NERC Ttag to not be consistent with the market participants listed for each TP segment on a particular tag. In this instance, the financially responsible party (FRP) entering the tag is effectively acting on behalf of other market participants that are listed. Because PJM will now be identifying a NERC tTag as a market participant’s schedule, it will be necessary for those market participants who have had a tag entered on their behalf to acknowledge this tag through the ExSchedule.

3.4.9 Entering Real-Time with Price Schedules

Real-Time with Price schedules differ from other schedules in that an action **must** be made in ExSchedule in addition to the submission of a NERC Tag. To enter a Real-Time with Price schedule, the market participant must first make a ramp reservation in ExSchedule using the “Real-Time with Price” tab in the notebook section of the ramp reservation screen. In addition to the information entered for a RReal-TTime schedule, market participants are also required to enter a price associated with each energy block. Upon submission, the Real-Time with Price request will automatically move to the “Pending Tag” status, as Real-Time with Price schedules do not hold ramp.

Once the information is entered in ExSchedule, a NERC Tag must be submitted with the ramp reservation associated on the NERC Tag. This is done by placing the ramp reservation in the

“mMiscellaneous” column on the PJM Transmission Provider line, of the “pPhysical sSegment” portion of the NERC Tag. For Real-Time with Price schedules, the NERC Tag energy profile must match exactly for the tag to be approved.

3.4.10 Entering Two-Settlement Schedules

Market participants can submit Two-Settlement schedules to the eMarket application through ExSchedule. These schedules do not require a NERC tTag, as they are only financial obligations, and are not considered physical schedules for actual flow. Two-Settlement schedules are submitted using the “Two-Settlement” tab in the notepad section of the ramp reservation screen.

Two-Settlement schedules require an OASIS number to be associated upon submission. The path is identified on the OASIS reservation.

In addition to the selection of OASIS and pricing points, the market participant must enter their energy profile. The option to choose fixed, dispatchable and up-to are also displayed in the notepad section. The type “fixed” acts as a price taker, “dispatchable” sets a floor or ceiling price criteria for acceptance, and “up-to” sets the maximum amount of congestion the market participant is willing to pay for acceptance in the Two-Settlement mMarket. Graphing energy is done the same way as a Real-Time or Real-Time with Price request.

3.4.11 Transaction Validations, Verification and Checkout

Transactions must pass specific validations and evaluations prior to being scheduled. The following validations and evaluation and checkout procedures are done to ensure accurate information and reliable scheduling in PJM:

Validations

On submission, the following validations are performed on ramp reservations:

- Path identified
- Stop time after start time
- Energy Pprofile identified
- Price associated with Eenergy Pprofile (only applicable for Real-Time with Price)
- Ramp Aavailability (not applicable for Real-Time with Price)
- Timing Rrequirements are met for submission deadlines

On submission, the following validations are performed on NERC Tags:

- Syntax validation (See NERC Tagging Policy for complete list of syntax validations for NERC Tags)
- Path on NERC Tag matches ramp reservation (if identified) and OASIS path
- Timing requirements are met for submission deadlines
- PJM lLoss type must be financial (FIN)
- Ramp availability (if no ramp reservation is identified)
- OASIS validation for valid OASIS, valid path, instantaneous capacity, total capacity, date-time, priority and vertical stacking (not allowed)

- Token and Value fields (in miscellaneous column) have valid inputs
- FRP check

On submission, the following validations are performed for Ttwo-Ssettlement requests:

- Path identified
- Timing requirements are met for submission deadlines
- OASIS validation for valid OASIS, ensure that the reservation is willing to pay congestion, OASIS is valid for period covered by the Ttwo-Ssettlement contract and capacity checks
- Pricing point(s) have been identified
- Stop time is after start time
- Energy profile is identified
- Price is associated for energy profile (for dispatchable option only)
- Congestion amount is identified for energy profile (for up-to-congestion option only)
- Real-Time eEvaluation and cCheckout
- If all validations pass on a Real-Time schedule, PJM will approve the tag. Once the tag is approved by all parties associated on the tag, and the status of the tag becomes **implemented**“IMPLEMENTED”, the schedule will be ready for the Balancing Area to Balancing Area cCheckout. If during the Balancing Area to Balancing Area checkout, both parties agree to the interchange on the NERC Tag, the schedule will flow.

Real-Time with Price Evaluation and Checkout

Real-Time with Price schedules are verified differently than Real-Time schedules. Real-Time with Price schedules are evaluated hourly to determine if they will be loaded or not for the upcoming hour. This evaluation is done by the PJM gGeneration dDispatcher. If the dispatcher feels that the economics for the schedule warrant the transaction to be loaded or unloaded, they will inform the transaction coordinator to load or unload the contract. This evaluation is based on a very conservative approach, and it works similarly to the way the generation dispatcher would call on or off generation. In addition to the economics of the transaction, the generation dispatcher may also take into consideration the ramp availability for the loading or unloading of the schedule. Since Real-Time with Price schedules do not hold ramp room, there may be times where the economics warrant a schedule to be loaded, but due to security issues related to ramp, the schedule will not be called on to flow. Once a Real-Time with Price schedule has been called on to flow, a reload request will be issued by the PJM tTransaction cCoordinator. If all external parties approve the reload request, and it passes the Balancing Area to Balancing Area checkout process, the schedule will flow.

Two-Settlement Evaluation and Checkout

For Two-Settlement scheduling, ExSchedule serves only as an interface to the eMarket application. Two-Settlement transactions are evaluated by the PJM Markets Department, and the results are fed back to ExSchedule to allow market participants to view the results. There is no cCheckout performed on Ttwo-Ssettlement schedules, as they are considered financially binding transactions, not physical schedules.

3.5 Inadvertent Interchange

Hourly Inadvertent Interchange is defined as the difference between hourly net actual interchange and hourly net scheduled interchange of a Balancing Authority. Attachment E provides additional detail regarding BAL standard reporting requirements. It is caused by any of the following factors:

- Bias response to frequency deviations occurring on the interconnected system
- Metering errors (methods of correction details are discussed in the PJM Manual 28, for Operating Agreement Accounting (M28), Section 11.12, Metering Reconciliation Accounting
- Inability of system generation to exactly match load and/or net interchange schedule changes

Hourly Inadvertent Interchange may accumulate in a balancing area Balancing Authority Area as a megawatt-hour credit or debit. It is accounted for each month. PJM maintains a record of the PJM RTO's accumulated Inadvertent Interchange for both On- and Off-Peak periods as required by the applicable NERC and NAESB standards.

Over time, PJM attempts to minimize the amount of accumulated Inadvertent Interchange. This is accomplished by continually monitoring and correcting for Inadvertent Interchange. The portion of Inadvertent Interchange caused by frequency bias is self-compensating if no additional action is taken by a PJM dispatcher. This is because, on the average, frequency deviations are low as often as they are high. In order for time error to average zero, the Inadvertent Interchange that flows as the result of frequency bias contribution is balanced automatically by the tie-line bias control.

3.5.1 Correcting for Accumulation of Inadvertent Interchange

It is the responsibility of PJM dispatcher to correct for the accumulation of Inadvertent Interchange.

PJM Actions

The reduction of an accumulation (on an On-Peak Period or Off-Peak Period basis as defined above) of Inadvertent Interchange is accomplished by one of the following two methods:

- Unilateral Payback — Inadvertent Interchange accumulations may be paid back unilaterally by controlling to a target of non-zero ACE. Controlling to a non-zero ACE ensures that the unilateral payback is accounted for in the CPS calculations. The unilateral payback control offset is limited to PJM's L10 limit and shall not burden the Interconnection.
- Bilateral Payback — Bilateral Payback is scheduled with another Balancing Authority and is accomplished as follows:
 - o Inadvertent Interchange accumulation may be reduced by scheduling a correction with any adjacent Balancing Authority, provided they have an accumulation in

the opposite direction. The amount of schedule established by a PJM dispatcher is determined by the following factors:

- Amount of Accumulated Inadvertent Interchange
- Current net interchange schedule in effect
- Current state of the PJM Balancing Authority Area with respect to load and transmission facilities
- If a schedule cannot be established with the adjacent Balancing Authority, correction of Inadvertent Interchange accumulations may be scheduled with a remote Balancing Authority, provided that the intervening Balancing Authority dispatchers are advised of such schedules and are agreeable.
- There may be times when the adjacent Balancing Authority desires to establish a schedule to reduce Inadvertent Interchange accumulations with Balancing Areas Authorities other than the PJM RTO.

3.5.2 Measurements and Compliance

In accordance with NERC INT Standards, PJM will coordinate interchange transactions per the respective established Operating Agreements.

PJM Members' Actions

None.

3.6 Primary Frequency Response

Primary Frequency Response is the first stage of frequency control and is the response of generator governors and loads to arrest locally detected changes in frequency.

Primary Frequency Response is automatic, is not driven by any centralized system, and begins within seconds after the frequency changes, rather than minutes.

Primary frequency is essential for reliability of the Interconnection and is:

- The first line of defense
- Critical for system restoration
- Needed for accurate modeling and event analysis
- Necessary for compliance with NERC Standard BAL-003-1, Frequency Response and Frequency Bias Setting

3.6.1 Generator Primary Frequency Response Evaluation

Generating resources' expected performance will be calculated using the primary frequency control calculation, taking into account the droop, deadband, and operating requirements in PJM Manual 14D, Generator Operational Requirements, Section 7.1, Dispatching of Generation. Verification of droop and deadband settings should be performed by the resource owner.

- Frequency below governor deadband:

$$MW_{PrimaryControl} = \left[\frac{(HZ_{actual} - 60 + DB)}{(60 * Droop - DB)} \right] * (FrequencyResponsiveCapacity) * (-1)$$

- Frequency above governor deadband:

$$MW_{PrimaryControl} = \left[\frac{(HZ_{actual} - 60 - DB)}{(60 * Droop - DB)} \right] * (FrequencyResponsiveCapacity) * (-1)$$

Where Frequency Responsive Capacity represents the available operating capacity of the generating resource at the time of the event.

When resources are ramping prior to an event, response will be offset by that ramp rate. The ramp rate will be calculated for a resource 10 minutes prior to the event start and the expected response will be adjusted for this ramp as below:

$$\text{Actual Response} = (\text{AvgMW}_{20-52\text{sec}} - \text{AvgMW}_{-16-0\text{sec}}) - \text{Ramped MW during event}$$

Exclusions to the frequency response performance evaluation will include:

- Nuclear generation
- Units offline during the event
- Units that have no available headroom/footroom
- Units that are assigned regulation
- Units that have an active eDART ticket for governor outage

If PJM determines that a unit is not providing Primary Frequency Response based on the performance evaluation, PJM will work with the Generation Owner and review additional variables to support performance improvements, including but not limited to, telemetry, operating scenarios, generator hold points and non-functioning governor equipment.

3.6.2 Event Selection

PJM will evaluate generators during periods of large system frequency deviations. PJM targets two to three frequency events per month for evaluation, but no set number of events will be defined since events are based on system conditions. Selected events and event selection criteria will be reviewed quarterly with the Operating Committee for continued performance and applicability. The criteria required for event selection:

- Frequency goes outside +/- 40mHz deadband
- Frequency stays outside +/-40mHz deadband for 60 continuous seconds
- Minimum/Maximum frequency reaches +/- 53mHz

A quarterly review will look at an average performance over a 12-month window. PJM will require a minimum of three applicable events for a resource to perform the performance review (event selection will go back further than 12 months if needed in this case). Each event will be evaluated separately and the performance will be averaged for responsive/non-responsive determination. A 50 percent or greater average performance will be considered frequency responsive.

Section 4: Providing Ancillary Services

Welcome to the *Providing Ancillary Services* section of the ***PJM Manual for Balancing Operations***. In this section you will find the following information:

- How PJM monitors and restores reserves (see “Reserves”).
- How PJM determines and assigns Regulation (see “Regulation”).
- How a generating resource is tested and qualified for Regulation service (see “Qualifying Regulating Resources”).
- How PJM ensures and monitors Black Start Service (see “Black Start Service”).

4.1 Reserves

Reserves are the additional capacity above the expected load. Scheduling excess capacity protects the power system against the uncertain occurrence of future operating events, including the loss of capacity or load forecasting errors.

4.1.1 Monitoring Reserves

PJM is responsible for monitoring and adjusting the reserves to ensure compliance with NERC, SERC, and RFC BAL standards for the PJM Balancing Area Authority. On a daily basis, the PJM dispatcher performs an Instantaneous Reserve Check (IRC) prior to each peak, or more often as system conditions require, to determine if adequate reserves exist to meet the PJM Reserve reserve Requirements requirements. An IRC may be taken more frequently if system conditions dictate. When the PJM Generation generation dispatcher requests an IRC, member dispatchers report the information via eDART. If eDART is unavailable, member dispatchers report the information directly to the PJM Generation generation dispatcher. Attachment A presents and describes the PJM IRC report.

An IRC provides the PJM dispatcher with an indication of the actual reserves that are available at that point in time. By conducting an IRC at strategic points during the day, the PJM dispatcher establishes benchmarks between which the actual reserve can be estimated. Since system conditions can change very rapidly, the IRC is only an indication of the actual reported reserves at that point in time. The PJM dispatcher uses the results of the IRC to determine if reserve shortages exist and what, if any, Emergency Procedures should be declared to supplement the electronic reporting of reserves through the EMS systems.

When the PJM Net Tie Deviation indicates under under-generation, the Synchronized Reserve total is adjusted downward by the amount of the Net Tie Deviation to reflect the PJM Balancing Authority area's Area's generation deficiency. Conversely, when the PJM Net Tie Deviation indicates over over-generation, the Synchronized Reserve total is adjusted upward by the amount of the Net Tie Deviation to reflect the PJM Balancing Authority area's Area's generation excess. Therefore, when possible, the PJM dispatcher requests an IRC when the ACE and Net Tie Deviation is close to zero 0 MW.

PJM Actions

- **Step One** – Using the PJM ALL-CALL, PJM dispatcher requests an IRC.
- **Step Two** – Upon receipt of all Generation Owner reports, PJM dispatcher determines the following values:

- o PJM Operating Reserve
- o Adjusted Primary Reserve versus Primary Reserve Requirement
- o Adjusted Synchronized Reserve versus Synchronized Reserve Requirement
- o Area Synchronized Reserve levels
- **Step Three** – PJM dispatcher compares the values calculated in Step Two to the corresponding objectives and then determines whether reserve deficiencies exist.
- **Step Four** – Using the PJM eDART, the PJM dispatcher reports the results of the IRC to the Generation Owners/Transmission Owners.
- **Step Five** – Where applicable, the PJM dispatcher follows up with the Generation Owner or PJM Support support Personnel personnel around any Adjusted adjusted Values values that stem from invalid Market market data.

PJM Member Actions

- **Step One** – The Generator Generation Owner responds to an IRC request as requested by PJM.
- **Step Two** – The Generation Owners promptly reports the following values on a discrete unit unit-by-by-unit level to PJM via the eDART IRC application. If eDART is unavailable, the values are reported directly to a PJM dispatcher via telephone.
 - o Synchronous Synchronized Reserve (Regulating)
 - o Synchronous Synchronized Reserve (Non-Regulating)
 - o Non-Synchronized (Quick-Start) Reserves
 - o Secondary Reservereserve
 - o Beyond Secondarysecondary reserve
- **Step Three** – Where applicable, the Generation Owner adjusts any individual generation values (such as EcoMax, ramp rate, availability) that are causing a mismatch between PJM and Generation Owner calculations.

See Attachment A for reserve calculations and IRC reporting requirements.

4.1.2 Loading Reserves

During disturbance conditions (i.e., e.g., loss of generation and/or transmission resources), synchronized Synchronized reserve Reserve and, to the extent necessary, Non-Synchronized Reserves are used to recover the ACE so that tie line schedules are maintained. Depending on system conditions, the manual methods may be used to accomplish this recovery. Based on system conditions and the ability of regulation to recover, PJM operators will evaluate the need to implement its Contingency Reserve upon the contingent loss of generation, equal to 80% percent or more of its most severe single contingency.

- Manual Method — Includes raising the Lambda signal manually and committing additional equipment.

PJM Actions

- PJM dispatcher determines the approximate amount and location of lost generation, and the amount of Synchronized Reserve that must be loaded to:
 - o Correct for the sudden loss of generation located within the PJM Balancing ~~Authority~~ ~~area~~ ~~Area~~ (as indicated by the PJM Balancing ~~area's~~ ~~Authority's~~ ACE and system frequency deviations)
 - o Return interchange transfers or other thermal or reactive limitations to within the appropriate limits
- Implement 100% ~~percent~~ ~~synchronized~~ ~~Synchronized~~ ~~reserves~~ ~~Reserves~~ and/or ~~contingency~~ ~~Quick-Start~~ ~~reserves~~ ~~Reserves~~ (quick start) if ~~the unit loss > is greater than 80% percent of the largest unit contingency and~~ there is insufficient regulation and economic generation to recover the ACE within DCS (BAL standards). A Reportable Balancing Contingency Event is the lesser of 900 MWs in the Eastern Interconnection or 80 percent of the Most Severe Single Contingency.
- PJM dispatcher requests the ~~Resource~~ ~~resource~~ ~~Owner~~ ~~owner~~, via the PJM ALL-CALL, to load a percentage (25%, 50%, 75%, or 100%) ~~percent~~ of the Synchronized Reserve (typically 100%) ~~percent~~ in the appropriate control zone(s). PJM has several Synchronized Reserve market areas. The dispatchers will select the most effective response respecting the requirements of the regional reserve sharing programs in which PJM is a participant.
- If specific equipment is excluded from the request, ~~the~~ PJM dispatcher calls the appropriate ~~Resource~~ ~~resource~~ ~~Owner~~ ~~owner~~ immediately following the PJM ALL-CALL message.
- If transmission limits exist, or may be caused by loading Synchronized Reserve and Non-Synchronized Reserve in certain geographic areas or control zones, ~~the~~ PJM dispatcher specifies the areas or control zones that are to be included in the request for Synchronized Reserve.
- If ~~the~~ PJM dispatcher anticipates that loading of Synchronized Reserve may continue for longer than ~~ten~~ ~~10~~ minutes, ~~the~~ PJM dispatcher includes this statement in the PJM ALL-CALL message.
- ~~The~~ PJM ~~Dispatcher~~ ~~dispatcher~~ contacts external systems to implement ~~Shared~~ ~~shared~~ ~~Reserves~~ ~~reserves~~ (as required).
- PJM dispatcher also requests the loading of an appropriate amount of ~~non~~ ~~Non~~ ~~synchronized~~ ~~Synchronized~~ ~~reserve~~ ~~Reserve~~ (as required).
- If ~~the~~ PJM dispatcher determines that the Synchronized Reserve that is being loaded is not sufficient to recover the system from a facility malfunction or failure, ~~the~~ PJM dispatcher requests ~~synchronized~~ ~~Synchronized~~ Supplemental Reserve to be loaded (as required).
- As the ~~Resource~~ ~~resource~~ ~~Owner~~ ~~owner~~ dispatchers load the reserves, ~~the~~ PJM dispatcher evaluates the effect. ~~The~~ PJM dispatcher surveys the resources loaded and determines generation that is needed to remain loaded and the replacement resources that can be returned to normal status so that the PJM Balancing ~~area~~ ~~Authority~~ load can be economically carried at a new price level.
- ~~The~~ PJM dispatcher cancels the requests, as appropriate.

PJM Members Actions

- Resource owners that elect to use their assets to respond to an event shall, without regard to price and as quickly as possible, load the requested percentage of Synchronized Reserve and Non-Synchronized Reserve. PJM Members responding to the event will continue to load resources until directed by the PJM dispatcher to discontinue. Resources providing ~~regulation~~ Regulation service should only provide Synchronized Reserves to the extent that they can quickly resume accurate ~~regulation~~ Regulation control following the event.
- Upon cancellation, the ~~generation~~ Generation ~~owner~~ Owner dispatchers unload the Synchronized and Non-Synchronized Reserve, as directed by the PJM dispatcher.

4.2 Shared Reserves

Shared Reserve Activation is a procedure between the Northeast Power Coordinating Council (NPCC) and the PJM Mid-Atlantic Control Zone (former MAAC region member companies) to jointly activate a portion of their ~~ten~~10-minute reserve following any of the following situations:

- Generation or energy purchase contingencies equal to or greater than 500 MW (300 MW for Maritimes) occur under conditions where activation assists in reducing a sustained load/generation mismatch
- Two or more resource losses below 500 MW (300 MW for Maritimes) within ~~1~~one hour of each other;
- Periods of significant mismatch of load and generation

The participating systems in NPCC shared reserves are the ISO New England (ISO NE), the New York Independent System Operator (NYISO), PJM East Control Zone, Maritimes, New Brunswick and Independent Electricity Market Operator (IESO formerly IMO of Ontario). The objective is to provide faster relief of the initial stress on the interconnected transmission system. The NPCC Operating Reserve Policy and the Operating Reserve Policies of all NPCC areas and of the PJM Mid-Atlantic Control Zone are not changed by any of the provisions of this plan.

The NYISO acts as the plan coordinator.

PJM Actions

If the loss of generation/purchase is located in the NPCC:

- The NYISO supervising dispatcher assigns the PJM Mid-Atlantic Control Zone a share of reserve pick-up. NYISO indicates the amount of participation.
- PJM dispatcher manually adjusts regulation, loads generation, or Synchronized Reserve in selected areas or across the entire PJM Mid-Atlantic Control Zone based on transfer limitations. This assistance is implemented at a ~~zero~~zero-time ramp rate immediately following allocation notification. Response by assisting balancing areas shall respond as quickly as possible, assuming the same obligation as if the contingency occurred within the balancing area. This should be implemented via manually adjusting regulation if possible.

- PJM dispatcher notifies the NYISO supervising dispatcher that PJM Mid-Atlantic Control Zone's reserve pick-up is completed.
- When the contingent system satisfies its ACE requirements, they notify the NYISO supervising dispatcher, who requests all participants to cancel their shared reserve allocations (normally ~~ten~~ 10 minutes, but no longer than 30 minutes) when the generator loss is replaced. The assistance provided by the PJM Mid-Atlantic Control Zone is ramped out at a ~~ten~~ 10-minute ramp rate.
- When the PJM Mid-Atlantic Control Zone completes its reserve pick-up, ~~the~~ PJM dispatcher notifies the Local Control Centers to cancel Synchronized Reserve loading.

If the loss of generation/purchase is located in the PJM Mid-Atlantic Control Zone:

- PJM dispatcher activates 100% ~~percent~~ Synchronized Reserves and notifies the NYISO supervising dispatcher of generation loss, and includes any special requests. For example, for the loss of a large eastern unit, PJM dispatcher may request IMO not to participate.
- The NYISO supervising dispatcher activates shared reserves and notifies PJM dispatcher, via conference call, of the ~~ten~~ 10-minute reserve amount that NPCC members contribute.
- PJM dispatcher terminates shared reserves (normally ~~ten~~ 10 minutes, but no longer than 30 minutes) when the generation loss is replaced.

4.2.1 Payback

Currently, payback ~~mwhs~~ MWh are not required for NPCC Shared Reserve Events.

PJM Member Actions

None

4.2.2 Restoring Reserves

By continuously monitoring reserves, ~~the~~ PJM dispatcher ensures that reserve levels are maintained in accordance with NERC BAL Standards. During normal operation, ~~the~~ PJM dispatcher loads the system based on ~~economy~~ ~~economics~~ while monitoring the available reserves. If, however, based on the best judgment of ~~the~~ PJM dispatcher after evaluating the results of the IRC, reserve deficiencies exist on the system, the following actions are taken, dependent on the deficiency:

- Synchronized Reserve Deficiency — Normally, restoration of Synchronized Reserve is accomplished by condensing CTs, notifying interruptible load resources, or loading Non-Synchronized Reserve or Supplemental Reserve to a minimum level to provide sufficient Synchronized Reserve or to the economic energy level to allow equipment (i.e., steam units) to back down to provide sufficient Synchronized Reserve.
- Primary Reserve Deficiency — When ~~the~~ PJM dispatcher is assured that the Synchronized Reserve objective is covered, ~~the~~ PJM dispatcher attempts to eliminate any Primary Reserve deficiency. Restoration is accomplished by any combination of the following actions:

- o Loading Supplemental Reserve to Primary Reserve status or providing additional Primary Reserve on other equipment.
- o Bringing additional equipment which is available but not scheduled to operate into the Primary Reserve status.

That portion of the Primary Reserve deficiency that is due to an adjustment to the internal PJM Primary Reserve as a result of a net non-capacity interchange scheduled into PJM can be tolerated provided system reliability is not degraded. On these occasions, the PJM dispatcher ensures that sufficient shutdown CT and/or hydro capability are readily available to cover the amount of the deficiency.

- Operating Reserve Deficiency — When the PJM dispatcher is assured that both the Synchronized and Primary Reserve objectives are covered, the PJM dispatcher attempts to eliminate any deficiency in Operating Reserve. Sufficient reserve is maintained for coverage of load-forecast uncertainty and probable additional failure or malfunction of generating equipment. The decision of whether to replenish Operating Reserve is based on the PJM dispatcher's best judgment. The PJM dispatcher may choose to replenish all, some, or none of the Operating Reserve during the operating day.

4.3 VACAR Reserve Sharing

PJM, on behalf of Dominion-Virginia Power, participates in the VACAR reserve sharing group, which consists of Dominion-Virginia Power, Duke Power, South Carolina Electric and Gas, Progress Energy-Carolinas, and South Carolina Public Service Authority. The purpose of the agreement is to share reserves to enhance reliability and to decrease the cost of maintaining reserves for each system.

Upon the telephone request of a member, the responding member will provide reserve energy for a period of up to 12 hours to support the needs of the requesting member.

PJM Actions

- Respond to requests for assistance due to a contingency event, as requested by another member, by scheduling delivery of VACAR reserve energy to the requesting member for delivery at the border between PJM and the CPL balancing area.
- Request the scheduling of VACAR reserve energy from other VACAR members if needed. Energy will be received at the CPL balancing area border with PJM.

Dominion-Virginia Power Actions

- Performs billing and provides compensation, as applicable, for reserve energy received by PJM called for on behalf of Dominion or provided by PJM on behalf of Dominion to another VACAR member.

4.4 Regulation

The PJM RTO is a single Balancing Authority Area consisting of multiple Control Zones. Resource owners providing Regulation are required to comply with standards and requirements of Regulation capability and dispatch, as described in this section.

PJM requires that all regulating generation resources be equipped with an Automatic Generator Control (AGC) scheme to receive, process and respond to regulation signals. Demand response resources providing ~~regulation~~ Regulation must have a similar control system.

4.4.1 PJM RTO Regulation Market Obligations

The Regulation ~~Requirement~~ requirement for the PJM RTO can be found in this manual in Section 4.4.3, ~~“Determining Regulation Assignment.”~~ The resources assigned to meet this requirement must be capable of responding to the AR signal immediately, achieve their bid capability within five minutes and must increase or decrease their outputs at the ramping rates that are specified in the data that is submitted to PJM.

The PJM RTO requires that the Regulation range of a resource is at least twice the amount of Regulation assigned, and that the resource can symmetrically provide the total amount of Regulation assigned (a full raise and lower of assigned regulation from set-point) as illustrated in Exhibit 12 below.

Demand Response resources providing Regulation are required to fulfill the ~~regulation~~ Regulation range requirements without injecting energy into the Bulk Electric System (BES).

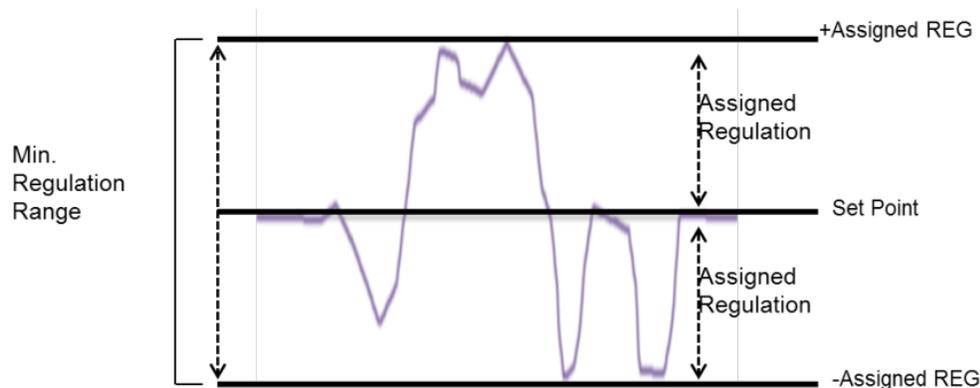


Exhibit 12: Assigned Regulation and Regulation Range requirements

A resource capable of automatic energy dispatch that is also providing Regulation reduces its energy dispatch range by the ~~regulation~~ Regulation assigned to the resource. This redefines the energy dispatch range of that resource. (The resource's assigned ~~regulation~~ Regulation subtracted from its ~~regulation~~ Regulation maximum forms the upper limit of the new dispatch range, while the resource's ~~R~~regulation minimum plus its assigned ~~regulation~~ Regulation forms the lower limit of the new dispatch range.) Exhibit 13 illustrates the limit relationship.

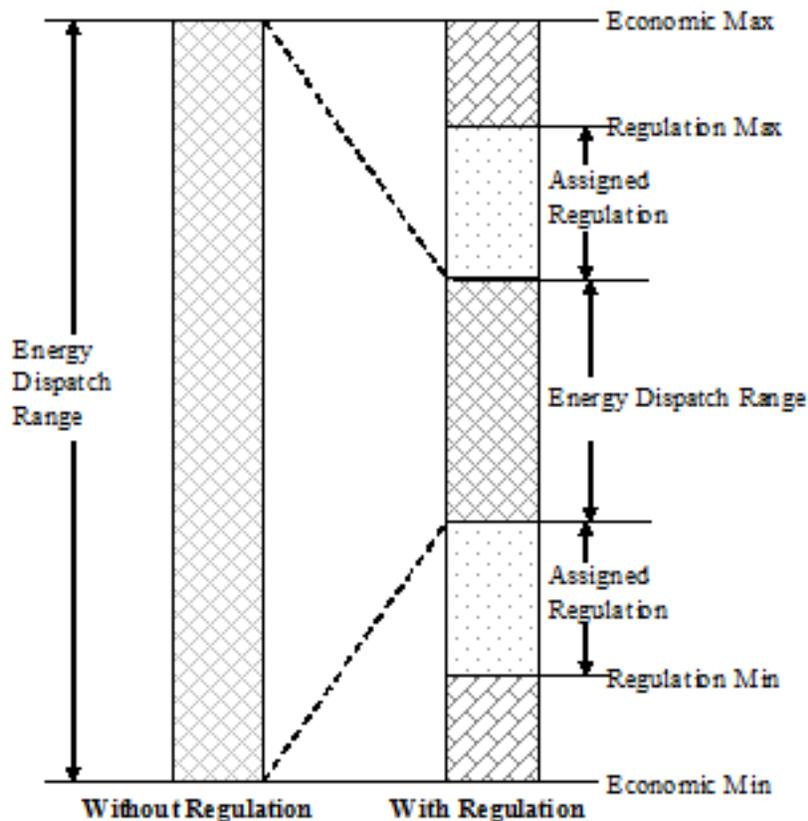


Exhibit 13: Limit Relationship for Regulation

Resource owners wishing to provide Regulation in the PJM **balancing** **Balancing Authority area** **Area** are required to submit offer data as detailed in Section 3.2 of Manual 11: **Energy & Ancillary Services Market Operations**.

4.4.2 Regulation Signals

Resource owners will receive from PJM:

- Assigned Regulation (ARegA or ARegD) – This is the assigned hourly **R**regulation quantity (MW) that is cleared from the **R**regulation market system. It is assigned for each individual resource that is qualified to regulate in the PJM market. This value, although typically static for the hour, will be sent on a **10-10**-second scan rate. Resources will receive a separate assignment for RegA and RegD if the regulating resource is dual qualified, but the regulating resource will be assigned to follow only one signal for the hour.
- Regulation Control Signals (RegA, RegD) – Real-time instantaneous resource owner fleet **R**regulation signal (+/- MW). This signal is used to move regulating resources in the owner's fleet within the fleet capability (+/- TReg). This value will be sent on a **2 two**-second scan rate.
 - o RegA-is the low filter ACE signal sent to traditional regulating resources
 - o RegD-is the high filter ACE signal sent to dynamic regulating resources

Resource owners will send to PJM:

- Total Regulation (TRegA or TRegD) – This is the real-time fleet regulation capability (MW) that represents the active resource owner’s ability to regulate. Ideally the value of this quantity should be the sum of the resource owner’s non-zero AReg quantities for the majority of the hour, but must reflect any reductions in regulating capability as they occur (resource’s AGC limit restrictions, resource “off control” conditions, etc.). This value shall be calculated every 2-two seconds and sent on a 2-two-second scan rate. A fleet owner must separate the fleet so resources following RegA report TRegA and resources following RegD report TRegD.
- Current Regulation (CRegA or CRegD) – This is the real-time fleet regulation feedback (+/- MW) that represents the active position of the fleet with respect to the +/- TReg capability. Ideally, the value of this quantity will track the RegA signal if the regulating fleet is responding as prescribed. This value shall be calculated every 2-two seconds and sent on a 2-two-second scan rate. A fleet owner must separate the fleet so resources following RegA report CRegA and resources following RegD report CRegD.
- For hydro resources that have no economic offer, these resources must submit the resource(s) midpoint.
- Demand Response resources are expected to provide PJM with a MW-value basepoint (LOADBP) in which the resource is regulating around.

Resource owners may send the following to PJM if the resource owner will be using a performance group as described in Section 4.5.7, Use of Performance Groups in the Performance Score, of this manual for evaluation:

- Resource Allocation – Individual unit allocation may be sent to evaluate resource response. Allocation should be sent as percent allocation for each individual regulating resource of the resource AReg. When the resource is not assigned it will send either a 0 %-percent. Resources without an associated allocation signal will be scored on a proportional basis.
- Operational Midpoint – the point around which the regulating resource (unit, plant or registration) operates.

If the above signals are not sent, then PJM will use proportional allocation and economic setpoint.

4.4.3 Determining Regulation Assignment

The PJM RTO’s Regulation Requirement is 525 effective MW during non-ramp hours and 800 effective MW during ramp hours. The ramp and non-ramp period will be determined seasonally, based on system conditions, and posted on [PJM.com](http://www.pjm.com) at:

<http://www.pjm.com/markets-and-operations/ancillary-services.aspx>

PJM dispatch may increase or decrease the regulation requirements as needed to accommodate system conditions. Each Load Serving Entity (LSE) is required to provide a share of the PJM Regulation Requirement. An LSE’s actual hourly Regulation obligation is determined for the hour, after-the-fact, based on the LSE’s total load in the PJM RTO, as follows:

$$\text{LSEs Regulation Obligation} = \left(\frac{\text{LSEs Load Allocation \%} \times}{\text{PJM Assigned Regulation}} \right)$$

An LSE may satisfy its Regulation obligation by any of the following methods:

- Self-Scheduled Resources — An LSE can satisfy its Regulation obligation by self-scheduling Regulation.
- Bilateral Transaction — An LSE can make contractual arrangements with other PJM Members that are able to provide Regulation service.
- PJM Regulation Market Purchases — An LSE can purchase its Regulation obligation from the PJM Regulation Market, i.e., from the excess Regulation capability provided to PJM by Resource owners.

All Regulation offers reported to PJM must provide Regulation that has a quality standard of 75% or greater, as established by verification testing.

PJM Actions

- PJM will notify the Transmission Owners and Generation Owners via the PJM ALL-CALL of changes to the regulation requirement and the expected duration of such change.

PJM Members Actions

- Each LSE determines its estimated Regulation obligation for the operating day based on its own forecast load and the information received via the PJM ALL-CALL.
- Resource owners view the hourly Regulation market results via Markets Gateway (available at least a half an hour before the operating hour) as to those resources to which Regulation has been assigned. Resource owners that have self-scheduled Regulation on any of their resources inform the PJM dispatcher when those resources are online and able to provide the self-scheduled Regulation.
- Once Regulation on a resource is self-scheduled by a resource owner, it is no longer eligible to participate as a pool-assigned regulating resource for the current operating day.
- If purchasing Regulation from another entity, the buyer and seller negotiate the transaction and the buyer submits the transaction through the Regulation Bilateral page of Markets Gateway. The seller must then confirm the transaction via Markets Gateway by 4:00 p.m. the day after the operating day. The rules for these transactions are described in more detail later in this section of the manual.

4.4.4 Dispatching Regulation

PJM obtains the most cost efficient Regulation Ancillary Service available, as needed, to meet the PJM RTO's Regulation Requirement. PJM assigns Regulation in economic order based on the total cost of each available resource to provide Regulation, including real-time opportunity cost and the resource's Regulation offer price. The AR signals are then automatically sent to the Resource Owners via Automatic Generator Control (AGC). Resource Owners are responsible for maintaining unit regulating capability. Exhibit 14 shows how the Regulation is assigned to the resources.

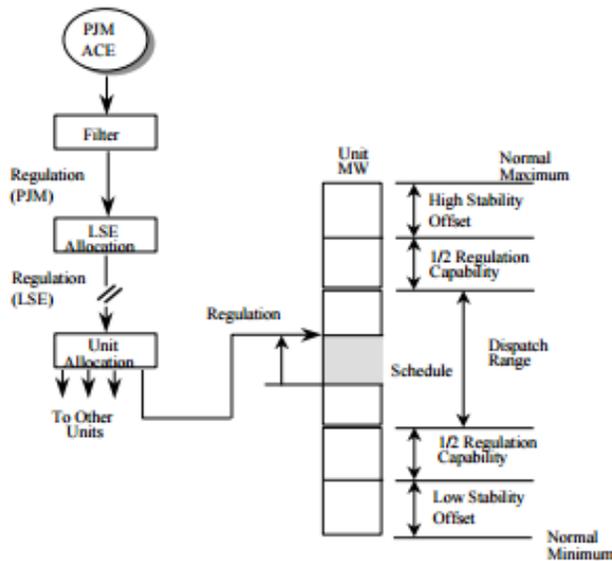


Exhibit 14: Area Regulation Assignment

The PJM dispatcher re-assigns regulating capability as necessary to meet the PJM Balancing area's Authority's Regulation Requirement. Market Sellers must comply with Regulation dispatch signals that are transmitted by PJM. Market Sellers must operate their regulating resources as close to desired output levels, as practical, consistent with Good Utility Practices.

Regulation Deficiency

After the initial Regulation assignments are made, and throughout the operating hour, PJM Members report changes to their resource's regulating capabilities either by a phone call to PJM or by virtue of the TReg signal(s) each company sends to PJM. If a resource becomes unable to supply its assigned amount of Regulation, the PJM dispatcher must de-assign deficient resources and assign replacement Regulation to ensure that the total Regulation requirement is met. Such assignments are made economically based on each available resource's total cost to provide Regulation, including real-time opportunity cost and the resource's Regulation offer price.

If, after assigning all available Regulation, the PJM Regulation Requirement is still not met, the PJM dispatcher operates the system without the required amount of Regulation, logging such events.

In the event there is a loss of EMS communication between PJM and a resource owner, Current Regulation Assignments must be reassigned to another Resource Owner until EMS communication is reestablished.

Regulation Excess

If, during the period, an excess in assigned Regulation occurs and the total PJM RTO Regulation value exceeds the objectives by 15 MW or more, the PJM dispatcher de-assigns Regulation economically based on each resource's total cost to provide Regulation, including real time opportunity cost and the resource's Regulation offer price.

PJM Actions

- PJM dispatcher continuously monitors the Regulation deviation to assess **Resource resource Owner-owner** fleet capability and reassigns Regulation as required.
- PJM's accounting staff determines the billing for the regulating service, according to the procedures in **Manual 28: the PJM Manual for Operating Agreement Accounting (Manual 28)**.

PJM Member Actions

- When initial assignments and reassignments are made, each affected **Resource resource Owner-owner** dispatcher then updates the entity's regulating capability as defined by the **Resource resource Owner-owner** TReg value.
- Participants report to the PJM dispatcher changes (of at least +/- 1 MW for duration greater than 15 minutes) to assigned Regulation capability.

Bilateral Transactions

One PJM Member may sell Regulation **Ancillary Service** to another PJM Member. The two members participating in the Bilateral Transactions must operate in accordance with PJM Manual 11, Section 3.2.3, **Regulation Bilateral Transactions**.

4.5 Qualifying Regulating Resources

In order to ensure the quality of Regulation supplied to control the PJM RTO, a quality standard is developed. A resource must meet the quality standard to be permitted to regulate.

In general, there are two phases to qualifying a regulating resource:

- Certifying the resource
- Verifying regulating capability

An Area Regulation (AR) test is used for both certifying and verifying regulating capability for a resource.

Note:

It must be emphasized that the Regulation test is not intended to test a resource's governor response to power system frequency changes.

PJM Actions

- PJM's **Performance Operations Analysis & Compliance Department** will evaluate test results against the PJM RTO Regulation **mMarket oObligations** as described in Section 4.4.1 & score the test using the performance score calculation as described in Section **4.5.6. Performance Score Calculation** of this manual within three business days of the test.
- PJM's **Performance Operations Analysis & Compliance Department** will send results of test to the resource owner within three business days.
- PJM maintains a historical database of individual resource Regulation test results and calculates all appropriate compliance information. Individual test results are provided via

email to the participant within three business days to facilitate a review and validation of results at the participant level.

- PJM Dispatcher dispatcher determines if a self-scheduled test or PJM-PJM-administered test can be performed based on system conditions.

4.5.1 Regulation Qualification Test Traditional Resource Test

The AR test is run during a continuous 40-minute period when, in the judgment of the PJM test administrator, economic or other conditions do not otherwise change the base loading of the resources that are being tested. All resources performing a regulation Regulation test must set and hold for the test duration the MW-value base point that the resource is regulating around. Changes in base loading for a resource during the test period invalidates the test for that resource. A separate set of tests are required for qualification for the traditional signal (RegA) and the dynamic signal (RegD). The AR test follows a simulated Rregulation signal. The test and will last for 40 minutes.

Once an AR test is announced, a Resource Owner resource owner is not permitted to change any resource's Regulation assignment.

Following the testing period, an initial evaluation will be performed to ensure all underlying regulation Regulation obligations and testing requirements have been met. This will include verifying the resource (1) was providing Rregulation for the duration (40 minutes) of the test, (2) can achieve its full regulation Regulation testing range (+/- TREG), (3) has held its regulation Regulation base loading for the full duration of the test and (4) that no other resources within the testing fleet were in the Rregulation market during the testing period.

Scoring the AR test is based on compliance to the Performance performance Score score Calculation calculation as described in Section 4.5.6, "Performance Score Calculation," of this manual. The score is evaluated on the entire 40-40-minute test period.

Dynamic Resources

The qualification test procedures described above for resources that will follow the dynamic Rregulation signal (RegD) are the same as the qualification test for RegA. For each test, resources will follow a signal for 40 minutes and be scored using the performance score calculation. Resources must complete a separate set of tests to qualify for the traditional signal (RegA) or the dynamic signal (RegD).

Changes to the Signal Path Re-Test – New Resource Owner

For previously qualified resources that are either purchased by a new resource owner which would constitute a change in the Rregulation signal path, resource owners must conduct a single, successful re-test to verify that each unit is able to respond to the Rregulation signal under the new resource owner. This test will be PJM-PJM-administered and must meet the threshold for certification as described in Sections 4.5.2–4.5.3. During the transition, resources will not be qualified to offer Rregulation. After the re-test, the resource performance score will be set to the re-test qualification score.

Changes to the Signal Path Re-Test – Existing Resource Owner

For previously qualified resources where an existing resource owner who makes changes to the Energy Management System (EMS) or Generation Management System (GMS), or other

changes, which would constitute a change in the Regulation signal path, resource owners must conduct testing based on mutual agreement with PJM. This includes, but is not limited to, the EMS/GMS database, Inter-Control Center Communication Protocol (ICCP) servers, and Communication Front End (CFE) replacements and/or upgrades. After system verification, the resources' historic performance score will be maintained. This test must be administered by PJM.

PJM Actions

- PJM's Performance Operations Analysis & Compliance Department will certify a resource after three consecutive successful tests of 75% percent or better. After this requirement has been met, the change will be made to enable regulation Regulation offers to reflect the new certification within 1 one business day.

PJM Member Actions

- Contact PJM's Performance Operations Analysis & Compliance Department at least a day prior to testing stating a regulation test will occur and include the following information: the resource name and identification number, the time of the test, the amount of MWs being tested, base point, and what signal type the resource will test on.
- Contact the PJM Dispatch dispatcher at least 60 minutes in advance of a PJM PJM-administered test for test scheduling and approval. Contact PJM's Performance Operations Analysis & Compliance Department at least 24 hours before the start of the test to ensure that the test can be scored by the Performance Score Calculation Engine (PSCE).
- For a new resource owner, schedules a re-test by contacting RegulationTesting@pjm.com for each unit in a manner similar to the guidelines above when a new owner takes control of an already qualified regulation resource.
- For an existing resource owner, schedules system verification by contacting RegulationTesting@pjm.com based on mutual agreement with PJM Staff staff when an existing resource owner changes the control signal path (e.g., EMS or GMS is changed or upgraded).

4.5.2 Certifying Regulating Resource

A resource may be certified only after it achieves three consecutive scores of 75% percent or above. Resources providing dispatchable energy and Regulation service needs to provide testing at the low economic and high economic Regulation limits.

The first of these tests may be performed internally by the member Member, following the PJM Regulation test Test procedure Procedure. To perform a self-test, the member Member must use the PJM test shape posted on the Markets and Operations > Ancillary Services > Market Based Regulation page, fed into the resource owner's EMS. Additionally, the member Member must notify the PJM Performance Operations Analysis & Compliance Department at least 24 hours before the test. The Resource resource owner should also notify PJM Dispatch, who will make a determination as to whether the test can be run. The resource should be set to unavailable during the test, though the other units may continue to regulate. Up to three self-administered tests may be performed on a resource each day.

The remaining tests should be administered by PJM Dispatch. The resource owner should contact PJM Dispatch and PJM Performance Operations Analysis & Compliance at least 24

hours before the test. For a PJM-administered test, all resource(s) will be taken out of the R-regulation market for the specific signal. The PJM Dispatcher dispatcher makes the final determination about whether a PJM-administered test can be performed. Only one PJM-administered test may be performed on a resource each day.

PJM Actions

- PJM Performance Operations Analysis & Compliance will certify a resource after three consecutive successful tests of 75% percent or better. After this requirement has been met, the change will be made to enable regulation Regulation offers to reflect the new certification within 1-one business day.

PJM Member Actions

- Before a self-administered test, resource owner notifies PJM Performance Operations Analysis & Compliance and PJM Dispatch. Before a PJM-administered test, the resource owner notifies PJM Performance Operations Analysis & Compliance and PJM Dispatch 24 hours prior to testing.
- For any tests performed by the members Members for the purpose of certification, the member Member will supply the resource, the time of the test, the amount of MW being tested, the MW-value base point the unit will be regulating around, and the signal type the resource is following to RegulationTesting@pjm.com.
- The Resource resource owner will use the posted test shape posted on the Markets & Operations > Ancillary Services > Market Based Regulation page (<http://www.pjm.com/markets-and-operations/ancillary-services.aspx>) for a self-administered test.
- The Resource resource owner will set the resources specific operation setpoints for each resource to test around.

4.5.3 Certifying Multiple Combustion Turbines or Hydro Units at a Single Site

Combustion Turbines turbines and Hydro hydro-generators operating under a single plant control system must have a minimum of three tests of the control system. In addition, the performance of the each of the units being certified must be demonstrated in at least one of these tests. The test format must follow PJM Regulation test Test procedure Procedure. High and low-low-band requirements do not apply for CTs combustion turbines and Hydro hydro units being certified. The resource will be evaluated based on the Operational Midpoint of the grouped resources and the Resources Allocation as described in Section 4.4.2, "Regulation Signals," of this manual.

4.5.4 Increasing Regulation Capability on a Resource

One Regulation Certification Test is required for each market resource to increase the Regulating regulating Capability capability on the resource. This test must be administered by PJM. Additionally, the member must notify the PJM Performance Operations Analysis & Compliance and PJM Dispatch at least 24 hours before the test. The resource should be set to unavailable during the test, though the other units may continue to regulate.

PJM Actions

- PJM will update the R-regulation bidding availability to reflect the new certification within 1-one business day after one successful test of 75% percent or better.

PJM Member Actions

- The resource owner notifies PJM Performance Operations Analysis & Compliance and PJM Dispatch before a PJM-administered test.
- For any tests performed by the members for the purpose of increasing certification, the member will supply the resource, the time of the test, amount of MW being tested, the MW-value basepoint the unit will be regulating around, and the signal type the resource is following to RegulationTesting@pjm.com.
- Resource owner will set the resources specific operation setpoints for each resource to test around.

4.5.5 Disqualification and Re-Qualification of a Regulation Resource

Regulating resources that have not met performance thresholds over a specified time period will be disqualified and must re-qualify to offer into the regulating market for applicable signal type (RegA or RegD). The disqualification threshold is based on the historic performance score. The historic performance score is a rolling average actual hourly performance score for the last 100 hours a resource has operated or a weighted average of the average of the three initial or requalification scores that are then averaged with available actual hourly performance scores. The hourly performance score calculation is described in [Section 4.5.6](#), "Performance Score Calculation," of this manual.

When the historical performance score falls below 40% percent by signal type, PJM will notify the resource owner and the resource will no longer be eligible to offer into the regulation market for the applicable signal type.

The resource owner may schedule a re-test as soon as practicable. When a regulating resource re-tests, it will follow the testing procedure described in Sections 4.5.1-4.5.3 of this manual. Upon successful completion of requalification, the regulating resource performance score starts a new rolling average without any hours from the previous period counting towards the current period's rolling average.

When a regulating resource has no historic performance available, either because it is a new resource or a resource that has re-qualified, the average of the qualification test scores will be used as proxy for the historical performance rolling average as follows:

$$Hour = \frac{X * Qualification Performance Score + Y * Actual Performance Score}{100}$$

Where $100 - X = Y$ and Y is the number of hours after qualification. After 100 hours of actual performance scores $X \rightarrow 0$.

PJM Actions

- Tracks rolling average of a regulating resource's performance score by signal type
- Alerts the regulating resource's owner when performance by signal type falls below threshold of 40% percent
- Blocks the disqualified resource from offering into the market
- Monitors re-testing of the regulating resource
- Re-qualifies regulating resource

- Notifies LSEs of a resource’s certification for Regulation within three business days.

PJM Member Actions

- Schedules re-test to re-qualify as regulating resource status, if desired, while adhering to regulation testing guidelines.

4.5.6 Performance Score Calculation

PJM will calculate an hourly performance score which that reflects a Rregulation resource’s accuracy in increasing or decreasing its output to provide frequency Rregulation service in response to PJM’s dispatch signal. With the Performance Score Calculation Engine (PSCE), PJM will collect Rregulation signal data every 10 seconds and resource operating parameters that will be inputs into the performance score. The performance score calculation (PSC) evaluates each resource’s accuracy in following the AGC signal.

PSCE Assumptions

Unless a resource owner elects to send additional data to detail operational decisions, it is assumed that resources are allocating the regulation control signal(s) proportionally and operating around the PJM Individual Generator Dispatch (IGD) setpoint. If a resource elects to use something other than proportional dispatch, the resource must send Operation Midpoint and Resource Allocation described in Section 4.4.2, “Regulation Signals,” of this manual.

Delay and Correlation Score

For each 10-10-second interval starting from Time 0 +10, PJM will calculate a Delay Score to quantify the delay in response between the regulation signal (RegA) and the resource change in output. To calculate the match, use the statistical correlation function (r), which measures the degree of relationship between the two signals. By shifting the time periods to compare the signals, delay (δ) is defined at the point in time of the maximum correlation between the two signals. This generates both a Correlation and Delay Score as:

$$\text{Correlation Score}_{\delta=0 \text{ to } 5 \text{ Min}} = r_{\text{Signal, Response}(\delta, \delta+5\text{Min})}$$

$$\text{Delay Score} = \text{Abs} \left| \frac{\delta - 5 \text{ Minutes}}{5 \text{ Minutes}} \right|$$

Where the Delay score Score allows a 10-10-second latency for signal propagation delay for regulating resources.

Correlation and Delay are determined together by finding the 10-10-second interval with the highest coincident Correlation and Delay score. The 10-10-second interval that will determine Correlation and Delay for each scoring period is:

$$\max_{\delta=0 \text{ to } 5 \text{ Min}} (\text{Delay Score} + \text{Correlation Score})$$

Correlation during During Periods of Zero Slope

If the standard deviation of the regulation signal is less than a threshold value, then the Correlation shall be calculated as the 1 absolute difference between the slope of the regulation signal and the slope of the response. The performance score for Correlation and Delay will be calculated by using linear regression to find the slopes of the regulation signal and the resource response.

Precision Score

For each 10 second interval starting from Time 0 +10, PJM will calculate a Precision Score as a function of the difference in the energy provided versus the energy requested by the regulation signal while scaling for the number of samples. For each 10 second sample averaged over an hourly basis, PJM calculates the Precision Score as the absolute error (ϵ) as a function of the resource's regulation capacity, as:

$$Error = Avg \text{ of } Abs \left| \frac{Response - Regulation \text{ Signal}}{Hourly \text{ Average } Regulation \text{ Signal}} \right|$$

$$Precision \text{ Score} = 1 - \frac{1}{n} \sum Abs(Error)$$

Where n is the number of samples in the hour and the precision allows a 10 second latency for signal propagation delay for regulating resources.

Performance Score Calculation

For each 10 second set of calculations the performance score will be averaged over a five minute period for PJM will determine a composite Performance Score per resource as a unit-less scalar ranging from 0 to 1. The Performance Score will be a weighted average of the performance score components, as:

$$Performance \text{ Score}(t) = \max_{i=0 \text{ to } 5min} [A * \frac{Delay(t+i)}{Score} + B * \frac{Correlation(t+i)}{Score}] + C * \frac{Precision(t)}{Score}$$

The component scalars will be weighted equally with each at one-third (1/3). For periods when assigned regulation is zero, no score will be calculated. Correlation, Delay and Precision will be calculated with all applicable samples. Null scores will not be included in the hourly average performance score.

PJM Actions

- PJM will calculate the **Performance performance Score score** for each regulating resource after the operational hour and report the score to resource owners.

PJM Member Actions

- None

4.5.7 Use of Performance Groups in the Performance Score

Resources may elect to use a performance group for performance score evaluation. Performance groups can only be created for resources that satisfy one of the following criteria:

- Resources not eligible for LOC and total to less than or equal to 10 MWs across Transmission Owner boundaries.
- A performance group can be any number of resources not eligible for LOC inside a **transmission Transmission owner's Owner's** boundary.
- Resources within a fleet with equivalent applicable offers and point of interconnection.

Resources that are part of a performance group will send the Operational Midpoints and Resource Allocation of the group TReg for the grouped resources by signal type as described in Section 4.4.2.1, "Regulation Signals." Each resource will be metered independently.

PJM Actions

- PJM will receive additional control data to be used in the ~~Performance~~ ~~performance~~ ~~Score~~ ~~score~~ ~~Calculation~~ ~~calculation~~ to be reflected resource owner's dispatch.

PJM Member Actions

- Resource owners will notify PJM via RegulationTesting@pjm.com that they satisfy one of the ~~P~~performance ~~G~~group criteria.
- Resource owners will add required information to their data transfer link to PJM.

4.5.8 Performance Scores for Regulation Resources ~~De~~during a Synchronized Reserve Event

Regulation ~~Resources~~ ~~resources~~ choosing to respond to a Synchronized Reserve ~~event~~ ~~Event~~ will receive ~~synchronized~~ ~~Synchronized~~ ~~reserve~~ ~~Reserve~~ compensation based on Manual 11, Section 4.2.11.

Resources that choose to respond to a reserve event for their reserve zone in an hour when they are cleared or assigned ~~R~~regulation are expected to return to their regulating band within 10 minutes of the end of the Synchronized Reserve ~~event~~ ~~Event~~. From the start of the event, through the event, and for the 10 minutes after the end of the event, the performance scores for all regulating resources in the reserve zone where the Synchronized Reserve Event takes place will be null.

PJM Actions

- PJM logs the time of the start and end of a Synchronized Reserve ~~event~~ ~~Event~~.
- PJM will score performance for all regulating resources as null for the period during the Synchronized Reserve ~~event~~ ~~Event~~ and 10 minutes after the end of the event for those resources in that reserve zone.

PJM Member Actions

- If the resource owner chooses to respond to an event the resource will return to the regulating band as soon as possible after the end of the reserve event.

4.5.9 Performance Scores ~~during~~ ~~During~~ ~~Periods~~ ~~with~~ ~~With~~ Insufficient Data

In rare cases of data disruption, circumstances may arise when PJM does not have sufficient data to calculate performance scores. During these disruptions, PJM will calculate performance scores for all intervals with at least ~~fifteen~~ ~~15~~ contiguous minutes of sufficient data. All intervals with performance scores, and only those intervals, will contribute equally to the hourly performance score. In the event that an operating hour does not contain ~~fifteen~~ ~~15~~ contiguous minutes of sufficient data, the historical score will be used as the hourly performance score for that operating hour.

PJM will also use the historical score as the hourly performance score for an operating hour when a partial-hour ~~R~~regulation assignment does not result in ~~fifteen~~ ~~15~~ contiguous minutes of sufficient data.

PJM Actions

- PJM uses **the** current operating day historical performance score for an operating hour where input data for performance scores calculations lasts for greater than 15 minutes.
- PJM will use operating day historical performance score when **partial** **partial**-hour **R**egulation assignment results in less than 15 minutes of data.

4.5.10 Performance Scores for Regulation Assignments **with** **With** Limited Notification

Performance **Scoring** **scoring** will begin **ten** **10** minutes after PJM Dispatch logs a resource to provide **R**egulation service. This will not impact the length of time a resource is considered to be providing regulation service for settlement calculations. For purposes of scoring under **S**ection 4.5.9, the **fifteen** **15** contiguous minutes condition will begin **ten** **10** minutes after PJM Dispatch logs a resource to provide **R**egulation service.

PJM Actions

- PJM Dispatch logs the time of the start for the **R**egulation assignment.
- PJM will score performance starting **ten** **10** minutes after **the** PJM **Dispatch** **dispatch** log indicates resource start time.

4.6 Black Start Service

Black Start **capability** **Capability** is necessary to restore the PJM transmission system following a blackout. Black Start Service shall enable PJM, in collaboration with the Transmission Owners, to designate specific generators whose location and capabilities are required to re-energize the transmission system.

These designated resources, called black start units, are generating units that are able to start without an outside electrical supply; or, the demonstrated ability of a unit with a high operating factor (subject to PJM approval) to remain operating, at reduced levels, when automatically disconnected from the grid. The planning and maintenance of adequate **black** **Black start** **Start** **capability** **Capability** for restoration of the PJM balancing area following a blackout represents a benefit to all transmission customers. All transmission customers must therefore take this service from PJM.

Black Start Service can be provided by units that participate in system restoration. Such units may be eligible for compensation under **the** Black Start Service. If a partial or system-wide blackout occurs, Black Start Service generating units can assist in the restoration of the PJM balancing area.

4.6.1 Additional PJM Requirements

The following is a summary of PJM Manuals that include information about PJM requirements for providing Black Start Service:

PJM Manual 12: Balancing Operations

- Section 4: **Providing Ancillary Services**, Black Start Service
- Attachment C: PJM Black Start Test Report Form  includes link to forms on PJM website:
 - o PJM Black Start Test Form

- o PJM Auto Load Reject Test Report Form
- o PJM Black Start Formulaic Cost Data Form
- o PJM Black Start Actual Cost Data Form

PJM Manual 10: Pre-Scheduling Operations

- Section 2: ~~Outage Reporting, Planned Outage Restrictions for Black Start Units~~ ~~Generation Outage Reporting~~

PJM Manual 1: Control Center ~~and Data Exchange~~ Requirements

- Section ~~5~~4: Meter Accuracy Standards

PJM Manual 14D: Generation Operational Requirements

- Section 10: Black Start Generation Procurement
- Attachment E: PJM Generator ~~and Synchronous Condenser~~ Reactive Capability Testing

PJM Manual 27: Open Access Transmission Tariff Accounting

- Section 7: Black Start Service Accounting

PJM Manual 36: System Restoration

- Section 6: Generation
- Section 8: System Restoration Plan Guidelines
- Attachment A: Minimum Critical Black Start Requirement

4.6.2 Restoration Assumptions

Transmission customers must purchase black start capability from PJM. Generation resources providing this service must successfully pass the requirements for ~~black Black start Start capability~~ ~~Capability~~.

PJM, in collaboration with the Transmission Owners, is responsible for identifying the generating units that are critical for PJM balancing area system restoration. During restoration activities, the Transmission Owner manages and deploys the ~~black Black start Start capability~~ ~~Capability~~, as needed, depending on the specific situation.

The Transmission Owners have developed, and shall annually review, the ~~Restoration restoration Plan~~ ~~plan~~. The annual update of the Transmission Owner's restoration plan may highlight the need for changes to the ~~Black black Start start~~ requirement. The Transmission Owner will alert PJM of these situations to allow PJM to acquire more ~~Black black Start start~~ generation, if needed, through the Black Start Incremental RFP Process documented in Manual 14D.

PJM is responsible for coordinating payments for all ~~black Black start Start capability~~ ~~Capability~~ directly to the generating facilities that provide the service. Credits and charges are determined as described in PJM Manual 27: Open Access Transmission Tariff Accounting. Cost recovery provisions for Black Start Service units are detailed in PJM Open Access Transmission Tariff (OATT) Schedule 6A, "Black Start Service."

4.6.3 Jurisdiction

Following the complete loss of system generation (blackout), it will be necessary to establish initial generation that can supply a source of electric power to other system generation and begin system restoration. These initiating generators are referred to as system black start generators. They must be able to self-start without any source of off-site electric power and maintain adequate voltage and frequency while energizing isolated transmission facilities and ~~the~~ auxiliary loads of other generators. Generators that can safely reject load down to their auxiliary load ~~or~~ an isolated island of load ~~are~~ are another form of black start generator that can aid system restoration.

4.6.4 Definitions

- **Black Start Unit** – A single generator that is able to start without an outside electrical supply ~~or~~ the demonstrated ability of a base load unit to remain operating, at reduced levels, when automatically disconnected from the grid.
- **Black Start Plant** – A plant that includes a unit that can black start. A Black Start Plant with black start units at different voltage levels (electrically separated) will be considered multiple Black Start Plants.

4.6.5 Objectives of Determining Black Start Criticality

- Provide sufficient amount and redundancy of black start resources to initiate an orderly restoration of critical transmission system components and provide cranking power to generation facilities within PJM.
- Provide sufficient off-site power to ensure restart for nuclear facilities within PJM within the acceptable time-frame.
- Provide operational flexibility to address alternate system restoration scenarios as required by facility failures and outages.

Critical black start generation is used to restore generator auxiliary load or other critical load to facilitate the system restoration process.

4.6.6 Assumptions

- Once a ~~black Black start Start unit Unit~~ is started, it can be used to facilitate ~~the~~ startup of other units (black start or not) at the same plant.
- Designated critical black start generation is identified as such in each Transmission Owner's restoration plan.
- Redundancy of critical ~~black Black start Start units Units~~ is desirable due to ~~the~~ possibility of ~~a unit's~~ failure to start or ~~the failure of a~~ transmission facility ~~failures~~ preventing ~~black Black start Start units Units~~ from serving their intended loads.

4.6.7 Minimum Critical Unit Requirements

~~The~~ PJM ~~Manual 36: System Restoration, Manual (Manual 36),~~ Attachment A: Minimum Critical Black Start Requirement ~~defines~~ the minimum critical black start by transmission zone. In general, there must be sufficient critical black start to serve critical load (plus a ~~10% percent~~ margin) and a minimum of two critical ~~black Black start Start units Units~~ for each transmission

zone that has a critical load requirement. Exceptions to this requirement will be heard on a ~~case case-by-by~~ case basis, and must be approved by PJM and seek endorsement by the PJM System Operation Subcommittee. ~~–~~ Transmission.

PJM, in its role as Transmission Operator (TOP), is responsible for selecting the ~~Black black Start start~~ resources for a system restoration plan. PJM would work closely with the Transmission Owners to identify these units based on:

- Critical ~~Load load~~ requirements
- Available ~~Black black Start start~~ resources
- Minimum number of ~~Black black Start start~~ resources allocated to a zone
- Possible ~~cross cross~~-zonal coordination opportunities

The Transmission Owner will adjust its system restoration plan based on the Black Start ~~units Units~~ allocated to it from this selection process. The Transmission Owner has the option of procuring additional ~~Black black Start start~~ resources (if not already procured by PJM), but the costs of these resources will be recovered, if necessary, outside of the ~~PJM Open Access Transmission Tariff (OATT):OATT~~.

Should there be a disagreement about the location, amount or number of ~~Black black Start start~~ resources, or disagreement between the supplying Transmission Owners, receiving Transmission Owner, or PJM about ~~cross cross~~-zonal coordination, the following process will be followed:

- The parties involved would bring the issue to the SOS-T for consultation.
- If the parties continue to disagree, the issues would be referred to the Dispute Resolution Process as detailed in Schedule 5 of the PJM Operating Agreement.
- ~~A General general~~ notification of initiation and result of Dispute Resolution process will be given to the Operating Committee.

4.6.8 Product Description

Black Start Service - A generating unit is defined as “black start capable” if the following conditions are met:

- The generating unit has the ability of being started and can close an output circuit breaker to a dead bus without energy from other PJM generating units, or, demonstrated ability to operate at reduced levels upon automatic isolation from the grid in such a way that it meets all requirements stated in the Performance Standards and Testing sections of this document.
- The generating unit owner and PJM have agreed that the unit should be designated as black start capable.
- The generating unit is located where ~~black Black start Start capability Capability~~ is determined by PJM and all affected Transmission Owners to be useful to system restoration and will be incorporated into the restoration plans of all affected Transmission Owners.
- The generating unit must have the ability to close the output breaker to a dead bus within three hours of the request from the local Transmission Owner or PJM. PJM may require some ~~Black black Start start~~ resources to adhere to less than a ~~three three (3)~~ hour start

time given critical load restoration timing requirements. These units will be notified of this timing requirement and tested to it during annual ~~Black black Start start~~ testing. PJM recognizes that ~~Black black Start start~~ resources with ~~three three-hour (3)~~ start times may not be appropriate to meet nuclear power off-site safe-shutdown load restoration requirements. PJM will allow exceptions to this three ~~(3)~~-hour start time requirement, if needed, on a ~~case case-by-by~~-case basis.

- A generating unit that is needed for system restoration and participates in black start service tests and ~~System system Restoration restoration Drills drills~~ may be eligible for compensation under ~~black Black start Start serviceService~~.

4.6.9 Generator Owner's Commitment

The generator owner shall be committed to provide ~~Bblack Sstart Ccapability~~:

- Generators shall commit initially for at least two years to provide ~~black Black start Start service Service~~ from the ~~black Black start Start service Service~~ implementation date, with an annual right to terminate by each party (the ~~Ggeneration Gowner~~ and the ~~Ttransmission Oowner~~) with one year's notice. In the event that neither the Black Start Unit owner nor the Transmission Owner exercises its right to terminate by providing a ~~one one~~-year notice of termination, the commitment to provide Black Start Service automatically will be extended for an additional year to maintain a rolling two-year commitment.
- All succeeding annual commitments must be at least an additional year to maintain a rolling two-year commitment. Changes in cost may be made annually, but will become effective in the second year of commitment.
- If, due to an event of force majeure, a generator owner cannot provide Black Start Service, the commitment requirements stated above shall not be binding.
- In the event that a Black Start Unit fails to fulfill its ~~two two~~-year rolling commitment to provide Black Start Service, the Black Start Unit owner shall forfeit the received monthly Black Start Service revenues for the period of its non-performance not to exceed revenues for a maximum of one year.
- A failure by a Black Start Unit to complete its applicable annual black start requalification test or failure of the annual test does not serve as notification of the Black Start Unit owner's intent to terminate Black Start Service, nor does it serve as notification to start the Black Start Replacement Process described in Manual 14D: Generator Operational Requirements.
- Black Start Unit ~~Owners owners~~ shall commit to supplying an update to the Black Start Service cost formula as detailed in Schedule 6A of the OATT via eDART upload process using the ~~Black black Start start Forms forms~~ in Attachment C.

For New Black Start Units entering the service:

- New Black Start Unit ~~Owners owners~~ recovering capital cost under either Capital Cost Recovery Rate in ~~PJM's Open Access Transmission Tariffthe OATT~~ Schedule 6A shall provide PJM an estimated annual revenue requirement based on the most current cost data at the time the unit enters Black Start Service.

- New Black Start Unit ~~Owners~~ ~~owners~~ will submit capital cost documentation to PJM and the IMM within ~~3~~ ~~three~~ months after entering Black Start Service. Acceptable documentation may consist of:
 - o ~~Third~~ ~~Third~~-party invoices supporting costs for contractor services and materials;
 - o Time sheets or other project tracking documentation for internal labor costs (components of labor rates) including rate sheets and applicable overheads;
 - o When applications and certificates for payment are used to confirm completion of any portion of a project, they must be signed and notarized. The signature and notarization must be visible on any copies provided.
 - o When internal costs are charged to the project, they must include documentation supporting all costs which will be included and a breakdown of how the costs were developed.
- New Black Start Unit ~~Owners~~ ~~owners~~ will submit annual revenue costs including variable black start and fuel storage costs (if applicable) to PJM and the IMM within ~~3~~ ~~three~~ months after entering Black Start Service.
 - o The annual ~~Black~~ ~~black~~ ~~Start~~ ~~start~~ revenue requirement may include annualized capital costs, ~~Black~~ ~~black~~ ~~Start~~ ~~start~~ ~~O&M~~ ~~operating and maintenance~~ costs, existing unit level annual VOM cost, and NERC ~~Standard~~ ~~standard~~ compliance costs, all of which must include complete supporting documentation.
 - o If the Black Start ~~unit~~ ~~Unit~~ can be fired on oil, additional required documentation includes support for the claimed ~~Minimum~~ ~~minimum~~ ~~Tank~~ ~~tank~~ ~~Suction~~ ~~suction~~ ~~Level~~ ~~level~~(s), size of tanks ~~and~~, fuel burn rates. If the tank is shared with other resources, a complete explanation with all supporting data of how tanks ~~s~~ use is shared and the allocation factor(s) used.

4.6.10 Performance Standards

Each ~~black~~ ~~Black~~ ~~start~~ ~~Start~~ ~~unit~~ ~~Unit~~ shall meet the following performance standards:

- The ability to self-start without any source of electric power from another PJM Capacity Resource within three (~~3~~) hours or the time defined in the Transmission Owner's system restoration plan, as demonstrated through testing; or, the demonstrated ability to operate at reduced levels when automatically disconnected from the grid.
- The ability to close into a dead (de-energized) bus. This may be demonstrated by (a) physically closing the generator breaker connected to a dead bus while the unit is running or (b) by a test that simulates closing the generator breaker while only the generator side of the breaker is energized or to a live bus.
- If the unit has the ability to operate at reduced levels when automatically disconnected from the grid, this may be demonstrated by ~~{(a)}~~ physically removing the unit from the grid while the unit is running or ~~{(b)}~~ by a test that simulates removing the unit from the grid.
- The capability to maintain frequency under varying load. This may be demonstrated by (a) picking up an isolated block of load, or (b) by appropriate dynamic off-line testing of the governor controls.

- The capability to maintain voltage under varying load. This may be demonstrated by (a) picking up an isolated load, (b) by producing both leading and lagging VARs by varying the voltage setting while the unit is synchronized to the system, or (c) by appropriate dynamic off-line testing of the voltage controls.
- Ability to maintain rated output for a the duration as identified by the Transmission Owner's system restoration plan. Requirements for supply to gas fueled Black Start Units should be considered in the Transmission Owner's system restoration plan. Specific gas supply requirements include, but are not limited to, electric feed to gas gate valves, or local gas compressors needed to maintain gas supply during the restoration process.
- In addition to these unit-specific performance standards, each black start generation Generation owner Owner must maintain procedures for the startup of black start generation at each black start generating station. These standards shall remain in effect for the duration of the commitment.

4.6.11 PJM Obligations

Generators that commit to provide Black Start Service shall not have their black start capable designation terminated within the time of their commitment. PJM shall provide at least a two-year notice to the owner or owners of generating units that are providing Black Start Service prior to terminating that unit's designation as black start capable.

Designated black start generating units shall recognize that PJM shall have the authority to ensure a minimum amount of black start capacity when deciding whether to approve generator outages. Critical Black Start Units will have additional planned outage restrictions as defined in the Section 2 of PJM Manual 10: Pre-Scheduling Operations.

4.6.12 Testing

Every generating unit that is providing black Black start Start capability Capability shall be tested to verify that it can be started and operated without being connected to the PJM power system. Black Start generating Unit owners/operators shall annually schedule tests of resources providing Black Start Capability to confirm the ability of such resources to meet the applicable standards for performance and control.

Tests may be scheduled at the discretion of the generation Generation owner Owner; however, tests must be prescheduled with PJM prior to the test. Compensation for energy output delivered to the system shall be provided for the unit's minimum run time at the higher of the unit's cost-capped offer or real-time LMP, plus start-up and no-load costs for up to two start attempts, if necessary. Any unrecovered costs of Black black Start start Tests tests should be submitted in writing to the Manager of Market Settlements.

For units with high operating rates with and the ability to remain operating at reduced levels when automatically disconnected from the grid, an opportunity cost will be provided to compensate the unit for lost revenue during the black start testing.

Annual tests shall include:

- Starting and bringing the resource to synchronous speed without assistance from a system electrical feed; or, demonstrating the ability to remain operating at reduced levels when automatically disconnected from the grid;
- Testing of all communication circuits;

- Simulating switching needed to connect the **Black Start Unit** to the transmission system following a system blackout;
- Testing the features unique to each facility that relate to Black Start Service;
- For New Units:
 - o For a generator that is a new Black Start Unit, revenue requirements must be submitted to PJM and the **MMU-IMM** through the eDART upload process. Next, the unit must successfully pass a Black Start Service test according to their plant's procedures (and restoration plan requirements); and submit the test results to PJM using the PJM Black Start Test Report Form (Attachment C). Upon successful completion of the Black Start Service test, the payment start date is the **1st first** day of the next month following the receipt of both test and cost data.
- For Units Integrating **into** **Into** PJM:
 - o For an existing Black Start Unit **which that** has recently been integrated into the PJM Region, the **Black black Start start Unit unit** owner must send revenue requirements to PJM and **0** the **MMU-IMM** through the eDART upload process at least one month prior to joining PJM. The unit must successfully pass a Black Start Service test within **6 six** months of integration; then submit the test results to PJM using the PJM Black Start Test Report Form (Attachment C). The payment start date is the **1st first** day of integration.
- For Recertifying Units:
 - o After the Black Start Unit has been decertified due to failure to complete testing requirements, the Black Start Unit will be considered a new unit for purposes of testing, and must recertify by conducting a successful Black Start Service test. PJM will reinstate the unit's payment in the next month after the successful test is performed.

4.6.13 Testing and Training Standards and Records

Each black start generating unit shall be tested to verify **that** it can be started and operated without being connected to the system. The black start generating unit owner/operator shall annually test the start-up and operation of each black start generating unit. Multiple tests may be attempted following the identification and reporting of corrective actions (**See see Section 4.6.14, the Non-performance Performance Issues section**). Testing records shall include:

- Date(s) of test(s)
- Duration of test(s) from start of test until unit is on **line**
- Test conditions (ambient temperature, general weather conditions)
- Indication of whether the unit was able to start without being connected to the system or demonstration of the ability to disconnect from the grid automatically and remain operating at reduced levels;
- Start time of Black Start **unit Unit** from beginning of start **up** until **the** unit connects to **the** dead bus;
- Indication of the ability to close a circuit breaker into a dead bus

- Indication of the ability to remain stable and control voltages while operating isolated from the transmission grid and supplying the source's own auxiliary load for a period of at least 30 minutes;
- Description of the cranking path of the unit;
- Description of startup of auxiliary equipment required for startup and operation of the next non-black start unit;
- Description of communications and control systems that are capable of allowing SCADA/EMS data and voice communications, as defined in the PJM Control Center and Data Exchange Requirements Manual;
- Explanation of failed test and corrective actions taken
- Description of operator training
- Dates of training
- Copies of black start procedures
- If the item is not tested the Generator Owner must submit an explanation on the **Black black Start start** testing form explaining why the item was not tested.

Documentation of the test results of the start-up and operation of each black start generating unit shall be provided to PJM. PJM shall verify that the number, size, and location of black start capable units are sufficient to meet PJM's restoration plan expectations.

Note:

If verification is done through simulation, the analytical analysis must be the result of dynamic studies that include the capacitive effects of cranking path circuits, unit reactive capabilities, possible steady-state and transient switching voltages, acceptable frequency, and proper modeling of large auxiliary motors required in startup.

4.6.14 Non-performance

To collect monthly black start revenues, a unit must have a successful black start test on record with PJM within the last 13 months. Once a generator is qualified, they have until the end of the 13th month following the last successful black start test date to submit documentation of the next successful annual test to PJM. Units are encouraged to adopt an annual testing cycle allowing the extra month to be reserved for retesting or scheduling conflicts.

If a unit fails a black start test, the unit is given a ~~ten~~ **10** day grace period within which it may re-test without financial penalty if within the ~~thirteen~~ **13** month testing period. If the unit does not successfully pass a black start test within the ~~ten~~ **10** day grace period immediately following notification ~~of to~~ PJM ~~of~~ a failed test, monthly black start revenues will be forfeited from the time of the first day of the month in which the unsuccessful test occurred until the first day of the first month ~~AFTER~~ **after** the unit successfully passes a black start test.

PJM Actions

- PJM **Performance Operations Analysis &** Compliance Department will collect and analyze the **Black black Start start Test test** data as described above from each black start unit to determine each unit's eligibility for Black Start Service payments. PJM

will notify the MOC or **Unit unit** owner, as applicable, within five business days of test submittal of unit's failure.

- PJM **Performance Operations Analysis & Compliance Department** will notify the LCC if a **black Black start Start unit Unit** in their zone fails to complete a successful black start test in the required timeframe. PJM **Performance Operations Analysis & Compliance** will also notify the LCC when units that failed black start tests are again eligible after completing a successful test.
- PJM **Performance Operations Analysis & Compliance Department** will maintain the list of eligible **BBlack Sstart Uunits** and forward any changes to PJM Market Settlements.
- PJM **Market Monitoring Unit IMM** will analyze any requested generator black start cost changes on an annual basis and forward all approved revenue requirements to PJM Market Settlements. The approved revenue requirements will be applied by PJM Market Settlements to Black Start Service payments starting with the month following the submission of the black start cost changes.

PJM Member Actions

- Black Start Generation Owners will notify PJM Performance Compliance **via** Blackstart@pjm.com, as well as the LCC in whose zone the **black Black start Start unit Unit** operates, of expected black start test date.
- Black Start Generation Owners will notify PJM Operations prior to start of **the** black start test.
- Black Start Generation Owners will report **Black black Start start Test test** results using the PJM Black Start Test Report Form displayed in Attachment C of this manual. Generation Owners with **Auto auto Load load Reject reject Units units** will report their testing results using the PJM Auto Load Reject Test Report Form in Attachment C of this manual. Completed forms and other requested data will be submitted to the PJM **Performance Operations Analysis & Compliance Department** using the eDART XLS Upload Process.
- Black Start Generation Owners may request changes to their Schedule 6A revenue requirements (formulaic costs) annually by completing the PJM Black Start Formulaic Cost Data Form displayed in Attachment C of this manual. Formulaic cost data requests will be reviewed and approved by the PJM **Market Monitoring Unit IMM**. Alternatively, Black Start Generation Owners may request changes to their actual costs annually by completing the PJM Black Start Actual Cost Data Form in Attachment C of this manual. Completed cost data forms and other requested data will be submitted with appropriate documentation to the PJM **Market Monitoring Unit IMM** for analysis using the eDART XLS Upload Process; however, actual cost change requests must be filed **to** with appropriate documentation to **the** FERC for approval.

4.6.15 Termination of Black Start Service

In the event a Black Start Unit intends to terminate Black Start Service, the Black Start Unit owner shall notify PJM of its intent to terminate Black Start Service using the steps described in the Black Start Replacement Process described in Manual 14D.

In accordance with the provision of PJM OATT Schedule 6A, ~~PJM OATT~~, the unit owner must give ~~one~~ one year's advance notice of intent to terminate Black Start ~~service~~ Service to allow time for the Black Start Replacement Process.

PJM Member Actions

- Follow actions for the Black Start Replacement Process as described in Manual 14D: Generation Operational Requirements.

Section 5: Transmission Facility Control

Welcome to the Transmission Facility Control section of **the PJM Manual for Balancing Operations Manual 12**. In this section you will find the following information:

- Identifies major problems and the means of correction (see **“Corrective Control Strategies”**);
- How PJM controls for reactive limits (see **“Reactive Limitation Control”**);
- How PJM controls voltage (see **“Voltage Control”**);
- How PJM responds to overloaded transmission facilities (see **“Thermal Overloaded Transmission”**);
- Description of regional reliability coordination (see **“Reliability Coordination Plan”**);

5.1 Corrective Control Strategies

Below are the major electrical network problems that can occur in the PJM RTO and the primary (or most effective) means of overcoming these problems. Exhibit 15 identifies the major problems as:

- Overloads (pre-/post contingency/reactive) and excessive transfers between areas within the PJM RTO
- **transmission-Transmission** system low voltage conditions
- **transmission-Transmission** system high voltage conditions
- **power-Power** system low frequency conditions
- **power-Power** system high frequency conditions

PJM RTO Problems					
Typical Means of Control	Overloads & Excess Transfers	Low Transmission Voltage	High Transmission Voltage	Low Frequency Conditions	High Frequency Conditions
Generator Megawatt Adjustment	Raise/Lower MW			Start Up Generators	Shut Down Generators
Phase Angle Regulator Adjustment	Increase/Decrease Phase Angle				
PJM Interchange Schedule Adjustment	Adjust Import/Export MW		Increase MW Flow Across PJM Balancing areaArea		

PJM RTO Problems					
Typical Means of Control	Overloads & Excess Transfers	Low Transmission Voltage	High Transmission Voltage	Low Frequency Conditions	High Frequency Conditions
External Interchange Schedule Adjustment	Adjust External Interchange Schedules				
Generator Reactive Power Adjustment		Increase Excitation	Decrease Excitation		
Transformer Tap Adjustment		Raise/Lower Tap Position	Raise/Lower Tap Position		
Shunt Capacitor Switching		Connect to Grid	Disconnect from From Grid		
Shunt Reactor Switching		Disconnect from From Grid	Connect to Grid		
Synchronous Condenser Adjustment		Increase Excitation	Decrease Excitation		
Transmission Line Switching	Selected Line Switching		Outage Pre- studied Studied Lines		
Circuit Breaker Switching	Change Network Topology			Change Network Topology	Change Network Topology
Pumped Storage Pump Operation	Change Pump Status	Shut Down Pumps	Start Up Pumps	Shut Down Pumps	Start Up Pumps
Pumped Storage Generator Operation	Change Generator Status	Start Up Generators	Shut Down Generators	Start Up Generators	Shut Down Generators
Customer Load Voltage Reduction	Apply As Necessary	Apply As Necessary		Apply As Necessary	
Customer Load Shedding	Apply As Necessary	Apply As Necessary		Apply As Necessary	

Exhibit 15: Corrective Control Strategies

Some of these controls are automatically applied by local closed-loop control while other controls are acted on by the individual participants upon PJM request. PJM has no direct means of controlling the generation/transmission/distribution system.

Resource re-dispatch by PJM may be done either electronically or via phone call. The RT-SCED software is used to automatically calculate economic basepoints for resources capable of following its signals. The basepoints produced by the RT-SCED application consider the impact of a specific resource on a transmission constraint such that, by following the RT-SCED basepoint, a resource can relieve a transmission constraint.

Manual dispatch is required by PJM when either a resource capable of following the RT-SCED basepoint is not doing so, or, an effective resource to relieve a transmission constraint cannot follow the RT-SCED basepoint. Manual dispatch is typically only used after economic dispatch is completely exhausted. PJM performs manual dispatch for a transmission constraint using the following steps:

- The PJM Operator identifies the constraint for which further action is required to control a potential or actual overload.
- The PJM Operator identifies the amount of relief currently needed on the constraint and considers the amount of future relief needed depending on changes in load, interchange, generation patterns, outages, etc.
- The PJM Operator validates that all economic resources available have been exhausted.
- The PJM Operator runs a distribution factor report using the PJM EMS to determine the resources that are effective to resolve a potential or actual overload.
- The PJM Operator selects a set of resources that are most effective to relieve the transmission constraint and, based on the amount of relief needed and the dfax, determines the amount of curtailment required by each resource.
- The PJM Operator contacts each resource operator and communicates the amount of curtailment required.
- The PJM Operator determines the MW impact in MW that regulating resources have on the transmission constraint and may manually de-assign Rregulation from resources that adversely impact the control of the constraint.
- The PJM Operator re-assesses manual curtailments periodically and communicates adjustments or the removal of such restrictions as necessary.

Exhibit 16 shows the type of limits that apply to various power system conditions. Nuclear power plants at various locations may have more restrictive voltage limits, imposed by nuclear licensing obligations. In these cases, such limits are to supersede the general guidance provided in Exhibit 16, which details the PJM baseline values; any Any exceptions can be found in PJM Manual 03, Transmission Operations, sSection 3.3.2.

Note:

Thermal and reactive constraint control includes loading of economic generation (on cost) generation.

Power System Conditions		
Types of Limits	Pre-Contingency Normal Conditions	Post-Contingency Emergency Conditions
Thermal	Actual Flow < Normal Rating	Contingency Flow < Emergency Rating
Reactive Transfer	Equivalent MW Rating	Equivalent MW Rating
Voltage 765 kV	726.8 kV – 803.2 kV	726.8 kV – 803.2 kV Max 8% 10% kV Drop
Voltage 500 kV	500 kV – 550 kV	500 kV – 550 kV; Max 5% kV Drop
Voltage 345 kV	328 kV – 362 kV	328 kV – 362 kV
Voltage 230 kV	219 kV – 242 kV	219 kV – 242 kV
Voltage 138 kV	131 kV – 145 kV	131 kV – 145 kV
Voltage 115 kV	109 kV – 121 kV	109 kV – 121 kV
Voltage Customer ANSI Standard	97.5% – 105%	95% – 105.8%
Stability Steady State	Max 60° Difference for 500 kV System	Max 50° Difference for 500 kV System
Stability Steady State	Max 40° Difference for Generators	Max 30° Difference for Generators

Exhibit 16: Power System Limits

The next subsections describe the procedures that are followed to implement controls in response to specific problems.

5.2 Reactive Limitation Control

This section provides operating guidelines for normal and emergency control of transfer interfaces where a reactive limit is reached or exceeded.

PJM Actions

- When a reactive limit is approached or exceeded, and non-cost moves are ineffective, out-of-merit assignments are made in the most effective areas to control these limitations. The PJM dispatcher also evaluates the impact of the existing inter-area transfers and modifies the transaction schedules that adversely affect the reactive transfer limit. Prior to out-of-merit assignments, transaction schedules that are not willing to pay congestion are curtailed. If insufficient generation is available to control these limitations, the Emergency emergency procedures contained in the PJM Manual 13, for Emergency Operations, are implemented.

If the Emergency emergency Procedure procedure steps (from curtailing non-firm contracts through Voluntary voluntary Customer customer Load load Curtailment, including implementation of the NERC TLR procedure) are insufficient to control the transfers, a Manual Load Dump Warning is issued to all Generation Owners/Transmission Owners stating the most serious limitation and the estimated amount of load relief required. The PJM dispatcher, using all available tools, voltage drop curves, actual voltage conditions, proximity to all the different reactive transfer limits, and Transmission Owner impacts, determines the most effective area for load dumping. The PJM dispatcher discusses the locations and the amount of load drop required with the affected LSEs Load Sserving Entities.

- If transfers exceed a reactive transfer limit, and voltage conditions are deteriorating and the PJM dispatcher determines that the system cannot withstand the occurrence of the contingency, the PJM dispatcher orders a Manual Load Dump in the most effective area and in an amount sufficient to return the transfers to within the reactive transfer limit.

If transfers exceed the transfer limit (or a revised transfer limit, if applicable), due to the occurrence of some contingency, but additional actions other than load dumping are available and effective, these actions are first undertaken. If, however, transfers are not returned to within the limits within 30 minutes of the occurrence of the contingency, the PJM Emergency Procedures up to and including load dumping are implemented.

PJM Member Actions

- The Generation Owner/Transmission Owner dispatchers follow actions prescribed in the PJM Manual for Manual 13.

5.3 Voltage Control

The PJM RTO is operated so that normal voltage profiles are maintained at all load levels. Under normal system conditions, the following criteria are used:

- Each LSE Load Sserving Entity is able to supply its reactive load and losses locally at all load levels.
- The 500 kV system is operated so that all 500 kV bus voltages are maintained between 500 kV and 550 kV (494 kV and 540 kV in the Dominion area) on a pre-contingency basis. Maximum voltage capabilities on individual 500 kV buses are given in Attachment B.
- The 345 kV and below portion of the bulk power transmission system is operated so that all bus voltages are maintained within 5% percent of the nominal voltage on a pre-contingency basis, unless use of a different bandwidth is required because of equipment design.

No single contingency outage shall exceed either of the following limits at a 500 kV bus:

- A post-contingency voltage drop of five 5 percent (0.20 PU in the Dominion area) on 500 kV facilities.

- A post-contingency angular difference which is **ten-10** degrees less than the setting of the synchro-check relay. Synchro-check relays are set to 60° for 500 kV terminals and 40° for generators.

PJM regularly examines system conditions for potential voltage problems and advises **the** PJM dispatcher of measures that must be taken to maintain the system within the criteria.

The Generation Owner/Transmission Owner dispatchers establish system voltage control by using controllable reactive sources and load tap changers, including generators, synchronous condensers, and switched capacitors. After the controllable reactive sources are utilized, Load Tap Changing (LTC) transformers may be used to adjust 500 kV and 230 kV voltages.

5.3.1 Action in a Low-Voltage Situation

If voltages are, or are expected to be, below the criteria, the following actions are taken by PJM and the Generation Owners/Transmission Owners.

PJM Actions

- **The** PJM dispatcher requests all Generation Owners/Transmission Owners to implement the heavy-load voltage schedule.
- **The** PJM dispatcher requests that synchronous condensers and switchable capacitors be placed in service unless studies indicate otherwise.
- **The** PJM dispatcher verifies that all units in operation are supplying maximum MVAR capability.
- **The** PJM dispatcher adjusts 500/230 kV transformer taps to optimize system voltage.
- If system voltages are determined to be overly sensitive to slight increases in transfer levels, **the** PJM dispatcher reduces power transfers into the reactive-deficient area to a value that stabilizes voltages. **The** PJM dispatcher re-examines system conditions and reduces the limit until voltage stability is achieved.

PJM Member Actions

- The Generation Owner/Transmission Owner dispatchers respond promptly to specific requests and directions of **the** PJM dispatcher.

5.3.2 500 kV System Voltage Below 500 kV

If the 500 kV system voltage is below 500 kV (or 494 kV in the Dominion area), the following actions are taken:

PJM Actions

- **The** PJM dispatcher issues a Manual Load Dump Warning and takes appropriate **Emergency-emergency** procedures (see PJM Manual for <http://www.pjm.com/~media/documents/manuals/m13.ashx> **13. Emergency Operations**), in the effective area.
- If the 500 kV system voltage has reached a level of, or is decaying toward, 470 kV, or any other level as determined by PJM operations planning staff, **the** PJM dispatcher orders sufficient load dumping in the deficient area, so as to stabilize the system voltage at 490 kV or better to protect the system from a loss of a large unit.

- **The** PJM dispatcher directs Transmission Owners, via the PJM ALL-CALL, to avoid taking any actions that adversely affect the 500 kV system voltage, without first obtaining approval from **the** PJM dispatcher. If the 345 kV system or below has reached a level of 90% **percent** of nominal and is continuing to decay, **the** PJM dispatcher orders load dumping in the deficient area, sufficient to return the system voltages to 95% **percent** or better.

PJM Member Actions

- The Transmission Owner dispatchers promptly dump an amount of load equal to, or in excess of, the amount requested by **the** PJM dispatcher.
- The Transmission Owner dispatchers report actions taken once implemented.

5.3.3 Action in a High-Voltage Situation

The following items apply to voltage control of the overall PJM 500 kV system. It should be noted that high voltage problems of **a** localized nature may be more effectively controlled by selective measures in the particular area.

PJM Actions

- **The** PJM dispatcher requests the Transmission Owners to disconnect all switchable capacitors.
- **The** PJM dispatcher requests system reactors be placed in service where available.
- **The** PJM dispatcher requests the Generation Owners/Transmission Owners to operate units to absorb reactive power.
- **The** PJM dispatcher requests neighboring Balancing **areas Authorities** to assist in reducing voltage.
- **The** PJM dispatcher requests the Transmission Owners to adjust 500/230 kV transformer taps to optimize system voltage.
- **The** PJM dispatcher requests the Transmission Owners to reset desired voltage on Static Var Compensators (SVCs).
- If the above is not sufficient, high-voltage problems may possibly be relieved by opening a 500 kV circuit. (Opening a circuit loaded below surge impedance loading, 850 MW, results in a net decrease in line charging). If using the EMS real-time program, **the** PJM dispatcher determines that opening the 500 kV circuit causes no overloads, **the** PJM dispatcher directs the Transmission Owner to open this line at both terminals. PJM dispatcher determines if this action has produced the desired effect; if not, PJM dispatcher directs the Transmission Owner to reclose the line. PJM operations planning staff routinely provide **the** PJM dispatcher with a list of 500 kV circuits that may be opened without degrading system reliability. PJM dispatcher may not open more than one 500 kV circuit for voltage control in an area.

PJM Member Actions

- The Generation Owner/Transmission Owner dispatchers respond promptly to specific requests and directions of **the** PJM dispatcher.

5.4 Thermal Overloaded Transmission

This section describes the actions to be taken when there is thermal overloading of a transmission facility (line or transformer) at or above the Short-Term Emergency (STE) rating. These actions provide protection of high voltage transmission from failure and damage due to overloaded conditions and preservation of system reliability.

The general procedure is to first apply effective corrective actions that can be taken at little or no cost, for example:

- Transformer tap adjustments
- Phase-angle regulator adjustments
- Capacitor/reactor switching
- Pre-studied line switching
- Curtailment of non-firm transactions not willing to pay for congestion

5.4.1 Transaction Curtailment

PJM may curtail transactions for which the transmission customer has not indicated the desire to buy through congestion. These curtailments are accomplished in an order based on:

- Distribution factor impact on the constrained facility
- Priority of transmission service
- Timestamp of the transmission service request within each priority level

If the transactions **which that** require curtailment are external to PJM, the NERC TLR procedure is invoked.

5.4.2 Generation Redispatch

In the event that further corrective actions are required, the outputs of effective generators are adjusted away (off-cost) from their normal assignments (on-cost).

The generation control cost signal that is sent from PJM to each Generation Owner is established either automatically by computer program or manually by **a** PJM dispatcher (see Exhibit 5 of this **PJM** manual).

5.4.3 Operating Mode Change Procedure

The following procedures are applied when the PJM RTO conditions require a change in on/off-cost operating modes:

- From On-Cost to Off-Cost — When generation redispatch is necessary, the PJM dispatcher notifies all Generation Owners/Transmission Owners, via the PJM ALL-CALL, that particular Control Zones will be operating off-cost.
- From Off-Cost to On-Cost — When conditions permit the affected Generation Owners/Transmission Owners **to** return to economic dispatch (on-cost), PJM dispatcher notifies all Local Control Centers, via the PJM ALL-CALL, when the affected LSEs will return to on-cost operations.

A summary of PJM Constraint Control guidelines is included as Attachment B.

PJM Actions

- When a transmission facility is loaded above the STE rating, but does not exceed the load dump rating (generally 115% **percent** of the STE rating), **the** PJM dispatcher requests adjustments to controllable equipment within a maximum of 15 minutes, to bring the loading to equal **to** or below the STE rating.
- If the facility is not reduced within 15 minutes, **the** PJM dispatcher orders a load dump to reduce the actual flow on the facility to be equal to or below the STE rating.
- When a transmission facility is loaded above the load dump rating, **the** PJM dispatcher or Transmission Owner on the receiving end of the overloaded facility, has up to a maximum of five minutes to analyze and relieve the overload. If not reduced to **equal to** or below the STE rating at the end of five minutes, **the** PJM dispatcher orders a load dump to relieve the facility.
- **The** PJM dispatcher promptly informs the Transmission Owner dispatcher of any overloads that have occurred and corrective actions being taken.

PJM Member Actions

- The Transmission Owner dispatchers promptly inform **the** PJM dispatcher of any overloads that have occurred and corrective actions being taken.
- The Transmission Owner dispatchers do not open any overloaded transmission, including inter-**Balancing balancing** area and intra-**Balancing balancing** area circuits, under disturbance conditions unless pre-studied or pre-arranged for specific contingencies.

If an overloaded transformer or cable cannot be relieved by applying the previous criteria, the LCC dispatcher can open the facility, while taking into account the system conditions and the resulting consequences, versus the consequences of having the facility fail and incur damage.

5.4.4 Generation Redispatch (Non-Market Facilities)

In the event that further corrective actions are required beyond non-cost actions, PJM will issue a Post-Contingency Local Load Relief Warning (PCLLRW).

At the request of the Transmission Owner, PJM will manually direct the redispatch of effective generation. The effective generation will be cost-capped but not permitted to set LMP since the facility is not a “Market” facility. PJM will commit effective generation in order to minimize the total **MW megawatts** committed to control the constraint.

Note:

If post-contingency flows exceed the facility’s Load Dump limit, the Transmission Owner’s option to control will no longer apply. PJM will manually direct the re-dispatch of effective generation to maintain the post-contingency flow below the Load Dump limit.

Attachment A: PJM Instantaneous Reserve Check (IRC)

IRC Definitions of Terms Calculations

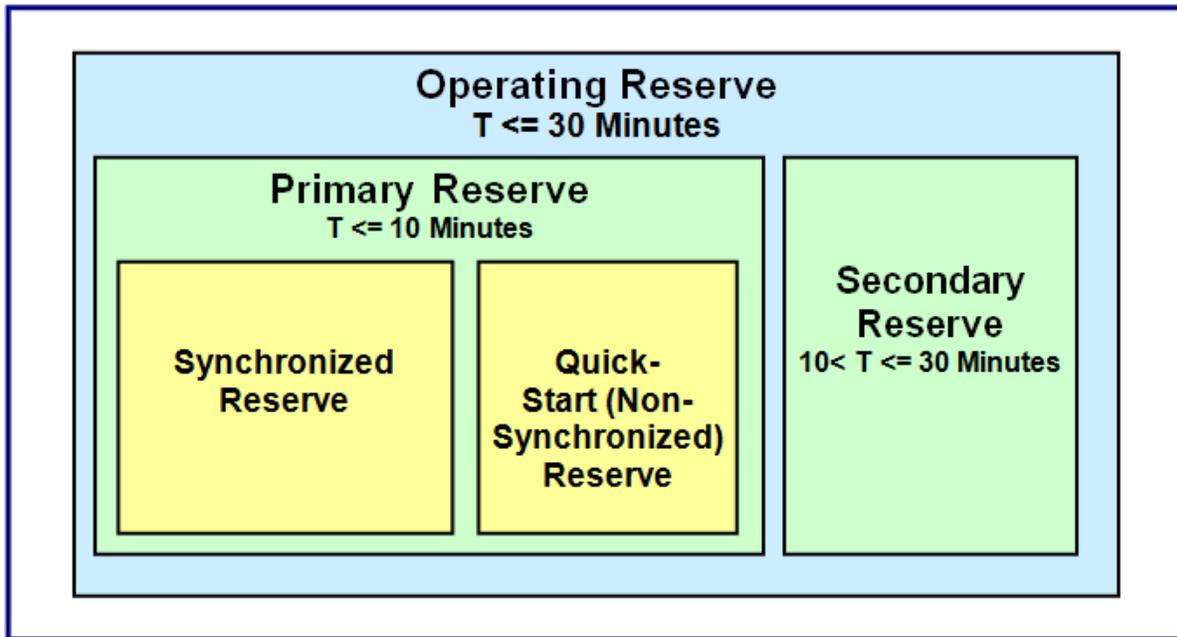


Exhibit 17: PJM Instantaneous Reserve Check Terms and Relationships

<i>Type of Reserve</i>	<i>Description/Calculation</i>
Synchronized Reserve	<p>Generation available within 10 minutes for Online Reserve Units</p> <p>1. The Synchronized Reserve is calculated as follows:</p> <ul style="list-style-type: none"> • Synchronous Reserve = the lesser of: <ul style="list-style-type: none"> (a) DGP Adjusted Spin Ramp Rate * 10 min (b) Lesser of Spin Max or Eco Max – Current MW Level
Quick- Start Reserve	<p>Non-Synchronized Generation available within 10 minutes for Offline Reserve Units</p> <ul style="list-style-type: none"> • Quick- Start Reserve) = Spin Max (if none exists then Economic Max is used) (limited by ramp rate * (10 minutes - TTS)) <p>Include: Offline Reserve Units that have a (Notification Time + TTS) ≤ 10 min</p> <p>Note: TTS = Time to Start</p>
Primary Reserve	Synchronized Reserve + Quick-Start Reserve
Operating Reserve	<p>Generation available within 30 minutes for Online or Offline Reserve Units</p> <ul style="list-style-type: none"> • Operating Reserve = Offline + Online • Offline is calculated as follows: <ul style="list-style-type: none"> ○ Offline = Spin Max (if none exists then Economic Max is used) (limited by Spin Ramp Rate * (30 minutes - TTS)) ○ Include: Offline Reserve Units that have a (Notification Time + TTS) ≤ 30 min. (limited by Spin Ramp Rate * 30 minutes - TTS) • Online is calculated as follows: <ul style="list-style-type: none"> ○ Online = the lesser of: <ul style="list-style-type: none"> a) DGP Adjusted ramp rate * 30 min b) Spin Max (if none exists then Economic Max is used) – Current MW Level <p>Note: Regulating Units are permitted to be included in the operating reserve calculation.</p> <p>Note: If a Maximum Emergency Alert is issued, and Maximum Emergency is called into the capacity, Emergency Maximum should be used in place of Spin Max or Economic Maximum.</p>
Secondary Reserve	Operating Reserve - Primary Reserve

Exhibit 18: Definitions of PJM Instantaneous Reserve Check Terms

Note:
Reserve quantities must reflect current regulation assignments.

IRC Company Data

Company: Electric Company	Request Timestamp: 07/22/2015 13:24
Request ID: 3047	Date Updated: 07/22/2015 13:26
User Name:	Posted Timestamp: 08/20/2015 08:27

PJM RTO & Reserve Pool Totals				
Reserve Category	RTO	RTO Req.	MAD	MAD Req.
Operating Reserve	* 9346		3198	
PRIMARY Reserve	* 3387	2025	1366	1923
SYNCHRONIZED Reserve	* 2297	1350	927	1282
Additional Reserve Info	RTO	RTO Req.	MAD	MAD Req.
Largest Contingency		1350		1282
Adjusted Primary Reserve	* 2748		1229	
Adjusted Synchronized Reserve(ASR)	* 1724		849	

Company Totals				
Time Range	Reserve Category	PJM CZ	CE_OLD	RTO Total
0m-30m	OPERATING Reserve	* 645	0	* 645
0m-10m	PRIMARY Reserve	* 350	0	* 350
	SYNCHRONIZED Reserve	* 130	0	* 130
	Non-synchronized Reserve (Quick Start)	* 220	0	* 220
	-- NSR Hydro	190	0	190
	-- NSR Other	* 30	0	* 30
10m-30m	Secondary Reserve	* 295	0	* 295
30m-180m	Beyond Secondary	* 365	0	* 365

Notes to PJM Operator (500 char. max.)

This is a test note.

Apply Sort
Refresh
Back
Help

Note: Regulation assignments should not be included in the Synchronized Reserves unless the reserve is beyond the regulation bandwidth.
**Please see the Help button for an explanation.
All numbers on this form have been rounded for display.

IRC Company Unit Data

If you do not wish to acknowledge any unit, please uncheck the acknowledge check box prior to clicking Recalc/Submit.

1	Unit Name	ACAP	Unit Type	Zone	Eco Max	Real-Time MW	Regulating	Synchronized Reserves	Quick Start NSR	Secondary	Beyond Secondary	Acknowledge
1	GENERATOR 1	321	Steam	PJM CZ	0	296	0	4 20	0	0	0	<input checked="" type="checkbox"/>
	GENERATOR 2	378	Steam	PJM CZ	0	335	0	10	0 30	13	0	<input checked="" type="checkbox"/>
	GENERATOR 3	735	Steam	PJM CZ	0	660	0	0	0	0 40	0	<input checked="" type="checkbox"/>
	CT UNIT 1	8	CT	PJM CZ	0	0	0	0	0	0	0 50	<input checked="" type="checkbox"/>
	CT UNIT 2	14	CT	PJM CZ	0	0	0	0	0	14	0	<input checked="" type="checkbox"/>
	CT UNIT 3	56	CT	PJM CZ	0	0	0	0	0	27	0	<input checked="" type="checkbox"/>
	HYDRO UNIT 1**	10	Hydro	PJM CZ	0	0	0	0	0	0	0	<input checked="" type="checkbox"/>

Exhibit 19: Sample Completed Instantaneous Reserve Check Company Unit Data

IRC Form Data Entry Guide

1. Reserve data pre-populated from PJM Markets and EMS systems on a Unit by Unit basis.
2. The user has the option to acknowledge reserve values for all units or on a per unit basis.
3. Any changes that actually impact IRC values should be submitted via eDART or Markets Gateway, as applicable.

Attachment B: Transmission Constraint Control Guidelines

B.1 Non-Cost Measures

PJM dispatch utilizes all available non-cost measures prior to generation re-dispatch. Non-cost measures include, but are not limited to:

- Phase Angle Regulator (PAR) adjustments
- Transformer Tap Adjustments
- Mega Volt Amperes Reactive (MVAR) adjustments
- Switching Capacitors / Reactors in/out of service.
- Switching Transmission facilities in/out of service.
- Curtailing Transactions “Not-Willing-to-Pay” congestion.

Once non-cost measures are exhausted, PJM dispatch begins to re-dispatch generation. PJM will initiate re-dispatch on a cost-effective basis using the PJM Unit Dispatch System RT-SCED solution. During constrained operations, PJM Dispatch will re-dispatch all generation, including wind, in a consistent manner. PJM assumes that, because of the intermittent nature of wind, these facilities will be at ECO-Max Economic Maximum and that further upward dispatch (increase in output) is not available for constraint control. This curtailment can be achieved by pitching blades or taking individual turbines off-line. Once off-cost operations are activated, the PJM dispatcher will set a desired “threshold” for each individual constraint, which directs the RT-SCED solution to control to the threshold percentage of the appropriate facility rating. Subsequent RT-SCED cases will continue to control to this percentage, usually 95-100 percent of facility rating, until the threshold is changed or constraint closed by the PJM dispatcher.

B.2 Generation Re-dispatch

PJM, prior to initiating re-dispatch, reviews available controlling actions and the distribution factor effect on the overloaded facility. PJM also considers whether there are sufficient resources available to control transmission facilities within acceptable limits.

1. **Contingency Operations:** PJM will initiate off-cost if reasonable controlling actions are available with an impact effect generally greater than 5 percent. Once off-cost is initiated, RT-SCED tools will re-dispatch generation based on dollar-per-MW megawatt effect, considering all on-line flexible units with an impact of 1 percent or greater. PJM staff has the ability to adjust the controlling percentage on an individual constraint basis. PJM will initiate a Post Contingency Local Load Relief Warning/Action if post-contingency flows exceed designated ratings and insufficient resources are available to control the overloaded facilities.
2. **Normal/Actual Overload:** In general, PJM initiates off-cost and utilizes controlling actions greater than 5 percent impact; however, since an actual overload causes real-time loss-of-life on the affected facility, PJM will load generation with an impact effect of less than 5 percent. Once off-cost is initiated, the RT-SCED tool will re-dispatch generation based on dollar-per-MW megawatt effect, considering

all on-line flexible units with an impact of 1% percent or greater. PJM staff has the ability to adjust the controlling percentage on an individual constraint basis.

The RT-SCED software continues to monitor projected flows on constrained facilities and sends ramp-limited set points to re-optimize re-dispatch for constraint control to the designated threshold. The eligibility of units to set Locational Marginal Price is determined by comparing the desired output as calculated by RT-SCED to the actual output as calculated by the State Estimator.

Note:

1: In order to ensure resources do not force emergency procedures, they must be dispatchable (Dispatchable Generation) in the range between the greater of the resource's physical minimum operating level or Capacity Interconnection Rights (CIR) and Maximum Facility Output (MFO) (i.e., the fixed generation flag must not be selected).

2: Resources may not submit an economic Economic minimum Minimum that exceeds the greater of the resource's physical minimum operating level or the level of their Capacity Interconnection Rights (CIR) in the real-time energy market. This restriction does not apply to the day-ahead market.

3: An intermittent resource's Economic Minimum shall not exceed the level of its CIR.

4: An intermittent resource's Emergency Minimum should be set to 0.

5: During Constrained Operations, Resources resources will be re-dispatched cost-effectively based on their bid parameters.

6: The Cost cost-effective re-dispatch (\$/MW effect) objective is to minimize the function $[(\text{Current Dispatch Rate} - \text{Unit Bid}) \div \text{Unit Generation Shift Factor}]$.

7: The unit default cost/price bid will be assumed to be 0 unless provided via Markets Gateway.

8: Intermittent resource curtailment should be achieved within 15 minutes or consistent with the resources ramp rate bid. PJM should be notified if curtailment is expected to exceed 15 minutes.

PJM Member Actions

- Generation Dispatchers dispatchers ensure their units are following PJM economic base points to Economic Minimum output.
- Wind Generator Operators will adjust Wind Turbine Control Systems or manually adjust turbine output to achieve the desired RT-SCED basepoint.

B.3 Analyzing and Controlling ~~nonNon-market~~ ~~Market~~ BES facilities

Background:

PJM is responsible for monitoring ~~for Bulk Electric System (BES)~~ facilities, defined as:

- All 100 kV and above non-radial transmission lines;
- All non-radial transformers with a ~~high-high~~-side voltage of 100 kV and above;
- Individual generation resources larger than 20 MVA or a generation plant with aggregate capacity greater than 75 MVA that is connected via a step-up transformer(s) to facilities operated at voltages of 100 kV or higher;
- Lines operated at voltages of 100 kV or higher;
- Transformers (other than generator step-up) with both primary and secondary windings of 100 kV or higher; and
- Associated auxiliary and protection and control system equipment that could automatically trip a BES facility, independent of the protection and control equipment's voltage level.

A portion of the BES facilities are considered non-market BES facilities and will be controlled in a manner different than market BES facilities. **Controlling actions for non-market BES facilities will be coordinated with the Transmission Owner and will not be permitted to set LMP.**

Procedure:

B.3.1 Outage Approval Process for ~~BES~~ facilities

Reliability Engineers will evaluate and approve transmission outages consistent with the PJM ~~Manual 03, Transmission Operations, Manual (M03)~~ and PJM ~~Manual 38, Operations Planning, Manual (M38)~~ ensuring reliability is maintained on all BES facilities.

B.3.2 Outage Approval Process for ~~nonNon-market~~ ~~Market~~ BES Facilities

Additional coordination may be required with the Transmission Owner (TO) for non-market BES facilities to ensure contingency results are consistent in real-time operations:

- For planned outages, the differences in contingency analysis results should be rationalized in advance and instruction provided to real-time operations as to which EMS analysis is more accurate (PJM or TO).
- An operating plan shall be agreed upon in advance, which may require the advanced scheduling of long-~~lead~~-~~lead~~-time generation at the expense of the Transmission Owner.
- The agreed upon controlling actions should be documented and communicated to PJM and TO or ~~Generation Owner (GO) Dispatchers~~ dispatchers.
- Under certain conditions, a generator may violate Generator ~~Startup~~-~~step-up~~ Transformer (GSU) limits upon the loss of another facility. A generator will be permitted to operate above their emergency limits so long as a post-contingency reduction plan has been

agreed upon. Pre-contingency reductions would be required in the absence of an ~~agreed~~ ~~agreed~~-upon plan.

B.3.3 Resolving Modeling Differences

Prior to implementing controlling actions to control flows within limit criteria, PJM ~~Dispatch~~ ~~dispatch~~ compares PJM EMS Security Analysis results with Transmission Owners' EMS Security Analysis ~~r~~Results. Pre-contingency, ~~and Postpost~~ ~~Contingency contingency~~ flows and ratings are compared. If a difference exists between PJM and Transmission Owner Security Analysis results, PJM will operate to the most conservative results until the difference can be rationalized. For planned outages, the differences should be rationalized in advance and instruction provided to real-time operations. For situations where differences were not resolved in advance, and if the difference is significant, the following guides will be followed to quickly resolve the difference:

- PJM and Transmission Owner identify modeling issue and operate to ~~the~~ most conservative solution.
- PJM investigates modeling issue and attempts to resolve within ~~1~~ ~~one~~ hour. This may involve verification of distribution factors using Seasonal PSS/E load flow case.
- If a discrepancy is ~~>~~ ~~greater than 5 percent~~% and expected to last ~~2~~ ~~two~~ hours, PJM Dispatch will contact PJM support staff and request Transmission Owner to contact support staff.
- PJM and Transmission Owner on-call support staff will work toward resolving modeling difference.
- PJM and Transmission Owner agree to defer to ~~the~~ most accurate analysis in lieu of operating to ~~the~~ most conservative results, when ~~the~~ difference is understood or resolved.
- PJM and Transmission Owner support staff attempt to correct modeling differences within 24 hours.

B.3.4 Real-time ~~Time~~ Controlling Actions

Real-time controlling actions for ~~Nonnon~~-market BES facilities are prioritized as follows:

1. Non-cost measures, including:
 - a. PAR adjustments
 - b. Transformer ~~Tap tap~~ ~~Adjustmentsadjustments~~
 - c. MVAR adjustments
 - d. Switching ~~Capacitors capacitors/~~ ~~Reactors reactors~~ in/out ~~of~~ service;
 - e. Switching ~~Transmission transmission~~ facilities in/out-of-service;
 - f. Curtailing ~~Transactions transactions~~ "Not-Willing-to-Pay" congestion
2. In order to control post-contingency voltage or thermal violations, PJM will manually direct the re~~dispatch~~ of effective generation at the request of the Transmission Owner. The effective generation will be ~~costoffer~~-capped, but not permitted to set LMP since the facility is not a "Market" facility. PJM will commit effective generation in order to minimize the total ~~MW megawatts~~ committed to control the constraint.

3. Under certain conditions, a generator may violate GSU limits upon the loss of another facility. A generator will be permitted to operate above their emergency limits so long as a post-contingency reduction plan has been agreed upon. Pre-contingency reductions are required in the absence of an ~~agreed~~ ~~agreed-upon~~ plan.
4. PJM will direct pre-contingency re-dispatch actions to:
 - a. Control for actual voltage violations below normal low limits
 - b. Control for actual thermal overloads in violation of normal ratings
 - c. Control for post-contingency voltage violations below Load Dump ~~Low~~ ~~low~~ limits
 - d. Control for post-contingency thermal overloads in violation of Load Dump limits;
 - e. Control for post-contingency violations resulting in non-converged contingencies;
5. PJM will issue a ~~n~~Non-market PCLLRW for a thermal contingency violation and provide post-contingency load ~~dfax~~ ~~distribution factors~~ if the post-contingency flow exceeds the LTE rating.
6. PJM will issue a ~~n~~Non-market PCLLRW for a voltage contingency violation and provide post-contingency load ~~dfax~~ ~~distribution factors~~ if the post-contingency voltage is below the emergency limit.

B.3.5 Maintaining System Reliability

PJM is required to ensure system reliability is maintained, ensuring there is an operating plan for all BES facilities. If PJM or a TO analysis indicates that a ~~n~~ planned facility outage would result in non-converged contingencies, post-contingency voltages below ~~LD~~ ~~Load Dump~~ voltage limits, post-contingency voltage drop violations, actual voltages below normal limits or actual flows in excess of normal ratings after all non-cost measures are exhausted, the TO will be required to schedule generation or cancel their planned outage ~~cancelled~~.

Facilities in the posted information can be designated:

- “Unmonitored” or “Not Monitored”, ~~;~~ ~~,”~~ ~~which~~ applies to facilities ~~which~~ ~~that~~ may, or may not, be modeled in the PJM EMS. No significant impact on system loading is expected to result from outages on these facilities. PJM’s EMS does not maintain ratings/limits for these facilities.
- “PJM Market,” ~~which~~ ~~indicating~~ ~~indicates~~ that the facility is internal to PJM and is under ~~C~~ongestion ~~M~~anagement. If actual or post-contingency ~~Violations~~ ~~violations~~ occur on these facilities, operators follow appropriate procedures including market re-dispatch to remediate problems. PJM’s EMS maintains ratings/limits for these facilities.
- “PJM Reliability,” ~~which~~ ~~indicating~~ ~~indicates~~ that the facility is monitored by PJM for NERC Security/Reliability Coordinator obligations. This designation is also applied when coordination is required to ensure that facilities which may not be in the PJM Market are not adversely impacted by switching or phase shifter operations on parallel PJM facilities ~~which~~ ~~that~~ are under ~~c~~ongestion ~~m~~anagement. If actual or calculated overloads occur, operators follow appropriate procedures ~~—~~ excluding market re-dispatch ~~—~~ to remediate the problem. PJM’s EMS maintains ratings/limits for these facilities.
- “PJM Status,” ~~which~~ indicates that TOs are required to report, schedule and coordinate outages on the facility. All facilities classified as 1-PJM Market and 2-PJM Reliability Coordination are automatically included as Outage Reportables. TOs are also required

to report outages on facilities that which may not be in cCongestion mManagement, but may impact the reliability and/or economics of the system. TOs are required to follow applicable outage reporting procedures for facilities classified as "Reportable High/Yes" and "Reportable Low." The primary difference in these classifications is that for Reportable High/Yes facilities, TOs are required to call before and after taking outages, whereas TOs are not required to call PJM before taking an outage on Reportable Low facilities. TOs are not required to report outages on facilities classified as Reportable No to PJM. PJM can require that any, or all, OATT facilities be Outage Reportable. PJM's EMS does not maintain ratings/limits for these facilities.

Attachment C: PJM Black Start Test Report Form

The following forms are located on the PJM Black Start Ancillary Services link on the PJM website, found under the **Markets & Operations** tab > **Ancillary Services** > **Black Start Service Test & Cost Submittal Forms**:

- PJM Black Start Test Form
- **PJM Auto Load Reject Test Report Form**
- PJM Black Start Formulaic Cost Data Form
- **Data Secure File Upload Instructions**
- **PJM Black Start Actual Cost Data Form**

Links can be found at:

Black Start Test Report Form: <http://pjm.com/~media/markets-ops/ancillary/black-start-test-report-forms.ashx>

Black Start Formulaic Cost Data Form: <http://www.pjm.com/~media/markets-ops/ancillary/black-start-cost-submittal-forms.ashx>

Attachment D: Disturbance Control Performance/Standard

The purpose of the **NERC Standard BAL-002, Disturbance Control Standard Performance (BAL-002)**, is to ensure that PJM, a Balancing Authority, is able to utilize its contingency reserve to balance resources and demand, and to return Interconnection frequency to within defined limits following a Reportable Disturbance. **NERC defines a Reportable Disturbance as any event that causes an ACE change greater than or equal to 80 percent of a Balancing Authority's or reserve sharing group's most severe contingency.** Because generator failures are far more common than significant losses of load and because contingency reserve activation does not typically apply to the loss of load, the application of Disturbance Control Standard (DCS) is limited to the loss of supply and does not apply to the loss of load.

As such, PJM is required to have access to or operate with resource reserves to respond to disturbances. This reserve may be supplied from generation, controllable load, or coordinated adjustments to interchange schedules. Further discussion of the various types of operating reserve is made in PJM Manual 10, Pre-Scheduling Operations, **Section section 3, Reserve Objectives Requirements.** As a minimum, this reserve must be sufficient to cover the most severe single contingency, and this contingency value must be re-evaluated on an annual basis to determine the most severe single contingency.

The DCS Standard requires PJM to satisfy **Disturbance disturbance Recovery recovery Criterion criterion** within a certain **Disturbance disturbance Recovery recovery Period period** for **100% percent of reportable Reportable disturbancesDisturbances.** That **Criterion criterion** requires PJM to return its Area Control Error (ACE) to zero if its ACE just prior to the Reportable Disturbance was positive or equal to zero. For negative initial ACE values just prior to the Disturbance, a return of ACE is made to its pre-Disturbance value. In either case, the **Disturbance disturbance Recovery recovery Period period** is 15 minutes after the start of a Reportable Disturbance. Subsequently, PJM must fully restore the Synchronized Reserve within 90 minutes. All contingency losses (i.e., Disturbances) **greater or equal to 80% percent of the magnitude of PJM's most severe single contingency loss** lesser of 900 MWs in the Eastern Interconnection or 80 percent of the Most Severe Single Contingency must be calculated and reported as follows.

For loss of generation:

If $ACE_A < 0$, then

$$R_i = \frac{MW_{Loss} - \max(0, ACE_A - ACE_M)}{MW_{Loss}} * 100\%$$

If $ACE_A > 0$, then

$$R_i = \frac{MW_{Loss} - \max(0, -ACE_M)}{MW_{Loss}} * 100\%$$

where:

MWLoss is the MW size of the Disturbance as measured at the beginning of the loss,

ACEA is the pre-disturbance ACE, and

ACEM is the maximum algebraic value of ACE measured within 15 minutes following the Disturbance. (Note: ACEM may be set to equal ACE15 min).

The recording of the MWLoss value should be measured at the site of the loss to the extent possible. This value should not be measured as a change in ACE since governor response (and AGC response) may introduce error.

The value for ACEA shall be based on the average ACE over the period just prior to the start of the Disturbance (10 and 60 seconds prior and including at least ~~4~~four scans of ACE).

The average percent recovery is the arithmetic average of all the calculated Ri values for Reportable Disturbances during a given quarter. Average percent recovery is similarly calculated for excludable Disturbances.

These Disturbances are reported to NERC on a quarterly basis. Additionally, it is important to note that multiple contingencies occurring within one minute or less of each other are treated as a single contingency. However, if the combined magnitude of the multiple contingencies exceeds the most severe single contingency, the loss shall be reported, but excluded from the compliance evaluation (as described above). Additional contingencies that occur after one minute of the start of a Reportable Disturbance but end prior to the end of the ~~Disturbance~~ ~~disturbance~~ ~~Recovery~~ ~~recovery~~ ~~Period~~ ~~period~~ can be excluded from evaluation as well. Instead, PJM can determine the DCS compliance of the initial Reportable Disturbance by performing a reasonable estimation of the response that would have occurred had the second and subsequent contingencies not occurred.

Attachment E: PJM ~~REPORTING~~ Reporting ~~OF~~ of NERC BAL Standard

E.1 Daily Data Support for BAL-005, BAL-006, and BAL-001 Reporting

Data Storage

The PJM data archive stores the following data to support Compliance Monitoring:

- PJM RTO ~~Area Control Error (ACE)~~ ~~Instantaneous~~ instantaneous (scan rate no less than ~~4~~ four second scan)
- PJM RTO system frequency ~~Instantaneous~~ instantaneous sampled at two second rate
- PJM RTO ~~Scheduled~~ scheduled frequency as set in the PJM EMS control system
- PJM Net Actual Interchange sampled at scan rate for ACE development
- PJM RTO Net Schedule Interchange sampled at scan rate for ACE development

PJM calculates ~~clock~~ clock-minute averages of the instantaneous data and stores the one minute averages for the following:

- ACE (one minute)
- Frequency (one minute)
- CF (compliance factor)

BAAL – ~~Daily~~ daily minute limit – high and low, minute values of BA ~~ace~~ ACE-frequency. Daily exceedance minutes by hour. Note exceedance time for an event is a progressive number of minutes only reset if a minute a BA's ACE Frequency number is within the BAAL minute limit. An exceedance can span across an hour, a day, a month, or a year. Discrete reporting periods for a day or month may not capture the total time of an exceedance.

E.2 Inadvertent Interchange Calculation

PJM calculates and records hourly ~~inadvertent~~ Inadvertent interchange ~~Interchange~~ as outlined in PJM Manual 28: Operating Agreement Accounting, ~~Section~~ section 18: Inadvertent Interchange Accounting. PJM includes all AC tie lines that connect to Adjacent Balancing Authority Areas in its Inadvertent Interchange account, including interchange served by jointly owned and dynamically scheduled generators.

E.3 PJM Frequency Bias

Frequency Bias Setting

PJM uses the method described by NERC ~~Standard~~ BAL-003-1R2, ~~Frequency Response and Frequency Bias Setting, Requirements,~~ and outlined in ~~NERC Standard~~ BAL-003-1 Attachment A, to develop the annual ~~frequency~~ Frequency bias ~~Bias setting~~ Setting.

PJM will set its Frequency Bias Setting to the greater of (in absolute value) any number between 100% ~~percent~~ and 125% ~~percent~~ of PJM's ~~Frequency~~ frequency ~~Response~~ response

~~Measure~~ ~~measure~~, calculated on FRS Form 1, or PJM's pro-rate share of the ~~Interconnection~~ ~~interconnection~~ ~~Minimum~~ ~~minimum~~ as determined by the ERO.

PJM Bias Review

Using Eastern Interconnection frequency events selected and distributed by ~~the~~ NERC, PJM reviews its Frequency Bias Setting and submits ~~it~~ to NERC by March 7 of each year and re~~calculates~~ its setting to reflect any change in the ~~Frequency~~ ~~frequency~~ ~~Response~~ ~~response~~ of the Balancing Authority Area. PJM will update the Frequency Bias Setting on April 1 of each year, or as directed by ~~the~~ NERC.

PJM ~~Performance Operations Analysis & Compliance~~ Department ~~review~~ ~~Review~~

Daily review of ACE inputs is performed by ~~Performance Operations Analysis &~~ Compliance to document any missing or invalid data quality values of ACE or frequency for final determination of CPS and ~~Balancing Authority Area Control Error Limit (BAAL)~~ reporting values.

PJM calculates, via reports, many variations of the minute data to obtain shift and daily Control Performance Standards (CPS) average values and running balances and BAAL as well as PJM corporate goals ~~on related to~~ the BAAL standards.

Monthly reporting of ~~Net net~~ schedule and ~~Net net Actual~~ ~~actual~~ by BA for ~~Onon~~ ~~Peak~~ ~~peak~~, ~~Off off~~ ~~Peak~~ ~~peak~~, and ~~Total total~~ net schedule is submitted via the NERC CERTS online Inadvertent Monitoring tool by the ~~15th~~ ~~fifteenth~~ calendar day of the following month. Monthly Inadvertent Interchange data is obtained from the PJM ~~Market~~ Settlements Department. Note that in dealing with MISO as the ~~Scheduling~~ ~~scheduling~~ agent, a net schedule between PJM ~~//~~ MISO is the only level of detail supplied on a monthly basis by waiver authority from NERC. ~~ALL~~ ~~All~~ Balancing Authorities within MISO agree with adjacent BAs on actual interchange only. The NERC CERTS tool tallies PJM ~~Onon~~ ~~Peak~~ ~~peak~~ and ~~Off off~~ ~~Peak~~ ~~peak~~ Inadvertent ~~Interchange~~, which is compared for agreement and recordkeeping purposes. The running balance is available ~~thru~~ ~~through~~ the NERC tool.

Quarterly ~~Disturbance Control Standard (DCS)~~ reporting ~~—~~ (January, April, July, and October for the previous quarter) ~~—~~ The following data is reported: number of contingencies equal to or greater than the reporting threshold and composite percent recovery to ReliabilityFirst Corporation, SERC and to ~~the~~ NERC along with the next quarter MW reporting threshold. Should there be any reportable DCS events greater than 15 minutes recovery time. All reportable events must be used to calculate average recovery factor – and then determine the next quarter's CRAF based on the formula as found on the disturbance reporting form using this formula – recovery factor a is subtracted from 200 (⁴ [200-(a)], please round to the nearest whole percentage.)

The next quarter's contingency reserve objective is then increased by the CRAF.

NERC Disturbance Control Standard Report					
Quarter:		Disturbances Not Greater than the Most Severe Single Contingency Loss	Disturbances Greater than the Most Severe Single Contingency Loss ³	This Quarter's CRAF ⁴	Criteria for Determining Reportable Disturbances This Report
Year:					
Region:					



NERC Disturbance Control Standard Report						
Balancing area/RSG ¹ :	Number	APR ² (a)	Number	APR		
		100.00	0	100.00	100.00	100.00 MW

¹ When reporting as a Reserve Sharing Group (RSG), submit data for the entire group only and list the Balancing areas co
² APR indicates the Average Percent Recovery.
³ Not a performance measure. For informational purposes only.
⁴ [200-(a)], please round to the nearest whole percentage.
*A Balancing area or Reserve Sharing Group must increase their Contingency Reserve Requirement by the CRAF. CRR c
 implemented one month after the end of a reporting quarter and remain in effect for three months.*

NERC Disturbance Control Standard Report						
Quarter:		Disturbances Not Greater than the Most Severe Single Contingency Loss	Disturbances Greater than the Most Severe Single Contingency Loss ³		This Quarter's CRAF ⁴	Criteria for Determining Reportable Disturbances This Report
Year:			Number	APR		
Region:			Number	APR		

¹ When reporting as a Reserve Sharing Group (RSG), submit data for the entire group only and list the Balancing areas co
² APR indicates the Average Percent Recovery.
³ Not a performance measure. For informational purposes only.
⁴ [200-(a)], please round to the nearest whole percentage.
*A Balancing area or Reserve Sharing Group must increase their Contingency Reserve Requirement by the CRAF. CRR c
 implemented one month after the end of a reporting quarter and remain in effect for three months.*

Attachment F: Dynamic Transfers

F.1 Background

The NERC Glossary of Terms defines a Dynamic Transfer¹ [i] as “The provision of the real-time monitoring, telemetering, computer software, hardware, communications, engineering, energy accounting (including inadvertent interchange), and administration required to electronically move all or a portion of the real energy services associated with a generator or load out of one Balancing Authority (BA) Area into another.” Dynamic Transfers includes both Dynamic Schedules and Pseudo-Ties, which are further defined below.

The NERC Glossary of Terms defines a Dynamic Interchange Schedule or Dynamic Schedule [i] as: “A time-varying energy transfer that is updated in Real-time and included in the Scheduled Net Interchange (NIS) term in the same manner as an Interchange Schedule in the affected Balancing Authorities’ control ACE equations (or alternate control processes).”

The NERC Glossary of Terms defines a Pseudo-Tie [i] as: “A time-varying energy transfer that is updated in Real-time and included in the Actual Net Interchange term (NIA) in the same manner as a Tie Line in the affected Balancing Authorities’ control ACE equations (or alternate control processes).”

The major difference between a Dynamic Schedule and a Pseudo-Tie is how they are incorporated within a Balancing Authority’s ACE calculation. A Dynamic Schedule is modeled as an “Interchange Schedule” and therefore is subject to NERC Tagging requirements [iv][v][ix]. A Pseudo-Tie, modeled as a “virtual” tie, is accounted as actual interchange and requires an adequate level of modeling within the PJM Energy Management System (EMS) and Markets Gateway. A pseudo-tied resource is considered within the Attaining Balancing Authority [i] metered boundary. In contrast, a dynamically scheduled resource continues to be within the Native Balancing Authority [i] metered boundary while providing services in the Attaining Balancing Authority.

Pseudo-ties must register with the North American Energy Standards Board (NAESB) to assist with inter-regional congestion management per NERC Standard INT-004-3.1 R3, Dynamic Transfer, and are still subject to the NERC Tagging Requirements requirements consistent with in NERC Standard INT-004-3.1 R1 [v] unless the information about the Pseudo-Tie is included in congestion management procedure(s) via an alternate method. Typically, Pseudo-ties are not tagged since they are incorporated into congestion management procedures.

¹ All capitalized terms that are not otherwise defined herein or in the NERC glossary of terms shall have the same meaning as they are defined in the PJM Open Access Transmission Tariff (Tariff), Amended and Restated Operating Agreement of PJM Interconnection, L.L.C. (Operating Agreement), the Reliability Assurance Agreement Among Load Serving Entities in the PJM Region, or the PJM Manuals.

F.2 Dynamic Transfer Request Process Flow

Purpose

This section offers additional details to the process flow pertaining to requesting a Dynamic Transfer. All process flow documentation was written based on an optimal situation and could vary per request. The information listed below is intended to provide more insight as to how Dynamic Transfer requests are processed.

Submitting Requests

All requests must be complete ~~before it will be moved~~ **to move** forward in the process. The request form can be found at the following link: [Dynamic Transfer Form](#). PJM may request any additional information essential to properly process the request. PJM will inform submitter once PJM considers the request to be complete. Please note, PJM will not consider a request complete until the submitter has formally notified the Native Balancing Authority of the request to Pseudo-Tie and provided PJM with evidence of such notification. Additionally, a request should not be made until the resource exists in the Native Balancing Authority's planning queue.

Administrative Fee

Once a Pseudo-Tie request is considered complete by PJM, the submitter will be required to execute a [System Modification Cost Reimbursement Agreement](#). Additionally, with the execution of the ~~Agreement~~ **agreement**, the submitter must provide PJM with the ~~Administration~~ **administration** ~~Fee~~ **fee** as described before the process can move forward.

Pseudo-Tie Approval Process

All generator Pseudo-Tie requests, once the ~~Administrative~~ **administrative** ~~Fee~~ **fee** is received by PJM, must go through the Pseudo-Tie Approval Process. The process consists of planning, modeling and markets eligibility tests and criteria. As each criterion is evaluated, PJM will inform the submitter of the results. All eligibility requirements must be met in order for the request to be approved. Each criterion is described in detail below.

Planning Eligibility Criteria

PJM has established a process in which the study of ~~the~~ generation seeking to pseudo-tie to PJM requires the review of the transmission planning studies, for that portion of the study conducted outside of the PJM footprint, as well as providing assistance to the entity seeking to pseudo-tie that generation in the event that the transmission planning studies are not approved as sufficient. The review of these studies conducted outside of PJM's footprint, by PJM, will allow PJM to determine if the studies performed will meet, are similar to, or exceed the requirements associated with the studies of generation seeking to connect to the PJM footprint.

The requirement to review these studies conducted outside of the PJM footprint allows PJM to determine if that generation seeking to pseudo-tie to PJM is similar in its deliverability, when comparing to the generation directly connected to the PJM footprint, as it relates to the criteria used to test the system and the extent to which the system is reinforced for the deliverability of that generation and the system surrounding that generation.

The initial study of generation inside the PJM footprint is conducted under procedures as outlined in PJM Manual 14A, [New Services Request Process](#), under the feasibility and system impact study requirements of ~~sections S~~ **sections** 2.1.6 and 2.2.2, as well as the general study procedures as outlined in Section C.7 of Attachment C; and Attachment G of PJM Manual

14B, PJM Region Transmission Planning Process. Ongoing study requirements for the study of generation in the PJM footprint must be maintained under these same standards as is conducted in the annual RTEP studies.

Any entity seeking to pseudo-tie a generation resource to PJM may consult with PJM to review the criteria to be utilized in the transmission planning studies which may be performed, by entities outside of PJM during the conduct of required transmission service studies, in order to allow PJM to provide comment as to the potential need for additional study beyond those transmission service studies. In order to allow PJM to conduct this evaluation, the entity seeking to pseudo-tie to PJM shall provide to PJM the criteria requirements used to both study the individual generation to be pseudo-tied to, as well as provide the criteria which shall be used on an on-going basis to study the system surrounding that generation. This will allow PJM to evaluate both the current process for study as well as that the process which that may be used to continue to ensure the system is reinforced appropriately.

Alternately, if the transmission service studies have already been completed, the entity seeking to pseudo-tie to PJM may provide the study reports which documented the studies performed to grant the transmission service on those systems outside of PJM. PJM will review these studies to determine if other studies are required in order to allow certification of that initial study. This review will ensure that the study criterion used meets, is similar to, or exceeds the requirements associated with the studies of generation seeking to connect to the PJM footprint. The entity seeking to pseudo-tie to PJM must also provide the criteria which shall be used on an on-going basis to study the system surrounding that generation.

If the studies conducted, or that will be conducted, to allow the external Transmission Service Providers/Balancing Authority to grant transmission service to the entity seeking to pseudo-tie to PJM, as well as the studies conducted which will to examine the system surrounding the generation on an on-going basis, meet the PJM transmission planning criteria requirements, then no additional work will be required to meet the transmission planning requirements associated with the process to pseudo-tie generation to PJM, and PJM will provide certification of this.

If the studies which that were conducted, or that will be conducted, do not meet PJM criteria, then PJM shall delineate what the deficiencies are, such that if the deficiencies are alleviated, then PJM will provide certification. If the studies which that were conducted, or that will be conducted, do not meet the PJM criteria requirements, the entity seeking to pseudo-tie generation to PJM will be required to engage a consultant to perform studies to ensure that all studies, taken together, can be assured as meeting the PJM criteria requirements. PJM will not require performance of duplicate studies in the event that additional studies are to be performed by a consultant.

The entity wishing to pseudo-tie to PJM should also understand that, beyond any initial studies to verify that the generation is deliverable to PJM under the same criteria as is used to study existing generation internal to the PJM footprint, the entity seeking to pseudo-tie generation will be required to continue to demonstrate, on an on-going basis, that studies performed on the system surrounding the generation are conducted in a manner such that the PJM transmission planning criteria continues to be used. This will again ensure that the system capabilities are being maintained to be consistent with the system capabilities associated with the generation directly connected to PJM.

In the event that any study conducted to certify the transmission planning requirements of the systems outside of PJM's footprint identifies the need for system reinforcement through

documentation of a constraint in the study, the entity seeking to pseudo-tie generation to PJM must complete upgrades as needed to eliminate any constraints identified in those studies. This will require that the entity seeking to pseudo-tie generation to PJM engages the external Transmission Service Providers/Balancing Authority to complete the required upgrades as well as demonstrate to PJM that those upgrades are completed.

PJM will allow the option to reduce the Pseudo Tie quantity to meet PJM's **Planning planning** criteria in order to avoid or reduce the amount of potential transmission upgrades. In the event that the pseudo-tied quantity is reduced due to constraints outside the PJM footprint, the customer must then also reduce the Network External Designated Transmission Service (NEDTS) held in PJM, executing a new agreement, such that the **MW megawatt** quantity for both the deliverable **megawatt MW** outside PJM and the NEDTS provide the same **megawatt MW** quantity. If the customer wishes to retain the energy delivery capability of the previously held quantity associated with the NEDTS, the customer may place a new request for service on the OASIS to retain this capability as **point-to-point (PTP)** service.

This acquisition of PTP service in place of the NEDTS service, by the customer, will allow PJM to continue to permit the customer to exercise transmission service rights, in the form of the PTP service, for the purposes of the customer's facilities' participation in the energy market, while also recognizing that the NEDTS will allow participation in the PJM capacity market.

Note that PJM's evaluation of the external Transmission Service Providers/Balancing Authority transmission service studies are not requirements associated with any entity exercising the use of that transmission service, but are requirements associated with allowing customers to participate in the PJM capacity market.

Modeling Eligibility Criteria

In order for a requested Pseudo-Tie to be approved, the particular resource must meet the following two modeling criteria: (1) Electrical Distance Test and (2) Seams Coordination Model Consistency. Each of the aforementioned criteria is described in detail below

Electrical Distance Test

PJM staff will evaluate the feasibility of upgrading the PJM Energy Management System (EMS) model to explicitly model the pseudo-tied resource by performing an electrical distance test, from the highest connected voltage at the station the unit is inter-connected, to determine the Thevenin equivalent impedance into PJM. If determined to be feasible, meaning the resulting equivalent impedance is determined to be less than or equal to .065 plus one adjacent bus, the cost of the model upgrade will be borne by the Market Participant requesting to Pseudo-Tie.

Seams Coordination Model Consistency

The EMS Models for PJM and the external Balancing Authority Areas, where the external resource impacts may be required to coordinate flowgates, need to ensure that the models align for effective operation of the requested Pseudo-Tie. This alignment is measured by calculating shift factors of coordinated flowgates and ensuring they are within **±2% percent** of each other's models. Any deviation of more than **±2% percent** will cause **the** requested Pseudo-Tie to fail the **2% Percent** Modeling Accuracy Test. PJM will make their best effort to align the models with the respective **External external Entity entity** without adding unnecessary risk to the PJM State Estimator and operational reliability.

Markets Eligibility Criteria

In order for a requested Pseudo-Tie to be approved, the particular generator must meet the following two markets criteria: (1) Market-to-Market Flowgate Test and (2) Transfer of Firm Allocation Eligibility. Each of the aforementioned criteria is described in detail below

Market-to-Market Flowgate Test

There must be at least one flexible internal PJM generator, which includes generation physically located inside of the PJM region ~~and that~~ has the capability to have an economic minimum less than the economic maximum, with at least 1.5% ~~percent~~ impact on each eligible coordinated flowgate, measured with respect to the PJM RTO load, as a result of the requested Generation Pseudo-Tie.

Test Details:

1. Identify new coordinate flowgates impacted by ~~the~~ requested Pseudo-Tie pursuant to any interregional agreements.
2. Identify flexible internal PJM Generation.
3. Perform analysis to determine the percentage of flow impact (shift factor) for a transfer of flow from the flexible internal PJM Generation with respect to the PJM RTO load on coordinated flowgates previously identified.
4. Identify which coordinated flowgates have a flexible internal PJM generator with at least $\pm 1.5\%$ ~~percent~~ impact.
5. If any flowgates do not have an internal PJM generator with at least $\pm 1.5\%$ ~~percent~~ impact, the resource fails the M2M Flowgate Eligibility Test and will not be approved for implementation.

Transfer of Firm Allocation Eligibility

Firm allocations associated with coordinated flowgates applicable to the requested Pseudo-Tie must transfer to PJM from the external entities. Firm allocations mean the requested Pseudo-Tie impacts must be eligible to be included as part of PJM's firm flows in the Day-ahead ~~Ahead~~ ~~market~~ ~~Market~~ on all coordinated facilities applicable to the requested Pseudo-Tie.

Estimate ~~&~~ ~~and~~ Deposit

Once a request has passed the Electrical Distance and Market-to-Market Flowgate requirements as described above, PJM will have 60 days to provide the submitter with an estimate of costs. The submitter will then have 60 days to review the estimate and provide PJM with notification to proceed or withdraw ~~at~~ the request. Within 10 days of a submitter indicating the intent to proceed, the submitter must provide PJM with a deposit per the executed System Modification Cost Reimbursement Agreement.

Documentation

The following documentation, if applicable, must be submitted to PJM at least 1.5 ~~–~~ 3 years prior to the beginning of the Delivery Year.

- External Resource Must Offer Agreement
- External Resource Officer Certification

- Pro Forma Dynamic Schedule Agreement
- Pro Forma Pseudo-Tie Agreement
- Must be executed prior to the Pseudo-Tie going into service
- Transmission Service Agreement
- Upgrade Construction Service Agreement for Execution

Withdrawals

PJM may withdraw a request for the reason(s) indicated below. If a request is withdrawn, PJM will provide an executed withdrawal letter to the submitter.

1. Requested resource does not pass all required eligibility criteria
2. Submitter chooses not to proceed after reviewing estimate
3. Periodically, PJM will verify the resource owner's intent regarding the requested Pseudo Tie. If PJM does not hear back within 30 days, the resource will be withdrawn. If the resource owner would like to continue, PJM will require a preferred **Production Date** from the resource owner. If PJM cannot meet the preferred **Production Date**, the first available date will be provided to the resource owner. Lastly, if the resource owner indicates the desire to terminate the Pseudo Tie Request, the resource will be withdrawn.

Note:

The information above does not supersede the PJM Tariff.

F.3 PJM EMS Modeling Requirements for Implementing Pseudo-Ties

PJM Manual 3A [x], **Energy Management System (EMS) Model Updates and Quality Assurance (QA)**, summarizes the PJM **Model** process and PJM and member obligations to create and maintain an accurate model of the electric system. An accurate model is required to analyze real-time conditions to help ensure that PJM and the neighboring transmission systems are operated safely and reliably.

PJM staff is responsible for regularly exchanging and updating models to support Joint Operating Agreements (JOAs) with neighboring systems. While external generation may not have a significant impact on PJM Transmission Facilities, their output can impact local or neighboring BA transmission facilities, which may be subject to “market-to-market” congestion management. It is for this reason that PJM is required to adequately expand our external model to support market-to-market calculations while ensuring continued State Estimator stability under normal and outage conditions.

PJM limits EMS model builds to four times per year in order to ensure a “stable” model for all stakeholders/participants. The incorporation of new Pseudo-Ties into the PJM model typically requires 12–30 months lead time depending on the location of the external resource and level of existing modeling, but can require additional lead time depending on its electrical proximity to the existing PJM RTO footprint. Please see Manual 3A, **Exhibit exhibit 5-4 [x]**, **PJM EMS Model Details** for visual representation of the existing PJM RTO footprint. In contrast, a Dynamic **schedule** may take 3–6 months lead time due to modeling not being required.

F.4 Generation Dynamic Transfer Business Rules

- All Dynamic Transfers are required to comply with applicable NERC Standards [ii][v], the PJM Tariff, the PJM Operating Agreement, PJM's Dynamic Transfer Signal requirements provided in PJM Manual 01, Control Center and Data Exchange Requirements, section 5.2.1 [vii], Tie Lines, and other applicable PJM Manuals.
- Several methods exist for the Dynamic Transfer of a unit in to or out of PJM. These methods are summarized below, illustrated in Exhibit 20 and described in more detail throughout the document:
 - o Dynamic Transfer of the entire output of the unit.
 - o Dynamic Transfer of all output above/below a threshold² value. This option is generally used to satisfy load serving obligations where unit is physically located (i.e. Native Balancing Authority and transfer remainder of the generation output to the Attaining Balancing Authority). Dynamic Transfer of output below a threshold is a method limited to Dynamic Schedules and not available for Pseudo-Ties.
 - o Dynamic Transfer of a percentage² of the unit's full output (Installed Capacity). This option is generally used to transfer a share of a jointly owned resource from the Native Balancing Authority to the Attaining Balancing Authority. In this method, a maximum of X% percent of the Full unit output is dynamically transferred into the Attaining Balancing Authority.

² Partial unit transfers require approval and additional coordination between Balancing Authorities to manage ACE impacts. This may limit the resource's ability to provide certain market services in the Attaining BA such as: ancillary services.

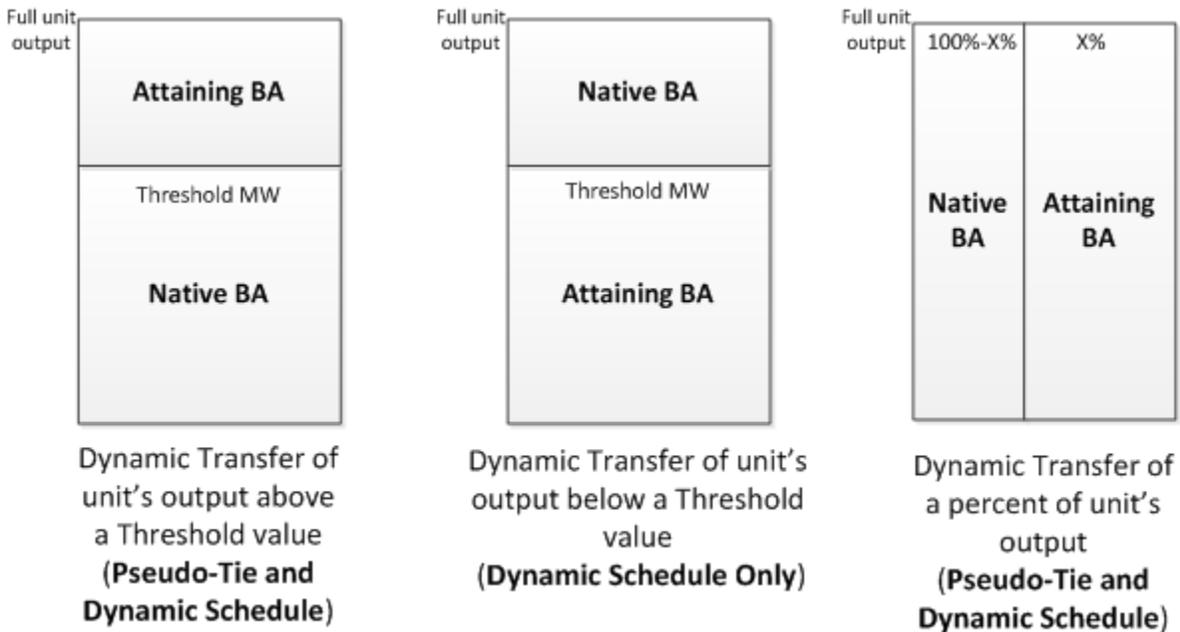


Exhibit 20: Partial ~~unit~~ Unit Dynamic Transfer ~~methods~~ Methods

- The value of the Dynamic Transfer ~~MW~~ megawatts where the entire unit's output is not transferred will be determined as follows:
 - o **Case I:** Dynamic Transfer of unit's output **above** the threshold belongs to the Attaining Balancing Authority
 - When the unit is producing a real-time ~~MW~~ megawatt output below the threshold value, all of the output remains in the Native Balancing Authority [i], and the Dynamic Transfer ~~megawatt~~ MW associated with the Attaining Balancing Authority is zero.
 - When the unit is producing a real-time ~~megawatt~~ MW output above the threshold value, then the difference between the real-time ~~megawatt~~ MW output and the threshold value is the Dynamic Transfer ~~megawatt~~ MW into the Attaining Balancing Authority.
 - o **Case II:** Dynamic Transfer of a unit's output below the threshold belongs to the Attaining Balancing Authority. This is only applicable to Dynamic Schedules and is not a viable option when implementing Pseudo-Ties.
 - When the unit is producing a real-time ~~megawatt~~ MW output below the threshold value, all real-time ~~megawatt~~ MW output remains in the Attaining Balancing Authority [i]. The Dynamic Transfer ~~megawatt~~ MW associated with the unit is its real-time ~~megawatt~~ MW output.
 - When the unit is producing a real-time ~~megawatt~~ MW output above the threshold value, then the difference between the real-time ~~megawatt~~ MW output and the

threshold value belongs to the Native Balancing Authority and the Dynamic Transfer ~~megawatt~~MW is the threshold value.

- o **Case III:** The portion of the real-time ~~megawatt~~MW output when using a percentage option belongs to the Attaining Balancing Authority.
 - When the unit is online and producing energy, ~~a~~ portion of real-time ~~megawatt~~MW output is the Dynamic Transfer ~~megawatt~~MW transferred to the Attaining Balancing Authority while ~~the~~ remainder is in the Native Balancing Authority. The Dynamic Transfer ~~megawatt~~MW cannot exceed X% ~~percent of the Full full Unit unit Output output~~ at any time.

Note:

The threshold or percentage value associated with a ~~partial~~ ~~partial~~-unit Dynamic Transfer may be used to model individual capacity of each virtual market share of a single physical generating unit's capacity.

- For Capacity Resources (i.e., units that are committed to PJM through an ~~an~~ Reliability Pricing Model (RPM) Auction or a Fixed Resource Requirement (FRR) Capacity Plan), the maximum Dynamic Transfer ~~megawatt~~MW amount established by the threshold value or percentage must be greater than or equal to the RPM/FRR committed ~~megawatt~~MW (in Installed Capacity (ICAP) terms). All Capacity Performance Resources need to be Pseudo- ~~tied~~ ~~Tied~~ by the start of relevant Delivery Year.
- All Capacity Resources must secure Firm Point-to-Point Transmission Service for the complete path from the unit to the border of the PJM Region and secure Network External Designated Transmission Service (NEDS) on PJM OASIS from the border of the PJM Region into the PJM transmission system [xv] up to their RPM/FRR commitments (in ICAP terms) and use that secured Transmission Service to transfer energy into the PJM Region. In addition, any Capacity Performance Resource must obtain long-term firm transmission service with rollover rights as required in the RAA and PJM Tariff. These resources are required to offer ~~at~~ a minimum, the committed installed capacity portion in the PJM Day- ~~ahead~~ ~~Ahead~~ Energy Market. Additionally, all Capacity Resources shall provide a letter of non-recallability assuring PJM that the energy and capacity from the unit up to their RPM/FRR commitments (in ICAP terms) is not recallable to any other Balancing Authority [xv].
- Dynamically transferred Capacity Resources and Energy Resources must notify PJM of scheduled or unscheduled outages via PJM eDART [xvi], and update unit parameters accordingly via the Markets Gateway application to reflect the ~~de~~-rates due to the outages. Dynamically transferred Capacity Resources and Energy Resources shall also submit outage information via PJM's eGADS application [xv].
- Units for which the entire output is dynamically transferred into PJM are eligible for Operating Reserve credits for start-up and no-load values when committed by PJM. Pseudo-tied resources need to follow PJM ~~Dispatch~~ ~~dispatch~~.
- For combined cycle units utilizing a threshold/percentage option, one threshold/percentage value will be utilized for the facility as a whole, as opposed to ~~using one a~~ value for the combustion turbine and another for the steam turbine. The output of all

parts of the combined cycle unit will be combined into one value in order to compare to the threshold/percentage and determine the amount dynamically transferred to PJM.

- The Market Participant will be responsible for providing telemetry [vii] to include: the total unit/plant output, the threshold or percentage value, and the calculated dynamically transferred amount to both Native and Attaining BAs. PJM and the Native/Attaining Balancing Authority will exchange these telemetered values to ensure consistent calculation of the Dynamic Transfer and ACE. PJM will alarm for differences between telemetry received by PJM and those received by the Native/Attaining BA. PJM and Native/Attaining Balancing Authority will secure unit telemetry from an alternate source to be used as a backup should the communications link from the resource become unavailable.
- For a given operating day, any change to the threshold value or percentage of a Dynamic Schedule will be communicated by the resource's market participant to both the Native Balancing Authority and Attaining Balancing Authority prior to both BA's Day-Ahead market deadlines. If both Native and Attaining BA's agree, the market participant shall coordinate the change effective 0000 hours for the entire operating day with both BAs and shall update the market bid parameters to reflect the changes. No intraday changes will be accepted.

Changes to threshold value or percentage of a Pseudo-Tie will only be permitted if sufficient Long-Term Firm Transmission Service has been obtained. If both Native and Attaining BA's agree, the market participant shall coordinate the change effective 0000 hours for the entire term of transmission service. The market participant shall update their market bid parameters to reflect the changes. Any intraday changes to the threshold value or percentage of a Pseudo-Tie for economic or emergency purposes may be facilitated by block energy scheduling via NERC tags with due coordination.

- Market participants of dynamically transferred resources must coordinate and gain Native and Attaining BA agreement on:
 - o Primary and redundant Dynamic Transfer Signal (telemetry)
 - o Additional calculations or processing required for the Dynamic Transfer Signal [ii].
 - o Coordinating the use of same value in ACE for loss of Pseudo-Tie transfer telemetry [i].
 - o Reliability Coordinator (RC) for the pseudo-tied facilities.
 - o Any ramping limitations to avoid large changes to the Native/Attaining Balancing Authority ACE.
 - o The accounting of losses resulting from the Dynamic Transfer. This may result in the resource to make arrangements for loss handling across the transfer path (impacted transmission owners) from Native BA to Attaining BA to effectively deliver the resource's RPM/FRR commitments (in ICAP terms) into PJM.
 - o Ensuring generator Dynamic Transfer MW flows are uni-directional (i.e. from the Native BA to the Attaining BA).
 - o Real-time communication mechanisms and contact points.

- If the Native BA or RC anticipates the need to operate a dynamically transferred unit to serve its load (~~Example: e.g., the~~ resource was not given a Day-Ahead award in the Attaining BA, but ~~the~~ Native BA requires the generator for local voltage support), a joint operating procedure may need to be developed.
- Requirements around generation, transmission outage coordination and system restoration shall be addressed in joint operating procedures.
- If a dynamically transferred unit is self-scheduled in the PJM Real-time ~~Time~~ Energy Market, the ~~market Market participant Participant~~ must notify ~~the~~ PJM Dispatch at least 20 minutes in advance when the instantaneous MW value of the Dynamic Transfer is to be changed. This advance notice is required so that adequate system control may be maintained.
- Should a unit from which all or a portion of the output is currently dynamically transferred in ~~to~~ or out of PJM trip off-line, the Market Participant shall notify the PJM Dispatch immediately of the value of the Dynamic Transfer at the time of the trip. Additionally, the responsible Market Participant or market operating center should immediately adjust the NERC tag(s) as applicable to reflect the energy loss. The outage shall be communicated via PJM eDART [xvi].
- Pseudo-~~tied Tied~~ resources transferring entire unit output or using the method to dynamically transfer **above** a threshold ~~mw megawatt MW~~ can be used to provide Synchronized Reserves[i] (primary reserves) only in the Attaining BA [xi] and must acquire Firm Transmission Service. Pseudo-Tied units where ~~the~~ unit's entire output is transferred into PJM can provide Non-Synchronized Reserve [xvii] if eligible.
- Pseudo-~~tied Tied~~ resources transferring ~~the~~ entire unit output or using the option to dynamically transfer **above** a threshold ~~megawatt MW~~ can be used to provide Regulation only in the Attaining Balancing Authority [xi] and must acquire Firm Transmission Service. The requirements for resources to qualify and provide Regulation service are documented in [xiii][xiv]. Further, the resources must be capable of receiving nodal economic dispatch base ~~points~~ from PJM, and the resources should make automatic regulation control signals [viii] available to PJM.
- A generating unit with pseudo-tied resources using the percentage method can provide Synchronized Reserves and Regulation Services in both Balancing Authorities only if Market Participants can provide an auditable technical solution that is agreed upon by both Bas, which ensures compliance with applicable NERC standards such as [vi][xi][xix][xx].

Absent such an agreed upon auditable technical solution, a generating unit with pseudo-tied resources using the percentage method can provide Synchronized Reserves and Regulation Service in only one Balancing Authority. An agreement for minimum term of ~~1~~ **one** year between Market Participants of the unit and both Balancing Authorities to this effect is required.

In both cases,

- Firm Transmission service is required, along with other qualifying requirements documented in [xiii][xiv].

- Market Participants are required to agree upon the method to compute telemetry signals for separately marketed shares of the unit and are responsible for the accuracy of telemetry provided to both Balancing Authorities.
- Non-Synchronized Reserve cannot be provided in either Balancing Authority.
- For a Dynamic Transfer that is tagged, the Market Participant must coordinate the implementation of the curtailment with impacted RC/BA. The Market Participant is also required to reflect the updated unit parameters in PJM systems. The Dynamic Transfer MW must be maintained at or below the reliability limit established by the TLR Transmission Loading Relief Procedure curtailment.
- Market ~~participants~~ Participants must enter ~~in~~ applicable interval Meter Values ~~to in~~ the PJM ~~Power Meter~~ Power Meter system in accordance with the established next business day submission deadline rules. These values will include either hourly or five-minute level if applicable, integrations of the Dynamic Transfer megawatt ~~MW~~ calculated in real-time, and PJM will verify them against the applicable interval values of these transfers as calculated in the PJM EMS. It is the ~~market~~ Market participant's Participant's responsibility to ensure that they cross check their data with the respective external Balancing Authority before the given day's submission deadline when making data entries into ~~Power Meter~~ Power Meter such that when PJM later performs NERC checkout of Actual or Schedule totals with the given external BA there should be no discrepancies.
- The following restrictions apply to non-capacity portion of Dynamic Transfers:
 - o In anticipation of an immediate capacity emergency in the unit's Native Balancing Authority, the Native Balancing Authority may request values of the non-capacity backed portion of Dynamic Transfers to zero. The Native Balancing Authority will request this action only when it has declared NERC Energy Emergency Alert (EEA) Level 2, indicating that a capacity emergency situation is imminent to the point that emergency procedures are foreseen or have been implemented up to, but not including, curtailments of firm load commitments. The Native Balancing Authority will provide as much notice as possible to ~~the PJM~~ Dispatch ~~dispatch~~ when this action becomes necessary, and PJM ~~Dispatch~~ dispatch will make every effort to accommodate this request as expeditiously as possible. The Market Participant must coordinate with both BAs based on pre-existing procedures.
 - o Dynamic Transfers with RPM Capacity obligations cannot be reduced by the Native Balancing Authority due to a capacity emergency in the Native BA. Instead, the Native ~~Balancing Authority~~ can request to make an emergency energy purchase after it has declared an NERC EEA Level 2.
 - o Non-capacity generating units may be dynamically scheduled into PJM utilizing either Firm or Non-Firm Transmission Service on system(s) external to PJM. However, if curtailment of a Dynamic Schedule due to the non-firm nature of the Transmission Service utilized on systems external to PJM causes real-time operational difficulties, PJM may suspend the ability for the generator to dynamically schedule into PJM until such time as Firm Transmission Service on the external system(s) is procured to minimize the probability of future curtailments.

- LMP and Base Point Requirements must be satisfied as follows:
 - o A Pseudo-Tie must receive a unit level basepoint and nodal LMP.
 - o All Dynamic Schedules will only receive interface pricing.
 - o If a self-scheduled resource using a Dynamic Schedule wishes to receive an existing external interface LMP to follow PJM dispatch, PJM shall electronically communicate the interface LMP.
 - o If PJM determines that a new interface LMP is required to support the Dynamic Schedule, PJM will work with the Market Seller to create a new interface LMP pursuant to section 2.6A of Attachment K-Appendix of the PJM Tariff and Schedule 1 of the Operating Agreement.
- If the Market Seller of a dynamically transferred unit is exporting energy from PJM at the same time any of that entity's units are dynamically transferring energy into PJM, and the energy being exported is flowing across the same PJM interface as the dynamically transferred import would flow were it not dynamically transferred, then the energy being exported (up to the amount being dynamically transferred into PJM) will be priced at the higher of the dynamically transferred unit's bus price or the interface where the energy is being purchased. Any remaining energy being exported from PJM by this Market Seller will be priced at the appropriate export interface.
- For intermittent generation, such as wind units, additional information as listed in Manual 14D [xii] shall be made available to PJM for developing a power forecast.
- Termination of Dynamic Transfers must be coordinated between Native/Attaining Balancing Authority and the Market Seller.
- An external generator that would like to offer services can exercise only one Dynamic Transfer type: Dynamic Schedule or Pseudo-Tie. Portions of a generator cannot be offered in different types.
- The minimum term of a Dynamic Transfer shall be no less than one year from the date of implementation. Pseudo-Ties shall only use long-term firm transmission service to ensure that the impacts are adequately evaluated.
- PJM will determine the feasibility of implementing a Dynamic Transfer based on the electrical proximity ([x], Exhibit 5) and the extent of detailed modeling required. Consistent with the NERC Dynamic Transfer Reference Guidelines [iii], if the reliability impact of implementing a Pseudo-Tie cannot be adequately addressed, or poses risks to the stability/quality of EMS model, PJM may require a Dynamic Schedule.
- Dynamic Transfers cannot be used to provide Reactive Services in the Attaining Balancing Authority.

Note:

The above mentioned business rules and modeling requirements are summarized in section F.5.

F.5 Dynamic Transfer Requirements Summary

Market Service	Requirement	Pseudo-Tie			Dynamic Schedule			
		Entirely	Above Threshold	Percentage	Entirely	Above Threshold	Below Threshold	Percentage
Capacity	Transmission Service	Firm Network External Designated (NEDS) >= RPM/ FRR Committed ICAP. Capacity Performance Resources require Firm Transmission service with rollover rights			Firm Network External Designated (NEDS) >= RPM/ FRR Committed ICAP			
	NERC Tagging	Not Required. Capacity Performance resources cannot be tagged.			Required			
	Letter of Non Recallability	Required						
	Product Type	All Product Types including Capacity Performance (and associated obligations)			No Capacity Performance. All Dynamic Scheduled Capacity resources have a sunset date of 06/01/2020			
	Day Ahead	Must Offer >= RPM/FRR ICAP Committed						
	Outage Reporting	eDART & eGADS Required; Update Markets Gateway parameters to reflect outage						
Energy	Transmission Service	Firm Network External Designated (NEDS)			Firm Network External Designated (NEDS) /Non-Firm			
	NERC Tagging	May be required ³			Required			
	Outage Reporting	eDART Required & eGADS Requested; Update Markets Gateway parameters to reflect outage						
	Nodal Representation-EMS, LMP	Yes			Interface Pricing Only. No nodal representation			

Market Service	Requirement	Pseudo-Tie			Dynamic Schedule			
		Entirely	Above Threshold	Percentage	Entirely	Above Threshold	Below Threshold	Percentage
	Self-Scheduled Gen (move up/down)	20 min notice						
	Start up and No Load Costs	Eligible if entire unit is transferred, called on by PJM						
Ancillary Services (Regulation, Contingency Reserves)	Transmission Service	Firm Network External Designated (NEDS)			Not Eligible			
	NERC Tagging	May be required ³						
	Outage Reporting	Notify PJM Dispatch immediately						
	Regulation Qualification & Scoring	Same as PJM internal resources. Percent Method limited to 1 BA unless agreed upon auditable technical solution is provided by Market Participants.						
	Synchronized Reserves	Eligible if meets PJM Criteria. Percent Method limited to 1 BA unless agreed upon auditable technical solution is provided by Market Participants.						
	Non-Synchronized Reserves	Eligible if meets PJM Criteria	Not Eligible					

Market Service	Requirement	Pseudo-Tie			Dynamic Schedule			
		Entirely	Above Threshold	Percentage	Entirely	Above Threshold	Below Threshold	Percentage
Day Ahead Scheduling Reserve [xiii]	Reserve Credits	Eligible						
Other Requirements	Power Meter Checkout	Required						
	Redundant Path Telemetry	Required						
	Time Frame for Implementation	12-30 Months			3-6 Months			
	Cost of Implementation	Borne by Resource Owner			None			
	Transmission Reservation Interruptions due to TLR	Notify PJM Dispatch immediately						

Exhibit 21: Dynamic Transfer Requirements Summary

F.6 References

1. Glossary of Terms Used in NERC Reliability Standards—updated April 29, 2015: (https://www.nerc.com/pa/Stand/GlossaryofTerms/Glossary_of_Terms.pdf)
2. NERC Standard BAL-005-0.2b, R10, R12.3: (http://www.nerc.com/files/BAL-005-0_2b.pdf)
3. NERC Operating Manual , NERC Dynamic Transfer Reference Guidelines: (<http://www.nerc.com/comm/OC/Pages/Operating-Manual.aspx>)
4. NERC Standard INT-001-3, R1: (<http://www.nerc.com/files/INT-001-3.pdf>)
5. NERC Standard INT-004-3.1: (<https://www.nerc.com/pa/Stand/ReliabilityStandardsCompleteSet/RSCCompleteSet.pdf>)
6. NERC Standard BAL-003-0.1b—Frequency Response and Bias, R4, R6: (http://www.nerc.com/files/BAL-003-0_1b.pdf)
7. PJM Manual 1—Control Center and Data Exchange Requirements, Section 5.2.1: (<http://www.pjm.com/~media/documents/manuals/m01.ashx>)
8. PJM Manual 14D—Generator Operational Requirements, Section 4.1.4: (<http://www.pjm.com/~media/documents/manuals/m14d.ashx>)
9. PJM Regional Transmission and Energy Scheduling Practices document, section Section 1.2.12: (<http://www.pjm.com/~media/committees-groups/committees/mic/20160210/20160210-item-09c-regional-transmission-and-energy-scheduling-practices-v25-clean.ashx>)
10. PJM Manual 3A—Energy Management System Model Updates and Quality Assurance (<http://www.pjm.com/~media/documents/manuals/m03a.ashx>)
11. NERC Standard BAL-002-1—Disturbance Control Performance, R2.6: (<http://www.nerc.com/files/bal-002-1.pdf>)
12. PJM Manual 14D—Generator Operational Requirements, Section 8: (<http://www.pjm.com/~media/documents/manuals/m14d.ashx>)
13. PJM Manual 11—Energy & Ancillary Services Market Operations: (<http://www.pjm.com/~media/documents/manuals/m11.ashx>)
14. PJM Manual 12—Balancing Operations, Sections 4.4, 4.5: (<http://www.pjm.com/~media/documents/manuals/m12.ashx>)
15. PJM Manual 18—PJM Capacity Market, Revision 28, Sections 4.2.2: (<http://www.pjm.com/~media/documents/manuals/m18.ashx>)
16. PJM Manual 10—Pre-Scheduling Operations, Sections 2: (<http://www.pjm.com/~media/documents/manuals/m10.ashx>)
17. Operating Agreement of PJM Interconnection, L.L.C., Section 1.7.19A.01: (<https://agreements.pjm.com/oatt/4464>)
18. PJM Open Access Transmission Tariff, Attachment K, Section 1.12 (<https://agreements.pjm.com/oatt/4469>)

19. NERC Standard BAL-001-1 — Real Power Balancing Control Performance, R3, R4: (https://www.nerc.com/_layouts/15/PrintStandard.aspx?standardnumber=BAL-001-1&title=RealPowerBalancingControlPerformance&jurisdiction=UnitedStates)
20. NERC Standard BAL-003-1 ~~0~~ — Frequency Response and Frequency Bias Setting, R4: (https://www.nerc.com/files/BAL-003-0_1b.pdf)

Revision History

Revision 39 (02/21/2019)

- Section 3 and Attachment D – removed version numbers from BAL-001 and BAL-002 references
- Added sub section 3.6 for Primary Frequency Response Performance
- Cover to cover periodic review

Revision 38 (04/20/2018):

- Section F.2, previously section F.4, completely revised to reflect new eligibility criteria approved by FERC in the External Capacity Filing as well as updated language for Estimates, PJM Deliverables and Withdrawals.
- Section F.3 contains minor changes including removal of feasibility language which was moved to section F.2
- Section F.4, previously section F.2, includes updated PowerMeter submission language.
- Section F.5 contains minor changes to reflect updates made in the previous sections.

Revision 37 (11/16/2017):

- Update to Section 4.6.9 to add requirements for new Black Start units entering the service.

Administrative Change (11/06/2017):

- Update to Section 4.6.1 to replace reference to Manual 14D: Section 9: Black Start Selection Process/Black Start Replacement Process to Section 10: Black Start Generation Procurement

Revision 36 (02/01/2017):

- Update to Section 4.4.3 to update regulation requirement definition.

Revision 35 (08/25/2016):

- Update to Section 4.4- Regulation to clarify/remove language to align with current operations and removal of information already outlined in Manual 11- Energy & Ancillary Services Market Operations
- Update to Section 3.1.3 PJM Member Control Implementation with conforming changes to current data exchange
- Update to Attachment E- PJM Reporting Of NERC BAL Standard and Section 3.1.1 PJM Area Control Error to align with newly approved NERC balancing standards
 - o BAL-001-1, BAAL replaces CPS2, reporting requirement removed
 - o BAL-003-1, Updated Frequency Bias calculation and timeline

- o Update black start links and conforming changes in Section 4.6.10 Performance Standards and Attachment C: PJM Black Start Test Report Form

Revision 34 (04/28/2016):

- *Added Attachment F: Dynamic Transfers*
- *Administrative Change:*
 - o Updated references from eMkts to Markets Gateway
 - o Updated references from eMeter to Power Meter

Revision 33 (12/01/2015):

- Updates to Section 3.2 around Time Error Correction to eliminate mention of Midwest ISO as the Interconnection Time Monitor.
- Updates to Section 4.1.1 and Appendix A around the “Instantaneous Reserve Check” to correspond with recent changes to the IRC application & process within eDART.
- *Administrative Change:*
 - o Updated references from edata to Data Viewer
 - o Updated references from eMkts to Markets Gateway
- Periodic Review

Revision 32 (04/06/2015):***Updates to Section 4.4 and 4.5 and any subsections within it:***

- Language for regulation range
- Language on regulation testing requirements
- Language on basepoint definition
- Added new Exhibit 12 and corrected Exhibit numbers accordingly
- *Administrative Change:* Updated references from ESS to ExSchedule

Revision 31 (08/21/2014):***These changes pertain to Section 4.5 and any subsections within it:***

- *“PJM Actions” section added to Section 4.5 - Taken from previous subsections to give an overall description*
- *Examples of “signal path change” given in Section 4.5.1*
- *Added value of basepoint in PJM Member Actions*
- *Notification time changed from 60 minutes to 24 hours*
- *No self-test for increasing regulating capability*
- *Corrected typo in Performance Score Calculation*

Revision 30 (12/1/2013):

- Regulation Requirement will be a fixed value (525 MW off-peak 700 MW on-peak) in lieu of a percentage of the Load Forecast.

Revision 29 (11/01/2013):

Two changes for calculation of performance scores:

- §4.5.9 Performance Scores during Periods with Insufficient Data – When data is unavailable during the operating for periods of greater than 15 contiguous minutes or partial hour assignment the historical performance score will be used as the actual hourly performance score.
- §4.5.10 Performance Scores for Regulation Assignments with Limited Notification – Performance scoring will be 10 minutes after PJM Dispatch logs that a resource is providing regulation.

Revision 28 (9/9/2013):

- Section 4.6 - Updated language to reflect the System Restoration Strategy Task Force recommendations for Black Start Service changes.
- Attachment C – Updated link for Black Start Test Report Forms

Revision 27 (12/20/2012):

- Section 3.5 – Update language on inadvertent interchange.
- Section 4.5 – Update language regarding regulation testing for signal path re-tests.
- Section 5.1 – Added additional clarity on the manual dispatch process for all resources.
- Section 5.4 – Following a review of the Southwestern Blackout Recommendations #13 and #23, a NOTE has been added regarding generation redispatch for non-market facilities exceeding the Load Dump limit.
- Attachment B – Following a review of the Southwestern Blackout Recommendations #13 and #23, a statement has been added that generation redispatch is initiated for post-contingency flows on non-market facilities exceeding the Load Dump limit.
- Attachment E – Clarified language on inadvertent interchange and included language regarding BAL-006.

Revision 26 (effective 9/19/2012):

- Section 2.1.2 – PC Applications added detail about Performance Score Calculation Engine (PSCE).
- Section 3.1.2 – PJM Control Implementation added detail about Regulation A and Regulation D signal.
- Section 3.1.3 – PJM Member Control Implementation added detail about Regulation A and Regulation D signal.

- Section 4.4.2 – Regulation Signals added detail regulation controls signals sent by PJM, including Regulation D, and signals sent by PJM members.
- Section 4.5.1 – Regulation Qualification Test removed square wave and Rate of Compliance for Regulation A testing and added detail for Regulation D testing as well as new PJM Actions and PJM Member Actions.
- Section 4.5.2 – Certifying Regulating Resource added language clarifying self testing as well as new PJM Actions and PJM Member Actions.
- Section 4.5.3 – Certifying Multiple Combustion Turbines or Hydro Units at a Single Site added language methodology to group resources for regulation.
- Section 4.5.4 – Increasing Regulation Capability on a Resource added language clarifying the use of self testing as well as new PJM Actions and PJM Member Actions.
- Section 4.5.6 – Performance Score Calculation this is a new section that replaces the rate of compliance calculation with the performance score calculation method that uses accuracy, delay and precision to evaluate a resources response to the PJM regulation control signal as well as new PJM Actions and PJM Member Actions.
- Section 4.5.7 – Performance Groups this is a new section that describes the data transfer needed for resources that would like to be evaluated together or that will follow other than proportional dispatch as well as new PJM Actions and PJM Member Actions.

Revision 26 (effective 10/1/2012):

- 4.1.2 Loading Reserves add clarification about priority of following regulation during a synchronized reserve event.
- Section 4.4.1 – PJM RTO Regulation Market Obligations added detail about Regulation Requirement and Regulation Offer price.
- Section 4.4.3 – Determining Regulation Assignments changed regulation requirement from 1% to 0.78% and 0.70% variable percentage based on effective MWs.
- Section 4.4.4 – Dispatching Regulation added detail about Regulation A and Regulation D signal.
- Section 4.5.5 – Disqualification and Requalification of a Regulating Resource this section completely replaced the existing section and describes the calculation of the historic performance score which is the last 100 operating hours of the regulating resource or the weighted average of the qualification score as well as new PJM Actions and PJM Member Actions. It also sets the qualification performance threshold at 40%.
- 4.5.8 Performance Scores for Regulation Resources during a Synchronized Reserve Event this section details how Performance Scores will be treated during a Synchronized Reserve Event.

Revision 25 (06/28/2012):

- Updated Section 4 to clarify with Blackstart language.

- Update Exhibit 16 in Section 5.1 to remove DVP voltage limits. Also clarify references to Exhibits 11 and 12 which should have been 15 and 16.
- Updated Section 4.4 requiring AGC for generators providing regulation per BAL-005-0.1b (R2).
- Annual review of M-12

Revision 24 (04/03/2012):

- Attachment B: Updated language regarding PJM issuing PCLLRWs for non-market facilities. Added language regarding post-contingency low voltage PCLLRWs.

Revision 23 (11/16/2011):

- Attachment A: Added note for clarity on IRC calculations. Need to reflect regulation assignments.
- Attachment B: Updated language regarding PJM issuing PCLLRWs for non-market facilities.
- Section 4.6.17: Remove this section completely to incorporate into M-27.
- Section 4.6.15: Remove responsibility for GO to send blackstart test results to LCC.
- Throughout: Update UDS and LAUDS to RT-SCED and IT-SCED, respectively.
- Throughout: Update UDS and LAUDS to RT-SCED and IT-SCED, respectively.

Revision 22 (05/13/2011):

- Attachment A: Updated to reflect June 2010 changes to IRC reporting.

Revision 21 (10/01/2010):

- Attachment B: Transmission Constraint Control Guidelines: Replaced existing note box in section B.2 Generation Redispatch to reflect revision to PJM tariff regarding energy resource curtailments (Docket #ER10-1762-000).

Revision 20 (10/05/2009):

- Annual Review of Manual 12

Revision 19 (06/30/2009):

- Section 4 - Revision included throughout manual to consolidate references and language related to black start resources
- Section 4 – New language to outline NERC standards cost recovery guidelines.
- Made updates to reserves section of Section 4 – changes secondary to supplemental
- Added language to Attachment B for wind operations / curtailments

Revision 18 (07/02/2008):

- Version to correct real-time controlling actions for BES non-market facilities.

Revision 17 (07/01/2008):

- Section 5: Transmission Facility Control - Defined Generation Redispatch procedures for Market versus Non-Market facilities
- Attachment B: Transmission Constraint Control Guidelines – Defined Generation Redispatch procedures for Market versus Non-Market facilities.

Revision 16 (11/01/2007):

- Clarified language for synchronized reserves to include implementing upon the contingent loss of generation equal to 80% or more of its most severe single contingency.
- Added clarification language on black start testing.

Revision 15 (05/15/2007):

- General: Changed references from Control Center Requirements Manual / Dispatching Operations Manual to Control Center and Data Exchange Manual / Balancing Operations Manual.
- Section 2: Added references to EMS alarms generated
- Section 3: Provided additional detail for PJM's ACE calculation and compliance monitoring and reporting efforts performed by Performance Compliance Department. Also relocated Manual 11, Section 7, "External Transaction Scheduling" to this section (PJM Member Actions). Provided clarity
- Section 4: Deleted all references to Automatic Reserve Sharing System for ECAR and MAIN Regions. Provided clarity on Minimum Critical Blackstart requirements, referencing PJM System Restoration Manual, Attachment A: Minimum Critical Black Start Requirement.
- Section 5: Modified Exhibit 17. Deleted Voltage Coordination Plan.
- Section 7: Relocated this section to Manual 12, Section 3, "System Control"
- Attachment H: Added PJM reporting of NERC BAL standard
- Throughout: Added references to applicable NERC standards
- Throughout: Renamed the manual from Dispatching Operations to Balancing Operations and then changed all "dispatching operations" to "balancing operations" within the manual

Revision 14 (03/01/2007):

- Section 3: (System Control) Modified to clarify the information supplied during dispatch operations.
- Section 4: Providing Ancillary Services—Revised to clarify existing PJM black start business procedures and testing requirements for better alignment with RFC standards.

- Attachment B: (Transmission Constraint Control Guidelines) Modified to clarify the procedures for Generation Redispatch
- Attachment C: PJM Black Start Test Report Form—Revised in line with black start testing requirement changes in Section 4 for better alignment with RFC standards.
- Introduction trimmed to eliminate redundant information.
- List of PJM Manuals exhibit removed, with directions given to PJM Web site where all the manuals can be found. All other exhibits renumbered.
- Revision History permanently moved to the end of the manual.

Revision 13 (5/26/06):

- Revised to reflect changes including demand participation in Ancillary Service Markets, modifications to IRC, common Regulation Market, and Dispatching tools.

Revision 12 (08/16/05):

- Section 4: (Providing Ancillary Services)
- Revised to reflect recent changes to Black Start Service Business Processes
- Included new [Attachment C: PJM Black Start Test Report Form](#)
- Included new [Attachment D: PJM Auto Load Reject Test Report Form](#)
- Included new [Attachment E: PJM Black Start Formulaic Cost Data Form](#)
- Included new [Attachment F: PJM Black Start Actual Cost Data Form](#)

Revision 11 (01/01/05):

- Sections 1, 2, 3, 5
- Revised to reflect operations based on the integration of ComEd, AEP, Dayton Power and Light, Duquesne Light, and Dominion

Revision 10 (01/01/04):

- Section 4 (Providing Ancillary Service)
- Revised to reflect the regulation limit relationships.
- Replaced Exhibit 1 with an updated list of PJM Manuals.

Revision 09 (12/01/02):

- Revised Section 4: Providing Ancillary Services
- Incorporated the procedures that the PJM follows to ensure and monitor Black Start Service.

Revision 08 (04/01/02):

- Section 1: Overview

- o Incorporated PJM West / West duties.
- Section 2: Dispatching Tools
 - o Incorporated UDS, EES, eData, SCIS, Emergency Procedure Posting Application, All-call software, and Satellite Phones. Removed Accounting Information section and exhibit.
- Section 3: System Control
 - o Included reassigning regulation while on Analog Control, Updated Time Error Correction procedure.
- Section 4: Providing Ancillary Services
 - o Incorporation of eDart reporting, implementation of Shared Reserves for DCS events, ARS (PJM West), and Regulation Requirement (PJM West).
- Section 5: Transmission Facility Control
 - o Clarification of participant duties (Transmission / Generation).
- Attachment A: Instantaneous Reserve Check
 - o Removal of company names.
- Attachment B: Voltage Control
 - o Attachment Eliminated.

Revision 07 (05/22/01):

- Revised to reflect implementation of PJM Regulation Market.
- Removed Attachment A: Definitions & Abbreviations. Attachment A is being developed into a 'new' PJM Manual for **Definitions and Abbreviations (M-35)**.
- Removed Attachment B: Three-Point Curve Utilization.
- Renamed Attachment C: PJM Instantaneous Reserve Check and Attachment D: Voltage Control, to Attachment A and Attachment B, respectively.

Revision 06 (06/01/00):

- Section 04: Providing Ancillary Services
 - o Revised subsection *Regulation* to reflect changes required to implement the PJM Regulation Market on June 1, 2000.
- Attachment E: Process Diagrams
 - o Removed to reflect changes required to implement the PJM Regulation Market on June 1, 2000.

Revision 05 (04/01/00):

- Section 05: Transmission Facility Control

- o Removed reference to Maximum Scheduled Generation within subsections: Corrective Control Strategies, Reactive Limitation Control, and NERC Transmission Loading Relief (TLR) Procedure.

Revision 04 (06/03/99):

- Section 02: Dispatching Tools
 - o Moved *Generation Control System* from Mainframe Computer Applications section to PC Applications section.
 - o Removed *System Security*, *Megawatt Monitor*, and *Marginal Scheduler* from Mainframe Computer Applications section.
 - o Added *Network Analysis and SCADA Programs* and *Resource Scheduling and Commitment* to, and removed *Transmission Security System (TSS)* and *Future TSS* from, the PC Applications section.
 - o All these changes made to reflect installation of the new Siemens Energy Management System (EMS).
- Changed all references to General Agreement on Parallel Paths (GAPP) to Interchange Distribution Calculator (IDC) to reflect new NERC application.
- Modified section on *Dynamic Mapboard* to reflect the fact that it is now driven by the new Siemens computer.
- Section 05: Transmission Facility Control
 - o Added information concerning PJM implementation of the NERC Transmission Loading Relief (TLR) Procedure.

Revision 03 (04/01/98):

- Section 02: Dispatching Tools
 - o Revised Exhibit 2.1 to reference "Locational Marginal Price" rather than "Market Clearing Price."

Revision 02 (01/01/98):

- Section 04: Providing Ancillary Services
- Changed "The Regulating Requirement for the PJM RTO is 1.1% of the forecast peak load during On-Peak Periods (from 0500-2359 hours) and 1.1% of the forecast valley during Off-Peak Periods load (from 0000-0459 hours)." from "The Regulating Requirement for the PJM RTO is 1.1% of the forecast peak load during On-Peak Periods (from 0700-2259 hours) and 1.1% of the forecast valley during Off-Peak Periods load (2300-0659 hours)." under "Obligations & Requirements" of "Regulation."

Changed equation:

$$LSEsRegulationObligation = (LSEsLoadAllocationPercentage * PJMRegulationRequirement) - LSEsShareofJoint - OwnedUnitRegulation$$

from:

$$LSEsRegulationObligation = (LSEsLoadAllocationPercentage * PJMRegulationRequirement) - LSEsShareofKeystoneandConemaughRegulation$$

under “Determining Regulation Assignment” of “Regulation.”

- Changed “During On-Peak Periods (0500 hours to 2359 hours), the PJM Regulating Requirement is 1.1 % of the PJM RTO’s peak load forecast, as determined prior to 0430 hours” from “During On-Peak Periods (0700 hours to 2259 hours), the PJM Regulating Requirement is 1.1 % of the PJM RTO’s peak load forecast, as determined prior to 0630 hours” under “Obligations & Requirements” of “Regulation.”
- Changed “During Off-Peak Periods (0000 hours to 0459 hours), the PJM Regulating Requirement is 1.1 % of the PJM RTO’s valley load forecast, as determined prior to 2330.” from “During Off-Peak Periods (2300 hours to 0659 hours), the PJM Regulating Requirement is 1.1 % of the PJM RTO’s valley load forecast, as determined prior to 2230.” under “Obligations & Requirements” of “Regulation.”
- Changed “Prior to 0430 and 2330 each day, the PJM dispatcher provides the following information to the Local Control Centers for the LSEs, via the PJM ALL-CALL:
- PJM forecasted peak load and the PJM forecasted valley load for 0430 and 2330, respectively”
- from “Prior to 0630 and 2230 each day, PJM dispatcher provides the following information to the Local Control Centers for the LSEs, via the PJM ALL-CALL:
 - o PJM forecasted peak load and the PJM forecasted valley load for 0630 and 2230, respectively”

under “Obligations & Requirements” of “Regulation.”

Changed “Scheduled MW of Joint-Owned Unit Regulation” from “Scheduled MW of joint-owned Regulation for Keystone and Conemaugh Stations” under “Determining Regulation Assignment” of “Regulation.”

Changed “The LSE decides the method of meeting its Regulation Obligation, subsequent to the PJM ALL-CALL notification but no later than 0430 or 2330 for On-Peak and Off-Peak Periods, respectively; the LSE dispatcher reports to PJM the MWs of Regulation by class to meet the LSE’s Regulation objective, plus the amount (MW) of any additional Regulation by class which is presently available to regulate.” from “The LSE decides the method of meeting its Regulation Obligation, subsequent to the PJM ALL-CALL notification but no later than 0630 or 2230 for On-Peak and Off-Peak Periods, respectively; the LSE dispatcher reports to PJM the MWs of Regulation by class to meet the LSE’s Regulation objective, plus the amount (MW) of any additional Regulation by class which is presently available to regulate.” under “Determining Regulation Assignment” of “Regulation.”

- Attachment E: Process Diagrams
 - o Added “Attachment E: Process Diagrams”

Revision 01 (07/08/97):

- Section 2: Dispatching Tools
 - o Added “Note: In Exhibit 2.1, **Congestion Payment Status** and **Participant Paying Congestion** Data Fields are required for transactions utilizing the option of non-firm transmission service willing to pay congestion which were scheduled and approved prior to June 28, 1997” under “Accounting Information.”
- Section 5: Transmission Facility Control
 - o Deleted “...and for non-firm transactions willing to pay congestion” from Exhibit 5.2 note under “Corrective Control Strategies.”

Revision 00 (04/30/97):

- Changed references from PJM Interconnection Association to PJM Interconnection, L.L.C.
- Changed references from PJM to PJM where appropriate.
- Changed references from PJM to PJM RTO where appropriate.
- Changed references from PJM IA to PJM.
- Changed references from IA to PJM.
- Changed references from Mid-Atlantic Market to PJM Interchange Energy Market.
- Changed references from Mid-Atlantic Market Operations Agreement to Operating Agreement of PJM Interconnection, L.L.C.

Revision 00 (03/24/97):

- This revision is a draft of the PJM Manual for ***Balancing Operations***.