

Summer 2017 Overview

Chris Pulong
Dispatch



- Hot Weather Summary
- GMD activity



HWAs and peak loads (June-August)

Date	Zone	Peak Load
6/11	RTO	123,602MW
6/12	RTO	140,954MW
6/13	RTO	138,617MW
6/30	Mid-Atlantic	130,513MW

Date	Zone	Peak Load
7/11	Mid-Atlantic & Dom	130,266MW
7/12	RTO	135,611MW
7/13	DOM/Mid-Atl	135,385MW
7/14	DOM	125,780MW
7/19	DOM/EKPC	145,627MW
7/20	RTO	145,320MW
7/21	RTO	141,862MW
7/22	Mid-Atlantic & Dom	126,901MW

Date	Zone	Peak Load
8/22	Mid-Atlantic & Dom	135,556MW

July 19, 2017 Peak to Date

Average temperatures in June, July and above average in August

RTO Peak	145,627 MW @ 1800
Mid Atlantic	53,899 MW @ 1800
Dominion	18,218 MW @ 1800
Generation Outages	16,538 MW
RTO Net Scheduled Interchange	2,905 MW (Exporting)
Economic Demand Response	0 MW

Strong Voltage Profile, Minimal Transmission Limitations




GMD Warning (9/7-9/8)




- SWPC issued GMD Warning of K7 or greater (G3) 9/7 1900hrs – 9/8 0200hrs.
 - Extended through 9/8/17 1700hrs
- Increased GIC measurements observed, but thresholds for triggering Emergency Procedures were not met.
 - No impacts to PJM system.

GMD Activity

GMD K7 (G3)

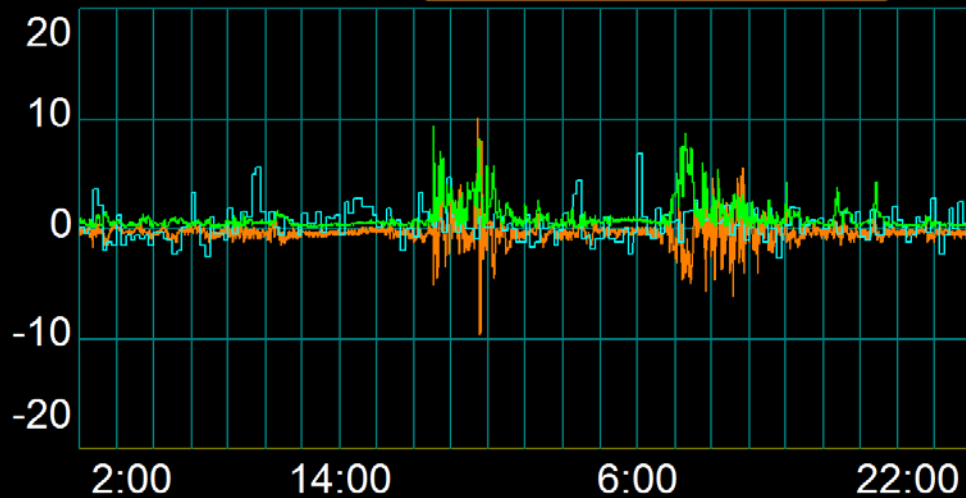

State Line
Meadow Br
Libertyville

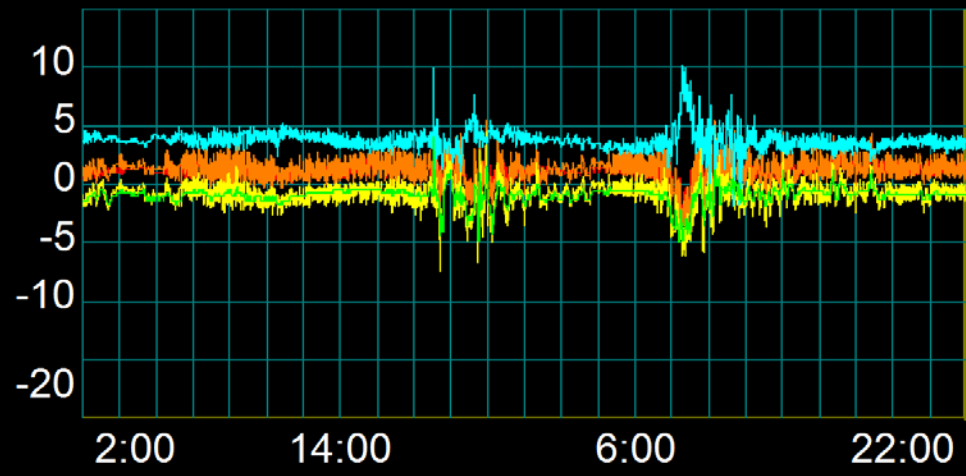

Limerick
PeachB.
Whitpain 1
Whitpain 2
Whitpain 3

Scale	Description	Effect	Physical measure	Average Frequency (1 cycle = 11 years)
G 5	Extreme	<p>Power systems: Widespread voltage control problems and protective system problems can occur, some grid systems may experience complete collapse or blackouts. Transformers may experience damage.</p> <p>Spacecraft operations: May experience extensive surface charging, problems with orientation, uplink/downlink and tracking satellites.</p> <p>Other systems: Pipeline currents can reach hundreds of amps, HF (high frequency) radio propagation may be impossible in many areas for one to two days, satellite navigation may be degraded for days, low-frequency radio navigation can be out for hours, and aurora has been seen as low as Florida and southern Texas (typically 40° geomagnetic lat.).</p>	Kp = 9	4 per cycle (4 days per cycle)
G 4	Severe	<p>Power systems: Possible widespread voltage control problems and some protective systems will mistakenly trip out key assets from the grid.</p> <p>Spacecraft operations: May experience surface charging and tracking problems, corrections may be needed for orientation problems.</p> <p>Other systems: Induced pipeline currents affect preventive measures, HF radio propagation sporadic, satellite navigation degraded for hours, low-frequency radio navigation disrupted, and aurora has been seen as low as Alabama and northern California (typically 45° geomagnetic lat.).</p>	Kp = 8, including a 9-	100 per cycle (60 days per cycle)
G 3	Strong	<p>Power systems: Voltage corrections may be required, false alarms triggered on some protection devices.</p> <p>Spacecraft operations: Surface charging may occur on satellite components, drag may increase on low-Earth-orbit satellites, and corrections may be needed for orientation problems.</p> <p>Other systems: Intermittent satellite navigation and low-frequency radio navigation problems may occur, HF radio may be intermittent, and aurora has been seen as low as Illinois and Oregon (typically 50° geomagnetic lat.).</p>	Kp = 7	200 per cycle (130 days per cycle)
G 2	Moderate	<p>Power systems: High-latitude power systems may experience voltage alarms, long-duration storms may cause transformer damage.</p> <p>Spacecraft operations: Corrective actions to orientation may be required by ground control; possible changes in drag affect orbit predictions.</p> <p>Other systems: HF radio propagation can fade at higher latitudes, and aurora has been seen as low as New York and Idaho (typically 55° geomagnetic lat.).</p>	Kp = 6	600 per cycle (360 days per cycle)
G 1	Minor	<p>Power systems: Weak power grid fluctuations can occur.</p> <p>Spacecraft operations: Minor impact on satellite operations possible.</p> <p>Other systems: Migratory animals are affected at this and higher levels; aurora is commonly visible at high latitudes (northern Michigan and Maine).</p>	Kp = 5	1700 per cycle (900 days per cycle)