

***Generation Interconnection
System Impact Study Report***

For

***PJM Generation Interconnection Request
Queue Position AD2-135***

“Williamstown 12 kV”

February 2019

Preface

The intent of the System Impact Study is to determine a plan, with approximate cost and construction time estimates, to connect the subject generation interconnection project to the PJM network at a location specified by the Interconnection Customer. As a requirement for interconnection, the Interconnection Customer may be responsible for the cost of constructing: Network Upgrades, which are facility additions, or upgrades to existing facilities, that are needed to maintain the reliability of the PJM system. All facilities required for interconnection of a generation interconnection project must be designed to meet the technical specifications (on PJM web site) for the appropriate transmission owner.

In some instances an Interconnection Customer may not be responsible for 100% of the identified network upgrade cost because other transmission network uses, e.g. another generation interconnection or merchant transmission upgrade, may also contribute to the need for the same network reinforcement. The possibility of sharing the reinforcement costs with other projects may be identified in the Feasibility Study, but the actual allocation will be deferred until the System Impact Study is performed.

The System Impact Study estimates do not include the feasibility, cost, or time required to obtain property rights and permits for construction of the required facilities. The Interconnection Customer is responsible for the right of way, real estate, and construction permit issues. For properties currently owned by Transmission Owners, the costs may be included in the study.

General

The Township of Monroe, Gloucester County, New Jersey, the Interconnection Customer (IC), has proposed a 1.62 MW (0.60 MWC) solar generating facility to be located on Sicklerville Road, Monroe Township, Gloucester County, New Jersey. PJM studied the AD2-135 project into the Atlantic City Electric Company (ACE) system at the Sickler 69/12 kV Substation and evaluated it for compliance with reliability criteria for summer peak conditions in 2021. AD2-135 was studied with a commercial probability of 100%. The planned in-service date, as requested by the IC, is August 1, 2019. This date may not be attainable due to additional required PJM studies and Transmission Owner construction schedules.

Point of Interconnection

The IC requested a distribution level interconnection. As a result, AD2-135 will establish a new point of interconnection with the ACE distribution system at the Sickler Substation 69/12 kV T4 transformer as follows:

- 1.62 MWs of generation will connect to the 69/12 kV T4 transformer at the Sickler Substation via a tap of the existing feeder NJ1733.

Direct Connection Requirements

Criteria Limits for Distributed Energy Resource (DER) Connections to the ACE, DPL and Pepco Distribution Systems (less than 69kV)

1. Single Phase Limit

Any DER with a capacity that exceeds 100 kW shall be a balanced 3 phase system.

2. Voltage Limits

DER's are permitted to cause a voltage fluctuation of up to 2% at the Point of Interconnection, ½ the band width of any voltage regulator at its terminals, and ½ the net dead band of a switched capacitor bank at its connection point. When a DER is at maximum output, it shall not raise the feeder voltage above the ANSI C84.1 or state limit, whichever is more conservative.

3. Existing Distribution Circuit Capacity Limits

The aggregate limit of large (250 kW and over) generators running in parallel with a single, existing distribution circuit is 0.5 MWs on the 4kV, 3MWs on the 12 kV, 6 MWs on the 25 kV, and 10 MWs on the 34 kV.

4. Express Circuit Capacity Limits

Distributed generation installations which exceed the criteria limit for an existing circuit require an express circuit.

The maximum generator size for express circuits shall be:

- 4 kV 0.5 MW
- 12 – 13.8 kV 10 MW
- 23 – 25 kV 10 MW
- 33.26 – 34.5 kV 15 MW

5. Distribution Power Transformer Limit

The aggregate limit of large (250 kW and over) generator injection to a single distribution transformer of 22.5 MVA nameplate or larger is 10 MW. Transformers with nameplate ratings lower than 22.5 MVA will be given lower ratings on an individual basis. If the transformer rating is significantly greater than 40 MVA it may be possible to consider a greater generation capacity.

Adding a new transformer will be considered if there is no availability on any of the existing transformers and space is available in an existing substation. Any proposed transformers would be ACE's standard distribution transformer.

6. Express Circuit Length Limit

If there is no space for an additional transformer at the closest substation, the next closest substation will be considered. The length of an express circuit is limited to 5 miles, or for the sake of the impact study, 3.8 straight line miles to the substation. This simplification is used because the impact study phase does not allow for the time and resources to examine routes in detail (including existing pole lines, easements, ROW, and environmental issues etc.)

7. When a New Substation is Required

If a distribution express circuit can't be built from an existing substation for a project, it will be necessary to construct a new distribution substation with a standard ring bus design. It will be

supplied by extending existing transmission lines. It is the developer's responsibility to verify eligibility of this configuration for solar renewable energy certificates.

All limits, given above in MWs, are subject to more detailed study to ensure feasibility.

Transmission Owner Scope of Work

Transmission Owner scope of work required to accommodate 1.6 MW of generation via NJ1733 Feeder from Sickler T4:

1. A utility operated recloser equipped with the proper relaying and communications will be required.
2. Utility grade primary metering will be required.
3. Generation telemetry and remote trip capability will be provided to the control center.

Estimated Costs

Sickler Substation T4			
Recloser & Metering			\$92,000
SCADA Integration into EMS			\$11,500
Miscellaneous Engineering Costs			\$69,000
Approximate Total Cost			\$172,500

The estimated time to complete this work is **6 - 9** months after receipt of a fully executed interconnection agreement.

Interconnection Customer Scope of Work

The IC is responsible for all design and construction related to activities on their side of the Point of Interconnection. Site preparation, including grading and an access road, as necessary, is assumed to be by the IC. Route selection, line design, and right-of-way acquisition of the direct connect facilities is not included in this report, and is the responsibility of the IC.

Protective relaying and metering design and installation must comply with ACE's applicable standards. The IC is also required to provide revenue metering and real-time telemetering data to PJM in conformance with the requirements contained in PJM Manuals M-01 and M-14 and the PJM Tariff.

The IC will purchase and install all metering instrument transformers as well as construct a metering structure per ACE's specifications. The secondary wiring connections at the instrument transformers will be completed by the IC's contractors and inspected by ACE, while the secondary wiring work at the metering enclosure will be completed by ACE's Meter technicians. The metering control cable and meter cabinets will be supplied by ACE and installed by the IC's contractors. ACE's meter technicians will program and install two solid state multi-function meters (Primary & Backup) for the new metering position. Each meter will be equipped with load profile, telemetry, and form-c pulse outputs. The ownership of metering equipment purchased or installed by the IC shall be transferred to

the Transmission Owner at Commercial Operation, unless the IC asserts its right to install, own and operate the metering system.

Inverter Requirements and Capabilities

The inverter at the DG location shall have the following capabilities:

- Voltage flicker reduction through dynamic VAR or fixed PF response
- Ramp rate control
- SCADA communications
- Curtailment or other mitigation ability if high voltage were to occur
- Disturbance Ride through for both Voltage and Frequency
- Ability to receive and respond to a transfer trip signal
- Ability to adjust PF or VARs based on utility signal
- Ability to Adjust Real Power Output based on utility signal
- Ability to operate on a Volt/VAR schedule
- Ability to maintain a voltage schedule

The inverter shall operate in accordance with the IEEE 1547 series of standards that have been approved and use default settings except when specified otherwise by ACE. The IC owner/operator shall cooperate with ACE to implement these capabilities with settings acceptable to ACE. ACE reserves the right to request setting changes in the future if needed to maintain electrical system integrity.

Security Requirements

It is the responsibility of the owner to secure the generator or inverter from any unauthorized access (including physical and remote access) which could alter settings or adversely affect its ability to operate as required. Security measures should include utilizing secure password settings and/or physical locks on cabinet doors.

Power Factor Requirement

The generators used for this project shall be capable of operating at a power factor (or schedule) specified by ACE in the range of 0.95 lead to 0.95 lag. It is the responsibility of the developer/customer to obtain equipment that can operate with these requirements while also meeting all applicable requirements of IEEE and UL standards such as but not limited to IEEE 1547 and UL 1741.

For this project, operate inverters at a unity power factor ("PF") of (**1.0**) not impacting Volt-ampere reactive ("VARs") continuously.

High Voltage Warning

Typically, voltage received at the meter from the utility can be up to 105% of nominal (without generation on). Normal operating procedures dictate that voltage at the substation be raised to the higher end of an acceptable bandwidth in order to provide adequate supply to distant customers. It is recommended that transformers with no load taps should be used to adjust secondary voltage to avoid the possibility of inverter trips. Failure to account for this may result in lost energy production.

Additional Operating Requirements

1. ACE will require the capability to remotely disconnect the generator from the grid by communication from its System Operations facility. This will be accomplished with a line recloser.
2. It is the IC's responsibility to send the data that PJM and ACE requires directly to PJM (or in some cases to ACE directly). The IC will grant permission for PJM to send ACE the following telemetry that the IC sends to PJM: real time MW, MVAR, volts, amperes, generator/status, and interval MWH and MVARH.
3. The IC will be required to make provisions for a voice quality phone line within approximately 3 feet of each ACE metering position to facilitate remote interrogation and data collection.
4. A mutually acceptable means of interrupting and disconnecting the generator with a visible break, able to be tagged and locked out, shall be worked out with ACE Distribution Engineering.
5. ACE reserves the right to charge the IC operation and maintenance expenses to maintain the IC attachment facilities, including metering and telecommunications facilities, owned by ACE.

Summer Peak Analysis - 2020

Transmission Network Impacts

Potential transmission network impacts are as follows:

Generator Deliverability

(Single or N-1 contingencies for the Capacity portion only of the interconnection)

None

Multiple Facility Contingency

(Double Circuit Tower Line, Fault with a Stuck Breaker, and Bus Fault contingencies for the full energy output)

None

Contribution to Previously Identified Overloads

(This project contributes to the following contingency overloads, i.e. "Network Impacts", identified for earlier generation or transmission interconnection projects in the PJM Queue)

None

Summer Peak Load Flow Analysis Reinforcements

New System Reinforcements

(Upgrades required to mitigate reliability criteria violations, i.e. Network Impacts, initially caused by the addition of this project generation)

None

Contribution to Previously Identified System Reinforcements

(Overloads initially caused by prior Queue positions with additional contribution to overloading by this project. This project may have a % allocation cost responsibility which will be calculated and reported for the Impact Study)

None

Short Circuit

No issues identified.

Stability and Reactive Power Requirement

Not required.

Light Load Analysis - 2021

Light Load Studies to be conducted during later study phases (as required by PJM Manual 14B).

Delivery of Energy Portion of Interconnection Request


PJM also studied the delivery of the energy portion of this interconnection request. Any problems identified below are likely to result in operational restrictions to the project under study. The developer can proceed with network upgrades to eliminate the operational restriction at their discretion by submitting a Merchant Transmission Interconnection request.

Only the most severely overloaded conditions are listed. There is no guarantee of full delivery of energy for this project by fixing only the conditions listed in this section. With a Transmission Interconnection Request, a subsequent analysis will be performed, which will study all overload conditions associated with the overloaded element(s) identified.

None

Sickler 69/12 kV Sub 1.6 MW PV Solar Generator

Sickler Substation

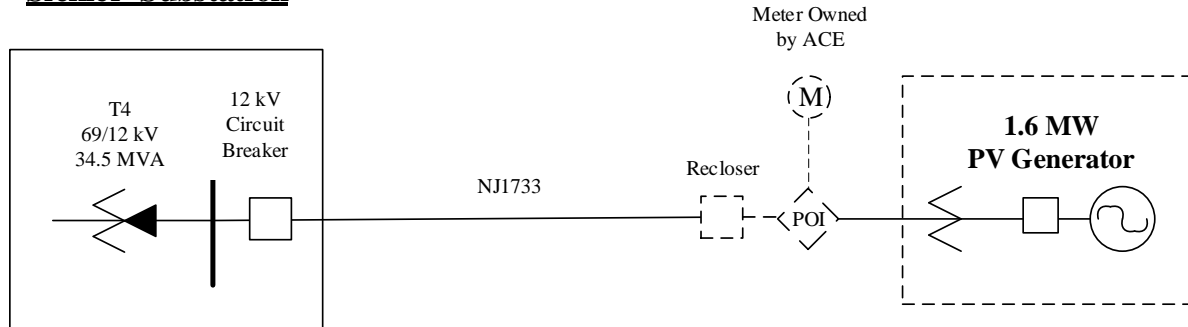

Point of Interconnection