



Working to Perfect the Flow of Energy

Style Definition: PJM_List_Outline_2:
Numbered + Level: 1 + Numbering Style: a, b, c, ... + Start at: 1 + Alignment: Left + Aligned at: 0.55" + Tab after: 0.8" + Indent at: 0.8",
Tab stops: 1.44", Left

PJM Manual 22: Generator Resource Performance Indices

Revision:

Deleted: 16

Effective Date:

Deleted: 06/01/2007

Prepared by

Resource Adequacy Planning

Deleted: Capacity

Deleted: 2007

Deleted: 2009

07

09

Position: Horizontal: 7.45",
age, Vertical: 0", Relative to:

© PJM 2011



PJM Manual 22

Generator Resource Performance Indices

Table of Contents

Table of Contents	ii
Table of Exhibits	iii
Approval	iv
Current Revision	iv
Introduction	1
ABOUT PJM MANUALS	1
ABOUT THIS MANUAL	1
Intended Audience.....	1
References.....	2
USING THIS MANUAL	2
What You Will Find In This Manual.....	2
Section 1: Acronyms	4
1.1 ACRONYM LISTING.....	4
Section 2: Definitions	6
2.1 DEFINITIONS.....	6
Section 3: Equations and Derivations	9
3.1 EQUATIONS.....	9
3.1.1 Data for Units with Five Full Calendar Years of Operating Experience.....	12
3.1.2 Data for Units with Less Than Five Full Calendar Years of Operating Experience and Future Units.....	13
3.2 ITEM A: FULL F-FACTOR DERIVATION (*).....	15
3.3 ITEM B: PARTIAL F-FACTOR DERIVATION.....	18
3.4 ITEM C: MODIFIED TWO-STATE MODEL FOR RELIABILITY CALCULATIONS.....	19
3.5 ITEM D: RULES FOR CONSISTENCY OF GENERATOR OUTAGE RATE CALCULATIONS.....	20
3.6 ITEM E: CAPACITY VARIANCE CALCULATION PROCEDURE FOR EXISTING UNITS.....	20
Revision History	23

- Formatted: Font: 11 pt
- Deleted: 3
- Deleted: 3
- Deleted: 10
- Deleted: 10
- Deleted: 9
- Deleted: 10
- Deleted: 10
- Deleted: 9
- Deleted: 13
- Deleted: 13
- Deleted: 12
- Deleted: 14
- Deleted: 14
- Deleted: 13
- Deleted: 16
- Deleted: 16
- Deleted: 15
- Deleted: 19
- Deleted: 19
- Deleted: 18
- Deleted: 20
- Deleted: 20
- Deleted: 19
- Deleted: 21
- Deleted: 21
- Deleted: 20
- Deleted: 21
- Deleted: 21
- Deleted: 20
- Deleted: 24
- Deleted: 24
- Deleted: 23
- Deleted: 2007
- Deleted: 2009
- Deleted: 0}
- Formatted
- Deleted: 15
- Deleted:
- Deleted:



Table of Exhibits	
EXHIBIT 1: GENERATOR STATES	15
EXHIBIT 2: PARTIAL F-FACTOR TIME PERIOD.....	18

Formatted

~~Deleted:~~ [Table of Contents](#) . 2¶
[Table of Exhibits](#) . 3¶
[Approval](#) . 4¶
[Current Revision](#) . 4¶
[Introduction](#) . 5¶
[ABOUT PJM MANUALS](#) . 5¶
[ABOUT THIS MANUAL](#) . 5¶
[Intended Audience](#) . 5¶
[References](#) . 6¶
[USING THIS MANUAL](#) . 7¶
[What You Will Find In This Manual](#) . 7¶
[Section 1: Acronyms](#) . 8¶
ACRONYM LISTING . 8¶
[Section 2: Definitions](#) . 10¶
DEFINITIONS . 10¶
[Section 3: Equations and Derivations](#) . 13¶
EQUATIONS . 13¶
[Data for Units with Five Full Calendar Years of Operating Experience](#) . 16¶
[Data for Units with Less Than Five Full Calendar Years of Operating Experience and Future Units](#) . 17¶
[ITEM A: FULL F-FACTOR DERIVATION \(*\)](#) . 18¶
[ITEM B: PARTIAL F-FACTOR DERIVATION](#) . 22¶
[ITEM C: MODIFIED TWO-STATE MODEL FOR RELIABILITY CALCULATIONS](#) . 23¶
[ITEM D: RULES FOR CONSISTENCY OF GENERATOR OUTAGE RATE CALCULATIONS](#) . 24¶
[ITEM E: CAPACITY VARIANCE CALCULATION PROCEDURE FOR EXISTING UNITS](#) . 24¶
[Revision History](#) . 28¶
¶
¶
- - - - -Section Break (Next Page)- - - - -

- ~~Deleted:~~ 16
- ~~Deleted:~~ 16
- ~~Deleted:~~ 1519
- ~~Deleted:~~ 19
- ~~Deleted:~~ 19
- ~~Deleted:~~ 1822

- ~~Deleted:~~ 2007
- ~~Deleted:~~ 2009
- ~~Deleted:~~ 0}
- Formatted:** Position: Horizontal: 7.45", Relative to: Page, Vertical: 0", Relative to: Paragraph
- ~~Deleted:~~ 15
- ~~Deleted:~~
- ~~Deleted:~~



Approval

Approval Date:
Effective Date:

Thomas Falin, Manager

Resource Adequacy Planning

Deleted: 11/14/2007

Deleted: 06/01/2007

Deleted: Capacity

Current Revision

Revision 16 (10/01/2011)

- General cleanup and checking the compatibility of all acronyms and definitions between PJM Manuals.

Deleted: 15

Deleted: 06/01/07

Formatted: PJM_Bulleted_Outline_1

Deleted: <#>Revisions for the implementation of the Reliability Pricing Model and general clean-up. ¶

Deleted: 2007

Deleted: 2009

Deleted: 0}

Formatted: Position: Horizontal: 7.45",
Relative to: Page, Vertical: 0", Relative to:
Paragraph

Deleted: 15

Deleted:

Deleted:



Introduction

Formatted

Welcome to the **PJM Manual for Generator Resource Performance Indices**. In this Introduction, you will find the following information:

- What you can expect from the PJM Manuals (see “*About PJM Manuals*”).
- What you can expect from this PJM Manual (see “*About This Manual*”).
- How to use this manual (see “*Using This Manual*”).

About PJM Manuals

The PJM Manuals are the instructions, rules, procedures, and guidelines established by PJM for the operation, planning, and accounting requirements of the PJM and the PJM Energy Market. The manuals are grouped under the following categories:

- Transmission
- PJM Energy Market
- Generation and transmission interconnection
- Reserve
- Accounting and Billing
- PJM administrative services
- Miscellaneous

About This Manual

The **PJM Manual for Generator Resource Performance Indices** is one of a series of manuals within the [Reserve group](#). This manual focuses on data definitions and determinations concerning the past history and future projection of generating unit performance, as required for [Planning](#) and [Market](#) studies and also for other data required for specific planning applications.

Deleted: PJM set of manuals

Deleted: PJM Reliability

Deleted: Capacity Allocation

The **PJM Manual for Generator Resource Performance Indices** consists of three sections. These sections are listed in the table of contents beginning on page ii.

Intended Audience

The intended audiences for the PJM Manual for Generator Resource Performance Indices are:

- PJM Board of Managers – The PJM Board Members are responsible for the administration and approval of the forecast obligation and techniques for determination.
- PJM Reliability Committee – Reliability Committee members are responsible for the review and submittal of the obligations with review of the PJM Board of Managers.
- PJM system planning staff – PJM staff are responsible for the calculation and submittal for approval of the installed reserve requirement, pool forced outage rate,

Deleted: 2007

Deleted: 2009

Deleted: 0}

Formatted: Position: Horizontal: 7.45", Relative to: Page, Vertical: 0", Relative to: Paragraph

Deleted: 15

Deleted:

Deleted:



forecast pool requirement, weather normalized coincident zonal peaks, peak period available ALM, and the PJM ALM Factor. These quantities are required to meet the RAA mandate of establishment of these quantities for applicable future planning periods.

- Other PJM Agreement signatory staff – The staff are responsible for supplying load and generator data in the required format and time period to assist in the calculation and submittal of required quantities.
- PJM audit staff – Auditors are responsible for ensuring Agreements of PJM Interconnection, L.L.C. are fair and consistent among the parties.
- PJM marketing services staff – PJM Marketing Services staff are responsible for monthly billing and maintenance of the accounted-for input data.

References

There are several references that provide background and details:

- [PJM Operating Agreement](#)
- [PJM Open Access Transmission Tariff](#)
- [Reliability Assurance Agreement](#)
- [PJM Manual for: Generator Operational Requirements \(14D\)](#)
- PJM Manual for: [PJM Capacity Market \(M-18\)](#)
- PJM Manual for: [Load Forecasting and Analysis \(M-19\)](#)
- PJM Manual for: [PJM Resource Adequacy Analysis \(M-20\)](#)
- PJM Manual for: [Rules and Procedures for Determination of Generating Capability \(M-21\)](#)
- PJM Manual for: [Billing \(M-29\)](#)
- PJM Manual for: [Definitions and Acronyms \(M-35\)](#)
- [IEEE Standard Definitions for Use in Reporting Electric Generating Unit Reliability, Availability, and Productivity - IEEE Std 762-2005\(R2002\)](#)
- [NERC Generating Availability Data System \(GADS\) Data Reporting Instructions](#)

PJM Manual for Generator Resource Performance Indices does not replace any information in the reference documents. The reference documents are the primary source for specific requirements and implementation details.

Using This Manual

We believe that explaining concepts is just as important as presenting the procedures. This philosophy is reflected in the way we organize the material in this PJM manual. We start each section with an overview. Then, we present details and procedures or references to procedures found in other PJM manuals. The following provides an orientation to this manual's structure.

What You Will Find In This Manual

Deleted: ¶
Deleted: <#>PJM Manual for: Operating
Deleted:
Deleted: – MAAC Control Zone
Deleted: ¶
Deleted: Reliability Assurance Agreement –
Field Code Changed
Deleted: Capacity Obligations (M-18)
Deleted: Load Data Systems (M-19)Load D
Formatted
Formatted
Deleted: PJM Reserve Requirements (M-20)
Field Code Changed
Formatted
Deleted: Rules and Procedures for
Formatted
Formatted
Comment [p1]: Is this one retired?
Deleted: <#>PJM Manual for: PJM eGADS
Formatted
Deleted: <#>¶
Formatted
Deleted: <#>PJM Manual for: PJM eCapaci
Formatted
Deleted: <#>¶
Formatted
Field Code Changed
Formatted
Formatted
Field Code Changed
Formatted
Field Code Changed
Formatted
Field Code Changed
Formatted
Field Code Changed
Deleted:)
Formatted
Field Code Changed
Deleted: s
Deleted: ¶
Deleted: Because w...e believe that explain
Deleted: 2007
Deleted: 2009
Deleted: 15...6, Effective Date: 06/01/2007



- A table of contents that lists two levels of subheadings within each of the sections
- An approval page that lists the required approvals and a brief outline of the current revision
- Sections containing the specific guidelines, requirements, or procedures including PJM actions and PJM Member actions
- A section at the end detailing all previous revisions of the PJM Manual

Deleted: 2007
Deleted: 2009
Deleted: 15
Deleted: 06/01/2007



Section 1: Acronyms

1.1 Acronym Listing

AH	Available Hours
EAF	Equivalent Availability Factor
EEFOR _D	Effective Equivalent Demand Forced Outage Rate
EEI	Edison Electric Institute
EFOF	Equivalent Forced Outage Factor
EFOH	Equivalent Full Forced Outage Hours
EFOR _D	Equivalent Demand Forced Outage Rate
EFPOH	Equivalent Forced Partial Outage Hours
EMOF	Equivalent Maintenance Outage Factor
EMOH	Equivalent Full Maintenance Outage Hours
EMPOH	Equivalent Maintenance Partial Outage Hours
EPOEF	Equivalent Planned Outage Extension Factor
EPOF	Equivalent Planned Outage Factor
EPOH	Equivalent Full Planned Outage Hours
EPPOH	Equivalent Planned Partial Outage Hours
f_f	full f-factor
FOH	Full Forced Outage Hours
FOR	Forced Outage Rate
f_p	partial f-factor
FPOH	Forced Partial Outage Hours
GADS	Generator Availability Data System
GEBGE	General Electric, Baltimore Gas & Electric Reliability Program

Deleted: ing

Deleted: 2007

Deleted: 2009

Deleted: 0}

Formatted: Position: Horizontal: 7.45", Relative to: Page, Vertical: 0", Relative to: Paragraph

Deleted: 15

Deleted:

Deleted:



GORP Generator Outage Rate Program - This is a retired legacy program that has been replaced by an eGADS report entitled GORP.

GUSOUT Synonym for GORP

IEEE Institute of Electrical and Electronic Engineers

RAAS Resource Adequacy Analysis Subcommittee

MOF Maintenance Outage Factor

MOH Full Maintenance Outage Hours

MPOH Maintenance Partial Outage Hours

NERC North American Electric Reliability Council

OAF Operating Availability Factor

OC PJM Operating Committee

PC PJM Planning Committee

PH Period Hours

POF Planned Outage Factor

POH Full Planned Outage Hours

PPOH Planned Partial Outage Hours

PRISM Probabilistic Reliability Index Study Model

RSH Reserve Shutdown Hours

SH Service Hours

SOF Scheduled Outage Factor

UOH Unplanned Outage Hours

Deleted: GUS

Deleted: PJM Generator Unavailability Subcommittee

Deleted: L&CS

Deleted: PJM Load and Capacity

Deleted: 2007

Deleted: 2009

Deleted: 15

Deleted: 06/01/2007



Section 2: Definitions

2.1 Definitions

Available Hours	The time a unit is capable of producing energy, regardless of its capacity level.
<u>Deactivated Shutdown</u>	<u>The classification of a unit that is unavailable for service for an extended period of time for reasons not related to the equipment.</u>
Demand Hours	The time interval each day on a particular system in which there is a heavy demand for electricity. For PJM, it is the time period beginning 8:00:01 and ending 22:00:00, inclusive.
Effective Equivalent Demand Forced Outage Rate	The forced outage rate used for reliability and reserve margin calculations. (Refer to Equation 8.)
EPOEF	The ratio of EPOF (with SE's included) to EPOF (with SE's excluded).
Equivalent Availability Factor	<u>The fraction of a given operating period in which a generating unit is available without any outages or equipment deratings.</u> (Refer to Equation 7.)
Equivalent Demand Forced Outage Rate	The portion of time a unit is in demand, but is unavailable due to a forced outage. (Refer to Equation 2.)
Equivalent Forced Outage Factor	<u>The fraction of a given operating period in which a generating unit is not available due to forced outages and deratings.</u> (Refer to Equation 3.)
Equivalent Maintenance Outage Factor	<u>The fraction of a given operating period in which a generating unit is not available due to maintenance outages and maintenance deratings.</u> (Refer to Equation 4.)
Equivalent Outage Hours	The number of hours a unit was involved in an outage, expressed as equivalent hours of full outage at its <u>monthly</u> net dependable capacity. Equivalent hours can be calculated for forced, maintenance, or planned outages. (Refer to Equation 1.)
Equivalent Planned Outage Factor	<u>The fraction of a given operating period in which a generating unit is not available due to planned outages and planned deratings.</u> (Refer to Equation 5.)

Deleted: The portion of time a unit is available to operate, recognizing equivalent partial outage time.

Deleted: The portion of time a unit is unavailable due to forced outages.

Deleted: The portion of time a unit is unavailable due to maintenance outages.

Deleted: maximum

Deleted: Overlapping partial outage hours are not permitted in PJM outage rate calculations and overlaps are eliminated according to an outage type hierarchy.

Deleted: The portion of time a unit is unavailable due to planned outages.

Deleted: 2007

Deleted: 2009

Deleted: 0}

Formatted: Position: Horizontal: 7.45", Relative to: Page, Vertical: 0", Relative to: Paragraph

Deleted: 15

Deleted:

Deleted:



Equivalent Scheduled Outage Factor	The planned outage rate used for reliability and reserve margin calculations. (Refer to Equation 9.)
f-factor	Factors which have been adopted by PJM to scale the total number of forced outage hours to reflect those which occur during demand hours. Separate factors exist to adjust full (f_f) and partial (f_p) outage hours. (Refer to Equation 10.)
Forced Outage	An outage <u>that results in the immediate de-rating or unavailability of a generating unit due to a failure</u> that cannot be postponed beyond the end of the next weekend.
Future Unit	A unit to be placed in service at some future time, as indicated in a forecast installed capacity schedule.
<u>GORP</u>	<u>Generator Outage Rate Program – This is a retired legacy program that has been replaced by an eGADS report entitled GORP.</u>
Immature Unit	A unit having between zero and five full calendar years of operating experience <u>for reliability calculations.</u>
Inactive <u>Reserve</u>	The classification of a unit which is unavailable for <u>service, but can be brought back into service in a relatively short period of time, typically measured in days. The PJM eGADS system requires that an IR event be a minimum of 3 months.</u>
Maintenance Outage	<u>The scheduled removal from service, in whole or in part, of a generating unit in order to perform necessary repairs on specific components of the facility</u> that can be postponed beyond the end of the next weekend, but requires the unit be removed before the next planned outage.
Mature Unit	A unit having at least five full calendar years of operating experience
Mothballed <u>v</u>	<u>The classification of a unit that is unavailable for service, but can be brought back into service with appropriate amount of notification, typically weeks or months. The PJM eGADS system requires that a MB event be a minimum of 6 months. A detailed explanation of the mothballed procedure can be found in PJM Manual 14D, Section 9.</u>

Deleted: GORP

Deleted: Generator Outage Rate Program

Deleted: Status

Deleted: an extended period of time because of its removal from both operating service and installed capacity for either economic or non-equipment related reasons.

Deleted: An outage

Deleted: Unit

Deleted: A unit placed on inactive status.

Deleted: 2007

Deleted: 2009

Deleted: 15

Deleted: 06/01/2007



Non-curtailing Outage	The removal from service of spare or redundant equipment (i.e., major components or entire systems) for repairs which causes no unit outage or capacity reduction.
Operating Availability Factor	The portion of time a unit is available to operate.
Period Hours	The total clock time in the period of concern.
Planned Outage	<u>The scheduled removal from service, in whole or in part, of a generating unit for inspection, maintenance or repair with approval of PJM.</u>
Reserve Shutdown Hours	The time a unit is available for service but not dispatched due to economics or other reasons.
<u>Retired</u>	<u>The classification of a unit that is unavailable for service and not expected to return to service in the future. A detailed explanation of the retirement procedure can be found in PJM Manual 14D, Section 9.</u>
Service Hours	The time a unit is electrically connected to the system.
Variance	A measure of the variability of a unit's partial forced outages which is used in reserve margin calculations.

Deleted: An outage of predetermined length that is scheduled well in advance of its occurrence. The outage must be included in a regularly issued maintenance schedule at least one month prior to the starting date of the outage; i.e., the outage must appear in two consecutive issues of the PJM Unit Maintenance Schedule prior to starting the outage.

Deleted: Planning Period

Deleted: The continuous time period beginning 00:00: 01 on June 1 of a given year and ending 24:00: 00 on May 31 of the following year.

Deleted: 2007

Deleted: 2009

Deleted: 15

Deleted: 06/01/2007



Section 3: Equations and Derivations

NOTE:

The use of these equations and derivations is dependent upon the timely reporting of Generator Availability Data System (GADS) events and performance measures. The unit EFOR_D will be 100% for any month of operation during which minimum reporting requirements are not met.

3.1 Equations

(1) Equivalent Outage Hours: The following equation is applicable to forced, maintenance and planned capacity derations.

$$E = \sum_i \left(\frac{(D_i * T_i)}{C_i} \right)$$

where:

E = equivalent outage hours,

D_i = capacity duration for outage *i*, MW,

T_i = time accumulated during outage *i*, hours, and

C_i = unit maximum net dependable capacity at the time of this outage, MW

NOTE: The capacity can change if the outage extends over 1 or more months.

(2) Equivalent Demand Forced Outage Rate:

$$EFOR_D (\%) = \left(\frac{(f_f * FOH + f_p * EFPOH)}{SH + f_f * FOH} \right) * 100\%$$

Note: EFPOH = EFOH – FOH

- Deleted: 2007
- Deleted: 2009
- Deleted: 15
- Deleted: 06/01/2007

(3) Equivalent Forced Outage Factor:

$$EFOF (\%) = \left(\frac{EFOH}{PH} \right) * 100\% = \left(\frac{FOH + EFPOH}{PH} \right) * 100\%$$

Note: EFPOH = EFOH - FOH

or

$$EFOF (\text{weeks / year}) = \left(\frac{EFOH}{PH} \right) * \left(\frac{PH}{n * 168} \right)$$

where n is the number of years of accumulated outage hours.

(4) Equivalent Maintenance Outage Factor:

$$EMOF (\%) = \left(\frac{EMOH}{PH} \right) * 100\% = \left(\frac{MOH + EMPOH}{PH} \right) * 100\%$$

Note: EMPOH = EMOH - MOH

or

$$EMOF (\text{weeks / year}) = \left(\frac{EMOH}{PH} \right) * \left(\frac{PH}{n * 168} \right)$$

where n is the number of years of accumulated outage hours.

(5) Equivalent Planned Outage Factor:

$$EPOF (\%) = \left(\frac{EPOH}{PH} \right) * 100\% = \left(\frac{POH + EPPOH}{PH} \right) * 100\%$$

Note: EPPOH = EPOH - POH

or

$$EPOF (\text{weeks / year}) = \left(\frac{EPOH}{PH} \right) * \left(\frac{PH}{n * 168} \right)$$

where n is the number of years of accumulated outage hours.

(6) Equivalent Planned Outage Extension Factor:

$$EPOEF = \left(\frac{EPOF (\text{w/SE included})}{EPOF (\text{w/SE excluded})} \right)$$

(7) Equivalent Availability Factor:

$$EAF (\%) = \left(\frac{AH - \sum (EFPOH + EMPOH + EPPOH)}{PH} \right) * 100\%$$

Deleted: 2007
Deleted: 2009
Deleted: 15
Deleted: 06/01/2007



(8) Effective Equivalent Demand Forced Outage Rate:⁽¹⁾

$$EEFOR_D (\%) = EFOR_D (\%) + \left(\frac{1}{4}\right) * EMOF (\%)$$

(9) Equivalent Scheduled Outage Factor:⁽¹⁾

The equivalent scheduled outage factor can be expressed in either % or weeks/year using the equation:

$$ESOF = EPOF + \left(\frac{3}{4}\right) * EMOF$$

(1) Since PRISM can only accommodate two outage rates, the maintenance outage factor must be allocated to one, or both, of these rates. A rationale for proportioning it as shown is contained in the document "Report on the Study of Load Models and Reliability Program Features," Section I - GEBGE Options, (Random Maintenance), issued March, 1972 by the PJM Capacity and Transmission Planning Subcommittee. The original decision, presumably made by the PJM Planning and Engineering Committee, predates the indicated report.

(10) f-factors:^(2,3)

$$f_f = \left(\frac{1/r + 1/T}{1/r + 1/T + 1/D} \right)$$

where:

$$r = \text{average forced outage duration} = \frac{FOH}{(\text{number of forced outages})}$$

$$T = \text{average time between calls for a unit to run} = \frac{RSH}{(\text{number of attempted starts})}$$

$$D = \text{average run time} = \frac{SH}{(\text{number of successful starts})}$$

and

$$f_p = \left(\frac{SH}{AH} \right)$$

(2) The full f-factor was adopted for use by PJM with the acceptance of the "Report on Generating Unit Outage Definitions" issued in November, 1972 by the PJM Operating and P&E Committees. Refer to Section V, Item A, for the derivation of the full f-factor.

- Deleted: 2007
- Deleted: 2009
- Deleted: 15
- Deleted: 06/01/2007



- (3) The current definition of the partial f-factor was proposed by the Generator Unavailability Subcommittee, and approved for use by the Planning and Engineering Committee at its 260th meeting held March 8, 1982.

3.1.1 Data for Units with Five Full Calendar Years of Operating Experience

- (1) Individual Unit Effective Equivalent Demand Forced Outage Rate Calculation:

Included in the Effective Equivalent Demand Forced Outage Rate (EEFOR_D) calculation is the Equivalent Demand Forced outage rate (EFOR_D). Class Average Outage Rates for EFOR_D will be used for any unit for which sufficient GADS data is not available. Class Average Outage Rates are posted on the PJM web site at <http://www.pjm.com/planning/res-adequacy/resource-reports.html>.

- a. **Mature Unit:** The effective equivalent demand forced outage rate (%) of a mature unit is determined based on the latest five full calendar years of operating experience. It is calculated by adding 25% of the equivalent maintenance outage factor (%) to the equivalent demand forced outage rate (with f-factor). The five-year cumulative statistics are to be taken directly from the GORP report which has scheduled extensions included, unless manual adjustments are necessary.
- b. **Mothballed Status:** The classification of a unit which is unavailable for an extended period of time (minimum 6 months) because of its removal from operating service for either economic or non-equipment related reasons. For a unit to return from mothball status it must be succeeded by a planned or maintenance event in which repairs are made in order to allow it to return to service.
- c. **Combined Cycle Conversion of Existing CTs:** Combined Cycle units created by adding heat recovery boilers and steam turbines to existing combustion turbines will use Class Average Outage Rates until the combined cycle unit has mature operating history unless granted an exception.

- (2) Capacity Variance Calculation:

- a. **Mature Unit:** The capacity variance (MW2) of a mature unit is calculated using the procedure given in Item E: Capacity Variance Calculation Procedure for Existing Units. This information is to be taken directly from the appropriate GORP report and used, unless manual adjustments are required.
- a. **Mothballed Status:** The classification of a unit which is unavailable for an extended period of time (minimum 6 months) because of its removal from operating service for either economic or non-equipment related reasons. For a unit to return from mothball status it must be succeeded by a planned or maintenance event in which repairs are made in order to allow it to return to service.
- b. **Combined Cycle Conversion of Existing CTs:** Combined Cycle units created by adding heat recovery boilers and steam turbines to existing combustion turbines will use the following variance formula until the combined cycle unit has mature operating history unless granted an exception.

Formatted: No bullets or numbering

Deleted:

Deleted: output

Deleted: Unit

Deleted: Currently, a mothballed unit is treated as a Planned Outage until it is reactivated and included in the company's installed capacity.

Formatted: Numbered + Level: 1 + Numbering Style: a, b, c, ... + Start at: 1 + Alignment: Left + Aligned at: 0.55" + Tab after: 0.8" + Indent at: 0.8"

Deleted: output

Deleted: Unit

Formatted: Font: Bold

Deleted: Currently a mothballed unit is treated as a Planned Outage until it is reactivated and included in the company's installed capacity.

Formatted: Font: Bold

Deleted: <#>¶

Formatted: Font: Bold

Formatted: Font: Bold

Deleted: 2007

Deleted: 2009

Deleted: 15

Deleted: 06/01/2007

$$V = MW^2 * (1 - EEFOR_D) * EEFOR_D$$

(3) Scheduled Outage Data Calculation:

- a. **Mature Unit:** The scheduled outage data of a mature unit is calculated based on the latest five full calendar years of operating experience. Ten years of scheduled outage weeks are determined for each unit by multiplying the forecast maintenance weeks by the EPOEF (equation 6) and adding to each 75% of the EMOF (weeks/year). The five-year cumulative statistics are to be taken directly from the appropriate GORP output and used, unless manual adjustments are necessary.

Formatted: Numbered + Level: 1 +
Numbering Style: a, b, c, ... + Start at: 1 +
Alignment: Left + Aligned at: 0.55" + Tab
after: 0.8" + Indent at: 0.8"

3.1.2 Data for Units with Less Than Five Full Calendar Years of Operating Experience and Future Units

(1) Individual Unit Effective Equivalent Demand Forced Outage Rate Calculation:

Included in the Effective Equivalent Demand Forced Outage Rate (EEFOR_D) calculation is the Equivalent Demand Forced outage rate (EFOR_D).

Class Average values for EFOR_D will be used for any unit for which sufficient GADS data is not available.

- a. **Immature Unit:** The effective equivalent demand forced outage rate of an immature unit is the weighted combination of its historical and class-average rates (i.e., Class Average Outage Rates). For example, the rate for a unit with 'n' full calendar years of operating experience is:

Formatted: Numbered + Level: 1 +
Numbering Style: a, b, c, ... + Start at: 1 +
Alignment: Left + Aligned at: 0.55" + Tab
after: 0.8" + Indent at: 0.8"

$$EEFOR_D (\%) = \left(\frac{n * EEFOR_D (\%, historical) + (5 - n) * EEFOR_D (\%, Class)}{5} \right)$$

where EEFOR_D (% , historical) must be manually calculated using Equations 2, 4 and 8 given in Section 3.

- b. **Future Unit:** The effective equivalent demand forced outage rate (%) of a future unit is the class-average rate for its size and type indicated in Class Average values.
- c. **Combined Cycle Conversion of Existing CTs:** Combined Cycle units created by adding heat recovery boilers and steam turbines to existing combustion turbines will use Table III class average rates until the combined cycle unit has mature operating history unless granted an exception.

Formatted: No bullets or numbering

(2) Capacity Variance Calculation:

- a. **Immature Unit:** The forced outage capacity variance of an immature unit is the weighted combination of its historical and future unit values. For example, the variance for a unit with 'n' full calendar years of operating experience is:

Formatted: Numbered + Level: 1 +
Numbering Style: a, b, c, ... + Start at: 1 +
Alignment: Left + Aligned at: 0.55" + Tab
after: 0.8" + Indent at: 0.8"

Deleted: 2007

Deleted: 2009

Deleted: 15

Deleted: 06/01/2007

$$\sigma^2(MW^2) = \left(\frac{n * V_h(MW^2, historical) + (5 - n) * V_f(MW^2, future)}{5} \right)$$

where V_h is calculated using the procedure given in Section V, Item E and V_f is the future unit variance appropriate for the unit's size and type indicated in the Class Average Outage Rates of this report.

- b. **Future Unit:** The capacity variance (MW^2) of a future unit is the value appropriate for the unit's size and type indicated in the Class Average Outage Rates of this report.
- c. **Combined Cycle Conversion of Existing CTs:** Combined Cycle units created by adding heat recovery boilers and steam turbines to existing combustion turbines will use the following variance formula until the combined cycle unit has mature operating history unless granted an exception.

$$V = MW^2 * (1 - EFOR_D) * EFOR_D$$

(3) Scheduled Outage Data:

- a. **Immature Unit:** The scheduled outage data for an immature unit is comprised of the following components:

- The equivalent planned outage extension factor (EPOEF);
- The equivalent maintenance outage factor (EMOF) in weeks per year;
- Years of service; and

The yearly calculation for scheduled outage data for a unit with 'n' full calendar years of operating experience is:

$$\text{Scheduled Outage (yearly)} = \left(\frac{(((Planned Main. (wks / yr) * EPOEF) + (0.75 * EMOF (wks / yr))) * n) + [ClassAverageValue Scheduled Outage Weeks(wks/yr) + (0.75 * EMOF (ClassAverageValue))] * (5 - n)}{5} \right)$$

where EPOEF and EMOF (historical) must be manually calculated using Equations 6 and 4 respectively as given in Section 3.

- b. **Future Unit:** The scheduled outage data of future units are assigned the appropriate class-average values for scheduled outages and maintenance cycles indicated in the Class Average Outage Rates.
- c. **Combined Cycle Conversion of Existing CTs:** Combined Cycle units created by adding heat recovery boilers and steam turbines to existing combustion turbines will use the Class Average Outage Rates values until the combined cycle unit has mature operating history unless granted an exception.

Formatted: No bullets or numbering

Formatted: Numbered + Level: 1 + Numbering Style: a, b, c, ... + Start at: 1 + Alignment: Left + Aligned at: 0.55" + Tab after: 0.8" + Indent at: 0.8"

Formatted: No bullets or numbering

Deleted: 2007

Deleted: 2009

Deleted: 15

Deleted: 06/01/2007

3.2 Item A: Full f-Factor Derivation (*)

The following diagram illustrates the relationships between the potential states in which a generator can reside. The term governing the transition from one state to another is shown on the diagram adjacent to the line indicating the direction of the transition.

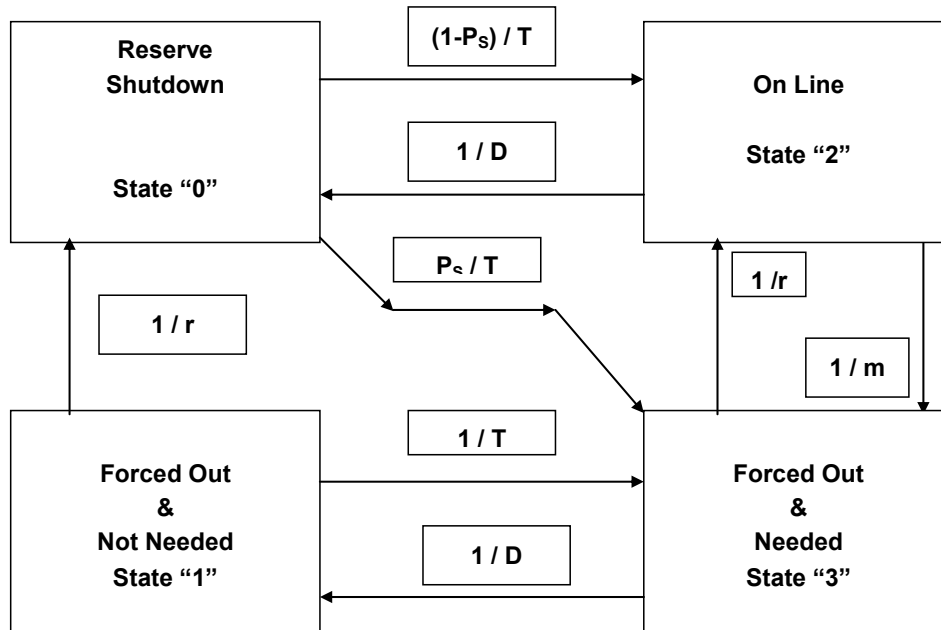


Exhibit 1: Generator States

(*) "A Four-State Model for Estimation of Outage Risk for Units in Peaking Service," Report of the IEEE Task Group on Models for Peaking Service Units, Application of Probability Methods Subcommittee, IEEE Transactions on Power Apparatus and Systems, March/April 1972.

Terms:

r = average forced outage duration

T = average time between calls for the unit to run

D = average run time during periods of demand

m = average run time between forced outages

P_S = probability of a start failure when the unit is called to run

Deleted: 2007
Deleted: 2009
Deleted: 15
Deleted: 06/01/2007

On page 621 of the referenced IEEE paper, the f-factor was defined for use as a mathematical trick to permit the substitution of known quantities for unknown quantities in the equation expressing the probability that a unit was unavailable during a demand period (equation 15). The known quantities were P_2 (the probability of being in service during a demand period; i.e., state 2) and $P_1 + P_3$ (the probabilities of being forced out during a demand period; i.e., states 1 and 3). Equation 15 is given as

$$P = \frac{P_3}{(P_2 + P_3)}$$

Define the f-factor as $f = P_3 / (P_1 + P_3)$ and multiply both sides by the term $(P_1 + P_3)$ to yield

$$P_3 = f * (P_1 + P_3)$$

Now, substitute this equation into equation 15 to eliminate the lone P_3 term

$$P = \frac{f * (P_1 + P_3)}{P_2 + f * (P_1 + P_3)}$$

The known quantities of P_2 and $P_1 + P_3$, expressed in hours, are

$$P_2 = \frac{SH}{(AH + FOH)}$$

and

$$P_1 + P_3 = \frac{FOH}{(AH + FOH)}$$

Substituting these equations into the modified equation 15 given above yields

$$P = \frac{f * FOH}{SH + f * FOH}$$

from which we can see that the f-factor weights the forced outage hours to reflect only that portion which occur during periods of demand.

Because we still don't know how to separately define P_3 , we need to redefine the f-factor in terms of data readily available from recorded outage statistics. Start by defining the frequency of being in state 1 as

$$\begin{aligned} F_1 &= P_1 * \text{rate of departure from state 1} \\ &= P_1 * \left(\frac{1}{r} + \frac{1}{T} \right) \end{aligned}$$

This can also be expressed as

Deleted: 2007
Deleted: 2009
Deleted: 15
Deleted: 06/01/2007

$$F_1 = P_3 * \text{rate of entry from state 3}$$
$$= P_3 * \left(\frac{I}{D}\right)$$

Equating these two expressions and solving for P_1 yields

$$P_1 = P_3 * \left(\frac{\frac{I}{D}}{\frac{I}{r} + \frac{I}{T}}\right)$$

Substituting this equation into the f-factor definition yields the expression

$$f_f = \frac{\frac{I}{r} + \frac{I}{T}}{\frac{I}{r} + \frac{I}{T} + \frac{I}{D}}$$

which can be determined from the outage data statistics. This factor is designated as the full f-factor (f_f) because it is used to weight the full forced outage hours.

Deleted: 2007
Deleted: 2009
Deleted: 15
Deleted: 06/01/2007

3.3 Item B: Partial f-Factor Derivation

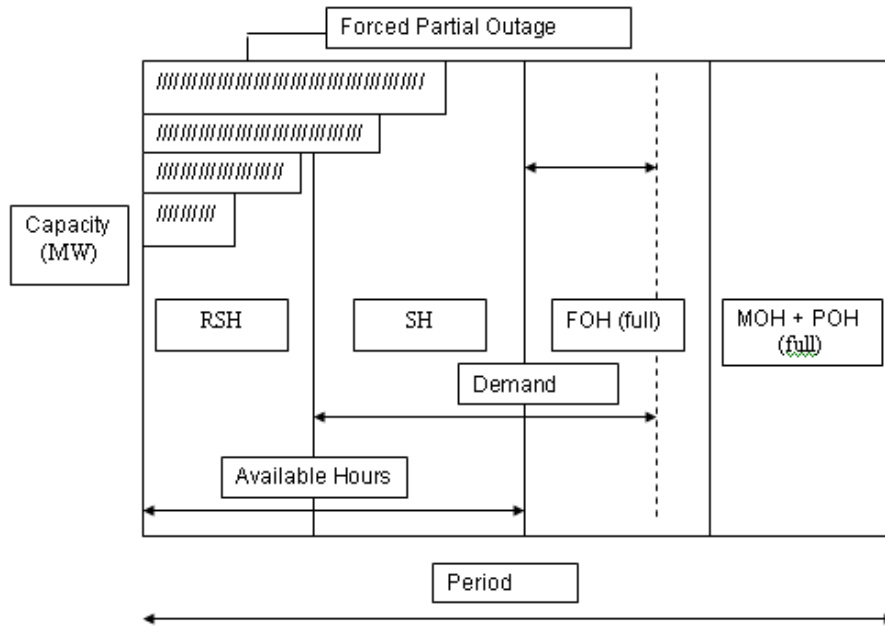


Exhibit 2: Partial f-Factor Time Period

The partial f-factor is a measure of the equivalent full forced outage hours that occur during times of demand. Theoretically, the partial f-factor is the ratio of the equivalent forced partial outage hours occurring during demand periods to the total equivalent forced partial outage hours. Assuming that the partial outages are distributed similarly during service hours and reserve shutdown hours, then the partial f-factor can be expressed as the ratio of service hours to the summation of service and reserve shutdown hours. Since available hours equals the summation of service and reserve shutdown hours, the partial f-factor can be expressed as the ratio of service hours to available hours, or

$$f_p = \frac{SH}{AH}$$

- Deleted: 2007
- Deleted: 2009
- Deleted: 15
- Deleted: 06/01/2007

3.4 Item C: Modified Two-State Model for Reliability Calculations

The standard two-state model of a generator considers the unit as being either fully available or fully unavailable. The modified two-state model is a better representation for reliability calculations because it considers the distribution of outage states possible for a generator. The result of using the modified two-state generator availability model is a reduction in the amount of reserve capacity required to maintain a reliability index of 10 years per day, as compared to the reserve requirement determined using the standard model.

The standard two-state model calculates the mean available capacity as

$$\mu = (1 - EEFOR_D) * C$$

where:

μ = mean capacity, MW

C = unit's net summer installed capacity, MW, and

$EEFOR_D$ = unit's effective equivalent demand forced outage rate, per - unit

The implied capacity variance about the mean with the standard two-state model is

$$\sigma^2 = (1 - EEFOR_D) * EEFOR_D * C^2$$

where:

σ^2 = variance, MW²

This is the maximum variance that can be experienced about the mean with the given effective equivalent demand forced outage rate. Any representation of partial outage states will tend to lower the variance.

The modified two-state model preserves both the mean and the variance of the original forced outage distribution by simultaneously solving the two-state mean and variance equations for unit capacity and effective equivalent demand forced outage rate using the two-state mean and variance values. The resulting modified two-state equations are:

$$C' = \frac{\mu}{1 - EEFOR_D'}$$

and

$$EEFOR_D' = \frac{\sigma^2}{\mu^2 + \sigma^2}$$

where:

C' = modified two - state unit net capacity, MW, and

Deleted: 2007
Deleted: 2009
Deleted: 15
Deleted: 06/01/2007



$$EEFOR_D' = \text{modified two-state } EEFOR_D, \text{ per-unit}$$

3.5 Item D: Rules for Consistency of Generator Outage Rate Calculations*

- (1) Any errors or inconsistencies found in the PJM Outage Data History File must be corrected.
 - a. All revisions to outage rates, for reasons of data integrity, must be accomplished by revising the PJM Outage Data History File.
- (2) Any outages due to natural disasters (e.g., 1972 Agnes Flood), which PJM determines to have a low probability of recurrence, can be eliminated from the outage history when calculating outage rates for use in forecasting. These special events are recorded in the GORP modification file.

3.6 Item E: Capacity Variance Calculation Procedure for Existing Units

The capacity variance is one of the inputs to the PRISM program which is used to determine the PJM capacity reserve requirement. Theoretically, the capacity variance of a unit is calculated using the equations

$$\mu = \sum_{i=1}^n (C_i * P_i)$$

$$C_i = (1 - D_i) * C$$

and

$$\sigma^2 = \sum_{i=1}^n (C_i - \mu)^2 * P_i$$

where:

μ = mean, MW,

n = number of states,

C_i = capacity available at state i , MW,

P_i = probability of being in (i.e., the outage rate for) state i , per-unit

D_i = per-unit capacity deration at state i ,

* These rules were formulated by the Generator Unavailability Subcommittee, approved by the PJM Planning and Engineering Committee at its November, 1974 (172nd) meeting, and published in the December, 1974 GUS report to P&E titled "Forced Outage Rates and Unavailable Capability Due to Planned and Maintenance Outages for the PJM Supplemental Agreement."

Deleted: 2007
Deleted: 2009
Deleted: 15
Deleted: 06/01/2007

$C = \text{net summer installed capacity, MW, and}$

$\sigma^2 = \text{variance, (MW)}^2$

However, to utilize the information readily available in the outage statistics, a somewhat modified approach has been taken. For PJM reliability calculations, the effective equivalent demand forced outage rate represents the mean per-unit unavailability. Therefore, the mean capacity can be expressed as

$$\mu = (1 - EEFOR_D) * C$$

Since the EEFOR includes 25% of the equivalent maintenance outage time, it is a measure of the unit's unavailability due to all unplanned outages. Therefore, the partial outage state probabilities must be based on the total unplanned outage time spent in each state. A maintenance f-factor has been introduced to transform the maintenance outage time from a period hour to a demand hour basis so it can be added to the forced outage time. The maintenance f-factor, which also included the 25% proportioning, is defined as

$$f_m = \frac{SH + f_f * FOH}{4 * PH} = \frac{DH}{4 * PH}$$

The total forced and maintenance outage time spent in each state is:

$$100\% \text{ forced out state (100\% out)} \quad H_{100} = f_f * FOH + f_m * MOH$$

$$\text{partial forced out state (i\% out)} \quad H_i = f_p * FPOH_i + f_m * MPOH_i$$

$$100\% \text{ available state (0\% out)} \quad H_0 = DH - H_{100} - \sum H_i$$

The probability of being in each state is simply the ratio of the time spent in each state to the total time, or

$$P_0 = \frac{H_0}{DH}$$

$$P_{100} = \frac{H_{100}}{DH}$$

$$P_i = \frac{H_i}{DH}$$

The individual state variances can now be calculated using the equation

$$\sigma^2 = \sum_{i=0}^{100} \left((1 - D_i) * C - \mu \right)^2 * P_i$$

where:

$D_i = \text{per - unit average unavailability of state } i,$

Deleted: 2007
Deleted: 2009
Deleted: 15
Deleted: 06/01/2007



C = unit net summer installed capacity, MW,

μ = mean capacity, MW, calculated using the unit's EEFOR

P_i = per-unit probability of being in state i

This procedure has been incorporated into the Generator Outage Rate Program (GORP) and is used to produce the information displayed in the "[Implied Capacity Variance field](#)."

Deleted: Unit Variance and Partial Outage State Report

Future Unit Variance

Variance values for future fossil and nuclear units were determined by examining the historical statistics for each unit type. A scatter diagram of the unit equivalent forced capacity C_f was plotted against the square root of variance to yield the following equations:

Fossil Steam Unit Variance

$$(V_f)^5 = 1.1 * C_f + 40$$

OR

$$V_f = (1.1 * C_f + 40)^2$$

Nuclear Unit Variance

$$(V_N)^5 = 0.8 * C_f + 140$$

OR

$$V_N = (0.8 * C_f + 140)^2$$

where:

V_f = fossil unit variance

V_N = nuclear unit variance

C_f = unit capacity X unit EEFOR_d

Variance values for future internal combustion, combined cycle and hydro units were determined using the standard two-state model calculation:

Internal Combustion, Combined Cycle and Hydro Unit Variance

$$V = (1 - EEFOR_d) * EEFOR_d * C^2$$

where:

V = Unit Variance

C = Unit Capacity

Deleted: 2007

Deleted: 2009

Deleted: 15

Deleted: 06/01/2007



Revision History

Revision 15 (06/01/07)

- Revisions for the implementation of the Reliability Pricing Model and general clean-up.

Formatted: PJM_Bulleted_Para_1, Outline numbered + Level: 1 + Numbering Style: Bullet + Aligned at: 0.3" + Tab after: 0.55" + Indent at: 0.55", Tab stops: 0.55", Left + 2", List tab

Revision 14 (06/01/05)

Updated Exhibit 1 to include new PJM Manuals.

Removed all references to the Planning Study Outage Data Report which was a report under the former Installed Capacity Accounting construct and revised commentary on derivations accordingly. Removed all reference to the Generator Unavailability Subcommittee and the PJM Class Average Outage Rates and added link to table of NERC-based Class Average values now on PJM web site

Revision 13 (05/01/04)

Changed name of Manual; removed references to Generator Unavailability Subcommittee (addressed under PJM Members Handbook); revised Class Average Outage Rate table

Revision 12 (08/23/2000)

Modified text to refer to "Class Average Outage Rates" instead of "Table III". Reviewed for compliance with RAA.

Revision 11 (06/01/99)

Removed all references to Supplemental Agreement, removed references to data and procedures no longer supported and reformatted document for publishing on the PJM website.

Revision 10 (04/01/96)

Revision 09 (11/01/94)

Revision 08 (10/01/94)

Revision 07 (07/01/94)

Revision 06 (02/01/93)

Revision 05 (09/01/92)

Revision 04 (12/01/91)

Revision 03 (03/01/87)

Revision 02 (05/01/86)

Revision 01 (02/01/85)

Revision 00 Issued (04/01/84)

- Deleted:** 2007
- Deleted:** 2009
- Deleted:** 15
- Deleted:** 06/01/2007