

***Generation Interconnection
Feasibility Study Report***

For

***PJM Generation Interconnection Request
Queue Position AC2-057***

Ridgeway - Solite 69kV

September 2017

Preface

The intent of the feasibility study is to determine a plan, with ballpark cost and construction time estimates, to connect the subject generation to the PJM network at a location specified by the Interconnection Customer. The Interconnection Customer may request the interconnection of generation as a capacity resource or as an energy-only resource. As a requirement for interconnection, the Interconnection Customer may be responsible for the cost of constructing: (1) Direct Connections, which are new facilities and/or facilities upgrades needed to connect the generator to the PJM network, and (2) Network Upgrades, which are facility additions, or upgrades to existing facilities, that are needed to maintain the reliability of the PJM system.

In some instances a generator interconnection may not be responsible for 100% of the identified network upgrade cost because other transmission network uses, e.g. another generation interconnection, may also contribute to the need for the same network reinforcement. The possibility of sharing the reinforcement costs with other projects may be identified in the feasibility study, but the actual allocation will be deferred until the impact study is performed.

The Feasibility Study estimates do not include the feasibility, cost, or time required to obtain property rights and permits for construction of the required facilities. The project developer is responsible for the right of way, real estate, and construction permit issues. For properties currently owned by Transmission Owners, the costs may be included in the study.

General

The Interconnection Customer (IC) proposes to install PJM Project #AC2-057, a 20.0 MW (13.7 MW Capacity) solar generating facility in Pittsylvania County, Virginia. The point of interconnection is to AEP's Ridgeway – Solite 69 kV section of the Ridgeway – Corning Glass 69 kV circuit (see Figure 1).

The requested in service date is December 31, 2018.

Attachment Facilities

Point of Interconnection (Ridgeway - Solite 69 kV)

To accommodate the interconnection on the Ridgeway – Solite 69 kV section of the Ridgeway – Corning Glass 69 kV circuit, a new three (3) circuit breaker 69 kV switching station physically configured in a breaker and half bus arrangement but operated as a ring-bus will be constructed (see Figure 1). Installation of associated protection and control equipment, 69 kV line risers, SCADA, and 69 kV revenue metering will also be required. AEP reserves the right to specify the final acceptable configuration considering design practices, future expansion, and compliance requirements.

New Switching Station Work:

- Construct a new three (3) circuit breaker 69 kV switching station physically configured in a breaker and half bus arrangement but operated as a ring-bus. Installation of associated protection and control equipment, 69 kV line risers, SCADA, and 69 kV revenue metering will also be required (see Figure 1).
- **Estimated Station Cost: \$3,500,000**

Direct Connection Cost Estimate

The total preliminary cost estimate for Direct Connection work is given in the following tables below.

For AEP building Direct Connection cost estimates:

Description	Total Cost
Ridgeway - Solite 69 kV T-Line Cut In	\$700,000
Total	\$700,000

Table 1

Non-Direct Connection Cost Estimate

The total preliminary cost estimate for Non-Direct Connection work is given in the following table below:

For AEP building Non-Direct Connection cost estimates:

Description	Estimated Cost
69 kV Revenue Metering	\$200,000
Upgrade line protection and controls at the Ridgeway 69 kV substation.	\$200,000
Upgrade line protection and controls at the Corning Glass 69 kV substation.	\$200,000
Total	\$600,000

Table 2

Interconnection Customer Requirements

It is understood that the IC is responsible for all costs associated with this interconnection. The cost of IC's generating plant and the costs for the line connecting the generating plant to the new proposed 69 kV switching station are not included in this report; these are assumed to be IC's responsibility.

The Generation Interconnection Agreement does not in or by itself establish a requirement for American Electric Power to provide power for consumption at the developer's facilities. A separate agreement may be reached with the local utility that provides service in the area to ensure that infrastructure is in place to meet this demand and proper metering equipment is installed. It is the responsibility of the developer to contact the local service provider to determine if a local service agreement is required.

Revenue Metering and SCADA Requirements

PJM Requirements

The Interconnection Customer will be required to install equipment necessary to provide Revenue Metering (KWH, KVARH) and real time data (KW, KVAR) for the IC's generating Resource. See PJM Manuals M-01 and M-14D, and PJM Tariff Sections 24.1 and 24.2.

AEP Requirements

The Interconnection Customer will be required to comply with all AEP Revenue Metering Requirements for Generation Interconnection Customers. The Revenue Metering Requirements may be found within the "Requirements for Connection of New Facilities or Changes to Existing Facilities Connected to the AEP Transmission System" document located at the following link:

<http://www.pjm.com/~media/planning/plan-standards/private-aep/aep-interconnection-requirements.ashx>

Network Impacts

The Queue Project AC2-057 was evaluated as a 20.0 MW (Capacity 13.7 MW) injection tapping the Ridgeway – Solite 69 kV line in the AEP area. Project AC2-057 was evaluated for compliance with applicable reliability planning criteria (PJM, NERC, NERC Regional Reliability Councils, and Transmission Owners). Project AC2-057 was studied with a commercial probability of 53%. Potential network impacts were as follows:

Summer Peak Analysis - 2020

Generator Deliverability

(Single or N-1 contingencies for the Capacity portion only of the interconnection)

None

Multiple Facility Contingency

(Double Circuit Tower Line, Fault with a Stuck Breaker, and Bus Fault contingencies for the full energy output)

None

Contribution to Previously Identified Overloads

(This project contributes to the following contingency overloads, i.e. "Network Impacts", identified for earlier generation or transmission interconnection projects in the PJM Queue)

None

Steady-State Voltage Requirements

None

Short Circuit

(Summary of impacted circuit breakers)

New circuit breakers found to be over-duty:

None

Affected System Analysis & Mitigation

LGEE Impacts:

LGEE Impacts to be determined during later study phases (as applicable).

MISO Impacts:

MISO Impacts to be determined during later study phases (as applicable).

Duke, Progress & TVA Impacts:

Duke Carolina, Progress, & TVA Impacts to be determined during later study phases (as applicable).

OVEC Impacts:

OVEC Impacts to be determined during later study phases (as applicable).

Delivery of Energy Portion of Interconnection Request

PJM also studied the delivery of the energy portion of this interconnection request. Any problems identified below are likely to result in operational restrictions to the project under study. The developer can proceed with network upgrades to eliminate the operational restriction at their discretion by submitting a Merchant Transmission Interconnection request.

Only the most severely overloaded conditions are listed. There is no guarantee of full delivery of energy for this project by fixing only the conditions listed in this section. With a Transmission Interconnection Request, a subsequent analysis will be performed, which will study all overload conditions associated with the overloaded element(s) identified.

None

New System Reinforcements

(Upgrades required to mitigate reliability criteria violations, i.e. Network Impacts, initially caused by the addition of this project generation)

None

Schedule

It is anticipated that the time between receipt of executed agreements and Commercial Operation may range from 12 to 18 months if no line work is required. If line work is required, construction time would be between 24 to 36 months after signing an interconnection agreement.

Note: The time provided between anticipated normal completion of System Impact, Facilities Studies, subsequent execution of ISA and ICSA documents, and the proposed In-Service Date is shorter than usual and may be difficult to achieve.

Conclusion

Based upon the results of this Feasibility Study, the construction of the IC's 20.0 MW (13.7 MW Capacity) solar generating facility (PJM Project #AC2-057) will require the following additional interconnection charges. This plan of service will interconnect the proposed generating facility in a manner that will provide operational reliability and flexibility to both the AEP system and the IC's generating facility.

Cost Breakdown for Point of Interconnection (Ridgeway - Solite 69 kV)		
Attachment Cost	New 69 kV Switching Station	\$3,500,000
Direct Connection Cost Estimate	Ridgeway - Solite 69 kV T-Line Cut In	\$700,000
Non-Direct Connection Cost Estimate	69 kV Revenue Metering	\$200,000
	Upgrade line protection and controls at the Ridgeway 69 kV substation.	\$200,000
	Upgrade line protection and controls at the Corning Glass 69 kV substation.	\$200,000
Total Estimated Cost for Project AC2-057		\$4,800,000

Table 3

The estimates are preliminary in nature, as they were determined without the benefit of detailed engineering studies. Final estimates will require an on-site review and coordination to determine final construction requirements.

Figure 1: Point of Interconnection (Ridgeway - Solite 69 kV)

Single Line Diagram

AC2-057 Primary Point of Interconnection

Remote stations not completely shown.

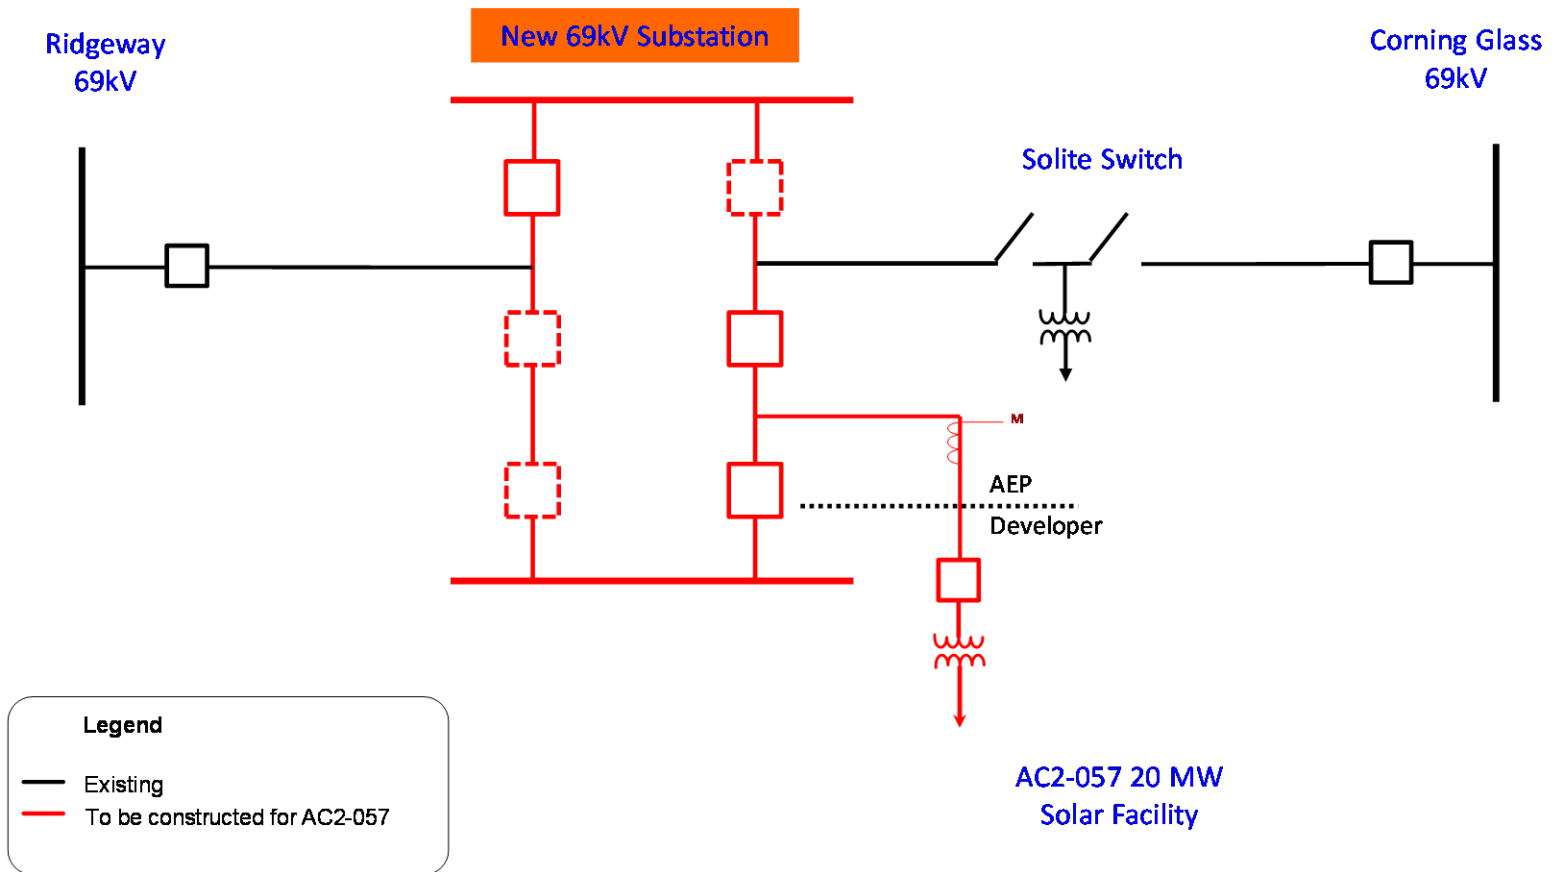


Figure 2: Primary Point of Interconnection (Ridgeway - Solite 69 kV)

