

***Generation Interconnection
System Impact Study Report***

For

***PJM Generation Interconnection Request
Queue Position AB2-015***

***Franklin 115kV
50 MW Capacity / 91 MW Energy***

June / 2017

Introduction

This System Impact Study (SIS) has been prepared in accordance with the PJM Open Access Transmission Tariff, Section 205, as well as the System Impact Study Agreement between SunPower Corporation, the Interconnection Customer (IC) and PJM Interconnection, LLC (PJM), Transmission Provider (TP). The Interconnected Transmission Owner (ITO) is Virginia Electric and Power Company (VEPCO).

Preface

The intent of the System Impact Study is to determine a plan, with approximate cost and construction time estimates, to connect the subject generation interconnection project to the PJM network at a location specified by the IC. As a requirement for interconnection, the IC may be responsible for the cost of constructing Network Upgrades, which are facility additions, or upgrades to existing facilities, that are needed to maintain the reliability of the PJM system. All facilities required for interconnection of a generation interconnection project must be designed to meet the technical specifications (on PJM web site) for the appropriate transmission owner.

In some instances an IC may not be responsible for 100% of the identified network upgrade cost because other transmission network uses, e.g. another generation interconnection or merchant transmission upgrade, may also contribute to the need for the same network reinforcement. The possibility of sharing the reinforcement costs with other projects may be identified in the Feasibility Study, but the actual allocation will be deferred until the System Impact Study is performed.

The System Impact Study estimates do not include the feasibility, cost, or time required to obtain property rights and permits for construction of the required facilities. The IC is responsible for the right of way, real estate, and construction permit issues. For properties currently owned by Transmission Owners, the costs may be included in the study.

General

The IC has proposed a solar generating facility located in Franklin, VA (Southampton County). The installed facilities will have a total capability of 91 MW with 50 MW of this output being recognized by PJM as capacity. The proposed in-service date for this project is 12/31/2018.

This study does not imply an ITO commitment to this in-service date.

Point of Interconnection

AB2-015 will interconnect with the ITO transmission system via a new three breaker ring bus switching station that connects at the Franklin 115kV substation.

Cost Summary

The AB2-015 interconnection request will be responsible for the following costs:

Description	Total Cost
Attachment Facilities	\$1,550,000
Direct Connection Network Upgrades	\$5,500,000
Non Direct Connection Network Upgrades	\$0
Allocation for New System Upgrades	\$0
Contribution for Previously Identified Upgrades	\$0
Total Costs	\$7,050,000

Attachment Facilities

Generation Substation: Install metering and associated Protection Equipment. Estimated Cost \$550,000.

Transmission: Construct approximately one span of 115 kV Attachment line between the generation substation and the existing Franklin Substation. The estimated cost for this work is \$1,000,000.

The estimated total cost of the Attachment Facilities is \$1,550,000. It is estimated to take 18-24 months to complete this work. These preliminary cost estimates are based on typical engineering costs. A more detailed engineering cost estimates are normally done when the IC provides an exact site plan location for the generation substation during the Facility Study phase. These costs do not include CIAC Tax Gross-up. The single line is shown below in Attachment 1.

Direct Connection Cost Estimate

Substation: Upgrade the existing Franklin substation to a new 115 kV Switching Substation (interconnection substation) with a three breaker ring bus. The estimated cost of this work scope is \$5,500,000.

It is estimated to take 24-36 months to complete this work.

Non-Direct Connection Cost Estimate

Remote Terminal Work: During the Facilities Study, ITO's System Protection Engineering Department will review transmission line protection as well as anti-islanding required to accommodate the new generation and interconnection substation. System Protection Engineering will determine the minimal acceptable protection requirements to reliably interconnect the proposed generating facility with the transmission system. The review is based on maintaining system reliability by reviewing ITO's protection requirements with the known transmission system configuration which includes generating facilities in the area. This review may determine that transmission line protection and communication upgrades are required at remote substations.

Interconnection Customer Requirements

ITO's Facility Interconnection Requirements as posted on PJM's website

<http://www.pjm.com/~media/planning/plan-standards/private-dominion/facility-connection-requirements1.ashx>

Voltage Ride Through Requirements - The Customer Facility shall be designed to remain in service (not trip) for voltages and times as specified for the Eastern Interconnection in Attachment 1 of NERC Reliability Standard PRC-024-1, and successor Reliability Standards, for both high and low voltage conditions, irrespective of generator size, subject to the permissive trip exceptions established in PRC-024-1 (and successor Reliability Standards).

Frequency Ride Through Requirements - The Customer Facility shall be designed to remain in service (not trip) for frequencies and times as specified in Attachment 2 of NERC Reliability Standard PRC-024-1, and successor Reliability Standards, for both high and low frequency

condition, irrespective of generator size, subject to the permissive trip exceptions established in PRC-024-1 (and successor Reliability Standards).

Reactive Power - The Generation Interconnection Customer shall design its non-synchronous Customer Facility with the ability to maintain a power factor of at least 0.95 leading to 0.95 lagging measured at the generator's terminals.

Meteorological Data Reporting Requirement - The solar generation facility shall, at a minimum, be required to provide the Transmission Provider with site-specific meteorological data including:

- Temperature (degrees Fahrenheit)
- Atmospheric pressure (hectopascals)
- Irradiance
- Forced outage data

Revenue Metering and SCADA Requirements

PJM Requirements

The Interconnection Customer will be required to install equipment necessary to provide Revenue Metering (KWH, KVARH) and real time data (KW, KVAR) for IC's generating Resource. See PJM Manuals M-01 and M-14D, and PJM Tariff Sections 24.1 and 24.2.

Interconnected Transmission Owner Requirements

Metering and SCADA/Communication equipment must meet the requirements outlined in section 3.1.6 Metering and Telecommunications of ITO's Facility Connection Requirement NERC Standard FAC-001 which is publically available at www.dom.com.

Network Impacts

The Queue Project AB2-015 was evaluated as a 91.0 MW (Capacity 50.0 MW) injection at Franklin 115 kV substation in the ITO area. Project AB2-015 was evaluated for compliance with applicable reliability planning criteria (PJM, NERC, NERC Regional Reliability Councils, and Transmission Owners). Project AB2-015 was studied with a commercial probability of 100%. Potential network impacts were as follows:

Contingency Descriptions

The following contingencies resulted in overloads:

Contingency Name	Description
LN 140_B	CONTINGENCY 'LN 140_B' OPEN BRANCH FROM BUS 921981 TO BUS 314558 CKT 1 /* AA2-088 TAP - 3BOYKINS 115.00 END
LN 208-259	CONTINGENCY 'LN 208-259' OPEN BRANCH FROM BUS 314286 TO BUS 314309 CKT 1 /* 6CHSTF A 230.00 - 6IRON208 230.00 OPEN BRANCH FROM BUS 314309 TO BUS 314338 CKT 1 /* 6IRON208 230.00 - 6SOUWEST 230.00 OPEN BUS 314309 /* ISLAND OPEN BRANCH FROM BUS 314276 TO BUS 314287 CKT 1 /* 6BASIN 230.00 - 6CHSTF B 230.00 END
LN 259	CONTINGENCY 'LN 259' OPEN BRANCH FROM BUS 314276 TO BUS 314287 CKT 1 /* 6BASIN 230.00 - 6CHSTF B 230.00 END
LN 557	CONTINGENCY 'LN 557' OPEN BRANCH FROM BUS 314214 TO BUS 314903 CKT 1 /* 6CHCKAHM 230.00 - 8CHCKAHM 500.00 OPEN BRANCH FROM BUS 314903 TO BUS 314908 CKT 1 /* 8CHCKAHM 500.00 - 8ELMONT 500.00 END
LN 563	CONTINGENCY 'LN 563' OPEN BRANCH FROM BUS 314902 TO BUS 314914 CKT 1 /* 8CARSON 500.00 - 8MDLTHAN 500.00 END
LN 576	CONTINGENCY 'LN 576' OPEN BRANCH FROM BUS 314322 TO BUS 314914 CKT 1 /* 6MDLTHAN 230.00 - 8MDLTHAN 500.00 OPEN BRANCH FROM BUS 314914 TO BUS 314918 CKT 1 /* 8MDLTHAN 500.00 - 8NO ANNA 500.00 END

Contingency Name	Description
LN 68	CONTINGENCY 'LN 68' OPEN BRANCH FROM BUS 314527 TO BUS 314536 CKT 1 /* 3HOLLAND 115.00 - 3SUFFOLK 115.00 OPEN BRANCH FROM BUS 314527 TO BUS 314539 CKT 1 /* 3HOLLAND 115.00 - 3UNCAMP 115.00 OPEN BUS 314527 /* ISLAND END

Summer Peak Analysis – 2020

Generator Deliverability

(Single or N-1 contingencies for the Capacity portion only of the interconnection)

#	Contingency		Affected Area	Facility Description	Bus		Circuit	Power Flow	Loading %		Rating		MW Contribution
	Type	Name			From	To			Initial	Final	Type	MVA	
1	N-1	LN 576	DVP - DVP	6MESSER-6CHARCTY 230 kV line	314228	314225	1	AC	99.71	100.32	ER	375	2.69
2	N-1	LN 576	DVP - DVP	6CHSTF B-6MESSER 230 kV line	314287	314228	1	AC	99.74	100.35	ER	375	2.69

Multiple Facility Contingency

(Double Circuit Tower Line, Fault with a Stuck Breaker, and Bus Fault contingencies for the full energy output).

None

Short Circuit

(Summary of impacted circuit breakers)

New circuit breakers found to be over-duty:

None

Contributions to previously identified circuit breakers found to be over-duty:

None

Contribution to Previously Identified Overloads

(This project contributes to the following contingency overloads, i.e. "Network Impacts", identified for earlier generation or transmission interconnection projects in the PJM Queue)

#	Contingency		Affected Area	Facility Description	Bus			Power Flow	Loading %		Rating		MW Contribution	Ref
	Type	Name			From	To	Cir.		Initial	Final	Type	MVA		
3	DCTL	LN 208-259	DVP - DVP	6MESSER-6CHARCTY 230 kV line	314228	314225	1	AC	102.63	103.59	LD	459	5.28	1
4	DCTL	LN 208-259	DVP - DVP	6CHSTF B-6MESSER 230 kV line	314287	314228	1	AC	102.66	103.63	LD	459	5.28	2

Steady-State Voltage Requirements

(Summary of the VAR requirements based upon the results of the steady-state voltage studies)

None

Stability and Reactive Power Requirement for Low Voltage Ride Through

(Summary of the VAR requirements based upon the results of the dynamic studies)

No mitigations required.

Tuned inverter model parameters are required to be submitted for review/re-evaluation prior to commissioning.

New System Reinforcements

(Upgrades required to mitigate reliability criteria violations, i.e. Network Impacts, initially caused by the addition of this interconnection request)

Violation #	Overloaded Facility	Upgrade Description	Network Upgrade Number	Upgrade Cost	AB2-015 Allocation
# 1	6MESSER-6CHARCTY 230 kV line	Rebuild 21.32 miles of the Chesterfield - Lakeside 230kV transmission line by 6/1/2020	b2745	Not Applicable	
# 2	6CHSTF B-6MESSER 230 kV line				
Total New Network Upgrades					\$0

Contribution to Previously Identified System Reinforcements

(Overloads initially caused by prior Queue positions with additional contribution to overloading by this project. This project may have a % allocation cost responsibility which is calculated and reported for in the Impact Study)

Violation #	Overloaded Facility	Upgrade Description	Network Upgrade Number	Upgrade Cost	AB2-015 Allocation
# 3	6MESSER-6CHARCTY 230 kV line	Rebuild 21.32 miles of the Chesterfield - Lakeside 230kV transmission line by 6/1/2020	b2745	Not Applicable	
# 4	6CHSTF B-6MESSER 230 kV line				
Total New Network Upgrades					\$0

Potential Congestion due to Local Energy Deliverability

PJM also studied the delivery of the energy portion of this interconnection request. Any problems identified below are likely to result in operational restrictions to the project under study. The IC can proceed with network upgrades to eliminate the operational restriction at their discretion by submitting a Merchant Transmission Interconnection request.

Note: Only the most severely overloaded conditions are listed below. There is no guarantee of full delivery of energy for this interconnection request by addressing only the conditions listed in this section. With a Transmission Interconnection Request, a subsequent analysis will be performed which shall study all overload conditions associated with the overloaded element(s) identified.

#	Contingency		Affected Area	Facility Description	Bus			Power Flow	Loading %		Rating		MW Contribution
	Type	Name			From	To	Circuit		Initial	Final	Type	MVA	
5	N-1	LN 557	DVP - DVP	6SKIFF CREEK-6KINGS M 230 kV line	314209	314386	1	AC	66.97	67.98	ER	442	5.24
6	N-1	LN 557	DVP - DVP	6CHARCTY-6LAKESD 230 kV line	314225	314227	1	AC	85.02	86.15	ER	375	5.05

Contingency			Affected Area	Facility Description	Bus		Circuit	Power Flow	Loading %		Rating		MW Contribution
#	Type	Name			From	To			Initial	Final	Type	MVA	
7	N-1	LN 259	DVP - DVP	6MESSER-6CHARCTY 230 kV line	314228	314225	1	AC	102.39	103.49	ER	375	4.91
8	N-1	LN 259	DVP - DVP	6CHSTF B-6MESSER 230 kV line	314287	314228	1	AC	102.42	103.52	ER	375	4.91
9	N-1	LN 563	DVP - DVP	6CHSTF B-6BASIN 230 kV line	314287	314276	1	AC	99.82	101.02	ER	449	6.37
10	N-1	LN 140_B	DVP - DVP	3FRNKLN-3UNCAMP 115 kV line	314524	314539	1	AC	50.32	90.86	ER	225	90.97
11	N-1	LN 140_B	DVP - DVP	3HOLLAND-3SUFFOLK 115 kV line	314527	314536	1	AC	52.67	92.47	ER	225	90.97
12	N-1	LN 140_B	DVP - DVP	3UNCAMP-3HOLLAND 115 kV line	314539	314527	1	AC	61.52	101.28	ER	225	90.97
13	N-1	LN 68	DVP - DVP	3BOYKINS-3MURPHYS 115 kV line	314558	314589	1	AC	85.56	111.79	ER	117	32.02
14	N-1	LN 68	DVP - DVP	3MAPLETN-3TUNIS 115 kV line	314580	314617	1	AC	70.62	96.87	ER	117	32.01
15	N-1	LN 68	DVP - DVP	3MURPHYS-3MAPLETN 115 kV line	314589	314580	1	AC	74.78	101.04	ER	117	32.01
16	N-1	LN 576	DVP - DVP	8ELMONT-8LDYSMTH 500 kV line	314908	314911	1	AC	87.19	88.11	ER	2442	26.29
17	N-1	LN 68	DVP - DVP	AA2-088 TAP-3BOYKINS 115 kV line	921981	314558	1	AC	60.34	99.25	ER	225	90.97

Light Load Analysis in 2020

Not required

ITO Analysis

ITO assessed the impact of the proposed Queue Project #AB2-015 interconnection of 91 MW of energy (Capacity 50 MW) for compliance with reliability criteria on ITO's Transmission System. The system was assessed using the summer 2020 RTEP case provided to ITO by PJM. When performing a generation analysis, ITO's main analysis will be load flow study results under single contingency and multiple facility contingency (both normal and stressed system conditions). ITO Criteria considers a transmission facility overloaded if it exceeds 94% of its emergency rating under normal and stressed system conditions. A full listing of ITO's Planning Criteria and interconnection requirements can be found in the ITO's Facility Connection Requirements which are publicly available at: <http://www.dom.com>.

The results of these studies evaluate the system under a limited set of operating conditions and do not guarantee the full delivery of the capacity and associated energy of this proposed interconnection request under all operating conditions. NERC Planning and Operating Reliability Criteria allow for the re-dispatch of generating units to resolve projected and actual deficiencies in real time and planning studies. Specifically NERC Category C Contingency Conditions (Bus Fault, Tower Line, N-1-1, and Stuck Breaker scenarios) allow for re-dispatch of generating units to resolve potential reliability deficiencies. For ITO Planning Criteria the re-dispatch of generating units for these contingency conditions is allowed as long as the projected loading does not exceed 100% of a facility Load Dump Rating.

As part of its generation impact analysis ITO routinely evaluates the impact that a proposed new generation resource will have under maximum generation conditions, stress system conditions and import/export system conditions (greater than 20 MW). The results of these studies are discussed in more detail below.

Category B Analysis (Single Contingency):

- System Normal – Same as PJM Analysis
- Critical System Condition (No Surry 230 kV Unit) – Same as PJM Analysis.

Category C Analysis: (Multiple Facility Contingency)

- Bus Fault - No deficiencies identified
- Line Stuck Breaker - No deficiencies identified
- Tower Line – No deficiencies identified

As part of its generation impact analysis ITO routinely evaluates the impact that a proposed new generation resource (greater than 20 MW) will have under maximum generation conditions, stress system conditions and import/export system conditions. The results of these studies are discussed in Table A and B below.

Table A: Import Study Results

Import Study Results			
Area	Summer 2020	Summer 2020 with AB2-015	Limiting Element
AEP	2000+	2000+	None
APS	2000+	2000+	None
CPL	2000+	2000+	None
PJM	2000+	2000+	None

Table B: Export Study Results

Export Study Results			
Area	Summer 2020	Summer 2020 with AB2-015	Limiting Element
AEP	2000+	2000+	None
APS	2000+	2000+	None
CPL	2000+	2000+	None
PJM	2000+	2000+	None

ITO's Planning Criteria indicates a need to have approximately 2000 MW of import and export capability. The results of these import and export studies indicate that the proposed AB2-015 (Transfer) will not impact ITO's import or export capability


Affected System Analysis & Mitigation

Duke Energy:

None identified

Attachment 1.

System Configuration

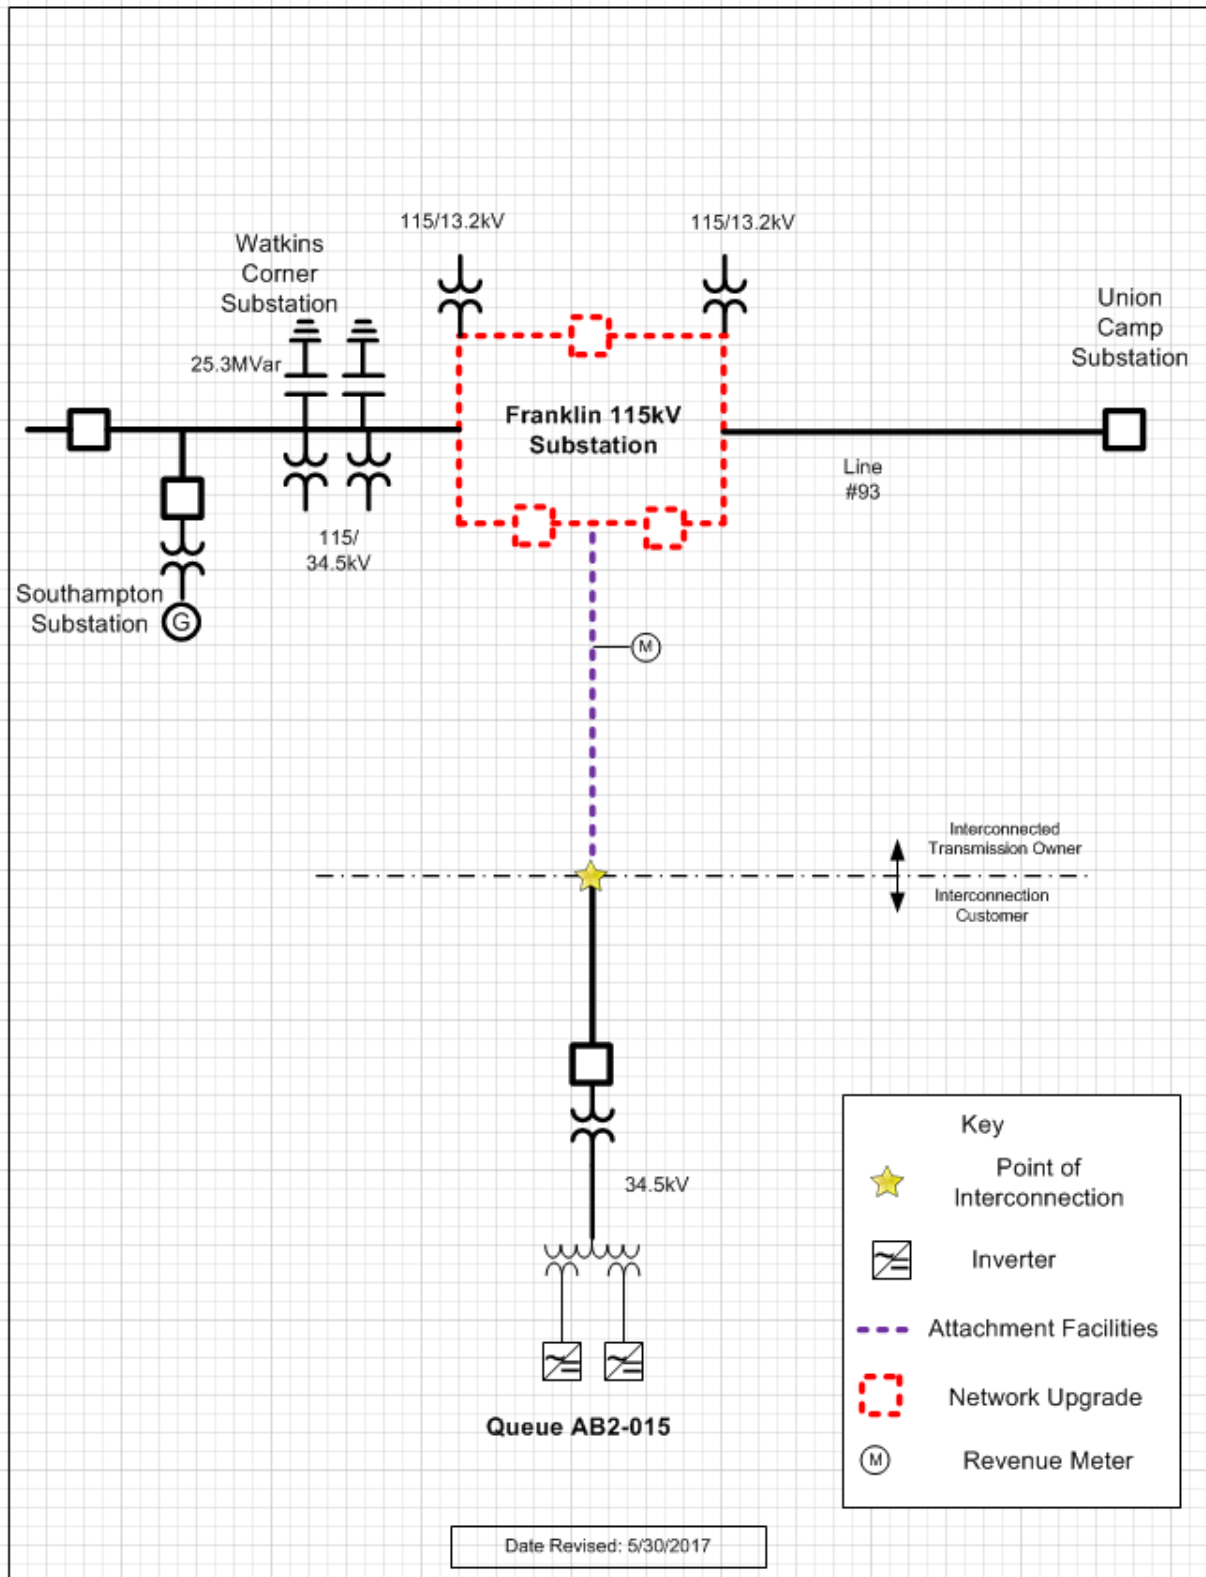

Appendices

The following appendices contain additional information about each flowgate presented in the body of the report. For each appendix, a description of the flowgate and its contingency was included for convenience. However, the intent of the appendix section is to provide more information on which projects/generators have contributions to the flowgate in question. Although this information is not used "as is" for cost allocation purposes, it can be used to gage other generators impact.

It should be noted the generator contributions presented in the appendices sections are full contributions, whereas in the body of the report, those contributions take into consideration the commercial probability of each project.

Appendix 1

(DVP - DVP) The 6MESSER-6CHARCTY 230 kV line (from bus 314228 to bus 314225 ckt 1) loads from 102.63% to 103.59% (AC power flow) of its load dump rating (459 MVA) for the tower line contingency outage of 'LN 208-259'. This project contributes approximately 5.28 MW to the thermal violation.

CONTINGENCY 'LN 208-259'

OPEN BRANCH FROM BUS 314286 TO BUS 314309 CKT 1 /* 6CHSTF A
230.00 - 6IRON208 230.00

OPEN BRANCH FROM BUS 314309 TO BUS 314338 CKT 1 /* 6IRON208
230.00 - 6SOUWEST 230.00

OPEN BUS 314309 /* ISLAND

OPEN BRANCH FROM BUS 314276 TO BUS 314287 CKT 1 /* 6BASIN 230.00 -
6CHSTF B 230.00

END

Bus Number	Bus Name	Full Contribution
315065	1CHESTF6	39.27
315077	1HOPHCF1	2.28
315078	1HOPHCF2	2.28
315079	1HOPHCF3	2.28
315080	1HOPHCF4	3.46
315076	1HOPPOLC	1.95
315073	1STONECA	5.71
314784	1WEYRHSB	0.64
314539	3UNCAMP	0.81
314541	3WATKINS	0.23
314229	6MT R221	-0.33
315074	CIR_AB2-152	0.89
315075	CIR_AB2-152	0.88
292791	U1-032 E	2.97
900672	V4-068 E	0.1
901082	W1-029E	13.15
902241	W2-022 C OP1	0.49
902242	W2-022 E OP1	3.26
907092	X1-038 E	2.02
914231	Y2-077	0.92
916042	Z1-036 E	13.29
917332	Z2-043 E	0.34
917342	Z2-044 E	0.18
917592	Z2-099 E	0.15
921163	AA1-063AE	1.48

918512	AA1-065 E OP	1.46
918562	AA1-072 E	0.06
921552	AA1-134 C	2.82
921553	AA1-134 E	1.21
921562	AA1-135 C	2.91
921563	AA1-135 E	1.25
921572	AA1-138 C	2.92
921573	AA1-138 E	1.25
921752	AA2-053 C	3.22
921753	AA2-053 E	1.38
921762	AA2-057 C	2.32
921763	AA2-057 E	1.16
921772	AA2-059 C	0.7
921773	AA2-059 E	0.32
921862	AA2-068 C	0.75
921863	AA2-068 E	0.35
920022	AA2-086 E	0.08
921982	AA2-088 C	2.24
921983	AA2-088 E	3.66
922442	AA2-165 C	0.32
922443	AA2-165 E	0.15
922472	AA2-169 C	0.7
922473	AA2-169 E	0.32
922512	AA2-174 C	0.15
922513	AA2-174 E	0.16
922522	AA2-177 C	6.12
922523	AA2-177 E	2.62
922532	AA2-178 C	2.9
922533	AA2-178 E	1.24
922602	AB1-013 C	0.88
922603	AB1-013 E	5.86
922722	AB1-053 C	0.44
922723	AB1-053 E	0.24
923262	AB1-132 C OP	5.95
923263	AB1-132 E OP	2.55
923572	AB1-173 C OP	0.98
923573	AB1-173 E OP	0.46
923582	AB1-173AC OP	0.98
923583	AB1-173AE OP	0.46
923801	AB2-015 C OP	2.9
923802	AB2-015 E OP	2.38
923851	AB2-025 C	1.64
923852	AB2-025 E	0.74
923911	AB2-031 C OP	0.97
923912	AB2-031 E OP	0.48

923981	AB2-039 C OP	7.68
923982	AB2-039 E OP	6.21
923991	AB2-040 C OP	3.2
923992	AB2-040 E OP	2.62
924071	AB2-051 C OP	38.45
924381	AB2-087 C	0.19
924382	AB2-087 E	0.09
924501	AB2-099 C	0.2
924502	AB2-099 E	0.09
924511	AB2-100 C	6.23
924512	AB2-100 E	3.07
924761	AB2-128 C	5.34
924762	AB2-128 E	2.1
924811	AB2-134 C OP	8.22
924812	AB2-134 E OP	8.08
924931	AB2-147 C	1.21
924932	AB2-147 E	1.97
924941	AB2-149 C OP	1.54
924942	AB2-149 E OP	2.51
924951	AB2-150 C OP	1.21
924952	AB2-150 E OP	1.97
925051	AB2-160 C OP	4.25
925052	AB2-160 E OP	6.93
925061	AB2-161 C OP	3.11
925062	AB2-161 E OP	5.07
925122	AB2-169 E	1.77
925141	AB2-171 C OP	1.67
925142	AB2-171E OP	2.72
925171	AB2-174 C OP	3.17
925172	AB2-174 E OP	2.87
925281	AB2-186 C	0.18
925282	AB2-186 E	0.08
925291	AB2-188 C OP	0.72
925292	AB2-188 E OP	0.32
925331	AB2-190 C	12.24
925332	AB2-190 E	5.25

Appendix 2

(DVP - DVP) The 6CHSTF B-6MESSER 230 kV line (from bus 314287 to bus 314228 ckt 1) loads from 102.66% to 103.63% (AC power flow) of its load dump rating (459 MVA) for the tower line contingency outage of 'LN 208-259'. This project contributes approximately 5.28 MW to the thermal violation.

CONTINGENCY 'LN 208-259'

OPEN BRANCH FROM BUS 314286 TO BUS 314309 CKT 1 /* 6CHSTF A
230.00 - 6IRON208 230.00

OPEN BRANCH FROM BUS 314309 TO BUS 314338 CKT 1 /* 6IRON208
230.00 - 6SOUWEST 230.00

OPEN BUS 314309 /* ISLAND

OPEN BRANCH FROM BUS 314276 TO BUS 314287 CKT 1 /* 6BASIN 230.00 -
6CHSTF B 230.00

END

Bus Number	Bus Name	Full Contribution
315065	1CHESTF6	39.27
315077	1HOPHCF1	2.28
315078	1HOPHCF2	2.28
315079	1HOPHCF3	2.28
315080	1HOPHCF4	3.46
315076	1HOPPOLC	1.95
315073	1STONECA	5.71
314784	1WEYRHSB	0.64
314539	3UNCAMP	0.81
314541	3WATKINS	0.23
314229	6MT R221	-0.33
315074	CIR_AB2-152	0.89
315075	CIR_AB2-152	0.88
292791	U1-032 E	2.97
900672	V4-068 E	0.1
901082	W1-029E	13.15
902241	W2-022 C OP1	0.49
902242	W2-022 E OP1	3.26
907092	X1-038 E	2.02
914231	Y2-077	0.92
916042	Z1-036 E	13.29
917332	Z2-043 E	0.34
917342	Z2-044 E	0.18
917592	Z2-099 E	0.15

921163	AA1-063AE	1.48
918512	AA1-065 E OP	1.46
918562	AA1-072 E	0.06
921552	AA1-134 C	2.82
921553	AA1-134 E	1.21
921562	AA1-135 C	2.91
921563	AA1-135 E	1.25
921572	AA1-138 C	2.92
921573	AA1-138 E	1.25
921752	AA2-053 C	3.22
921753	AA2-053 E	1.38
921762	AA2-057 C	2.32
921763	AA2-057 E	1.16
921772	AA2-059 C	0.7
921773	AA2-059 E	0.32
921862	AA2-068 C	0.75
921863	AA2-068 E	0.35
920022	AA2-086 E	0.08
921982	AA2-088 C	2.24
921983	AA2-088 E	3.66
922442	AA2-165 C	0.32
922443	AA2-165 E	0.15
922472	AA2-169 C	0.7
922473	AA2-169 E	0.32
922512	AA2-174 C	0.15
922513	AA2-174 E	0.16
922522	AA2-177 C	6.12
922523	AA2-177 E	2.62
922532	AA2-178 C	2.9
922533	AA2-178 E	1.24
922602	AB1-013 C	0.88
922603	AB1-013 E	5.86
922722	AB1-053 C	0.44
922723	AB1-053 E	0.24
923262	AB1-132 C OP	5.95
923263	AB1-132 E OP	2.55
923572	AB1-173 C OP	0.98
923573	AB1-173 E OP	0.46
923582	AB1-173AC OP	0.98
923583	AB1-173AE OP	0.46
923801	AB2-015 C OP	2.9
923802	AB2-015 E OP	2.38
923851	AB2-025 C	1.64
923852	AB2-025 E	0.74
923911	AB2-031 C OP	0.97

923912	AB2-031 E OP	0.48
923981	AB2-039 C OP	7.68
923982	AB2-039 E OP	6.21
923991	AB2-040 C OP	3.2
923992	AB2-040 E OP	2.62
924071	AB2-051 C OP	38.45
924381	AB2-087 C	0.19
924382	AB2-087 E	0.09
924501	AB2-099 C	0.2
924502	AB2-099 E	0.09
924511	AB2-100 C	6.23
924512	AB2-100 E	3.07
924761	AB2-128 C	5.34
924762	AB2-128 E	2.1
924811	AB2-134 C OP	8.22
924812	AB2-134 E OP	8.08
924931	AB2-147 C	1.21
924932	AB2-147 E	1.97
924941	AB2-149 C OP	1.54
924942	AB2-149 E OP	2.51
924951	AB2-150 C OP	1.21
924952	AB2-150 E OP	1.97
925051	AB2-160 C OP	4.25
925052	AB2-160 E OP	6.93
925061	AB2-161 C OP	3.11
925062	AB2-161 E OP	5.07
925122	AB2-169 E	1.77
925141	AB2-171 C OP	1.67
925142	AB2-171E OP	2.72
925171	AB2-174 C OP	3.17
925172	AB2-174 E OP	2.87
925281	AB2-186 C	0.18
925282	AB2-186 E	0.08
925291	AB2-188 C OP	0.72
925292	AB2-188 E OP	0.32
925331	AB2-190 C	12.24
925332	AB2-190 E	5.25