

**Facilities Study Report**

**For**

**Physical Interconnection of**

**PJM Generation Interconnection Request**

**Project ID AG1-471**

**“Upchurch-Wayne County 69kV”**

Revision 0: December 2024

## Introduction

This Facilities Study has been prepared in accordance with the PJM Open Access Transmission Tariff. The Transmission Owner (TO) is East Kentucky Power Cooperative (“EKPC”).

### A. Transmission Owner Facilities Study Summary

#### 1. PROJECT DESCRIPTION

The Project Developer (PD) has proposed a solar generating facility located in Clinton County, Kentucky with a designated PJM Project ID of AG1-471. The installed facilities will have a total Maximum Facility Output (MFO) of 60 MW with 36 MW of this output being recognized by PJM as Capacity.

#### 2. POINT OF INTERCONNECTION (POI)

The Generating Facility will interconnect with the EKPC transmission system via a newly constructed 69 kV Main and Transfer substation, Massingale Road substation, tapping the Upchurch - Wayne County 69kV line, approximately 6.77 miles from Upchurch Tap and 1.37 miles from Wayne County.

The construction of the new interconnection substation will split the existing Summer Shade – Wayne County 69kV line into two lines on the transmission system. These two lines will connect the new Massingale Road substation to the Summer Shade and Wayne County substations.

The proposed generation interconnection is shown on the single-line diagram in Attachment #1.

#### 3. POINT OF CHANGE IN OWNERSHIP

The Point in Change of Ownership (PCO) will be located at the Project Developer (PD) side of a 69 kV disconnect switch to be installed by EKPC at the interface between the PD-owned substation facilities and EKPC’s substation facilities at the Massingale Road 69 kV Substation. The switch shall be installed on a steel transmission line monopole structure located outside the substation fence. The exact location will be determined during project detailed design and EKPC will install, own, operate, and maintain the switch.

#### 4. SCOPE OF PROJECT DEVELOPER INTERCONNECTION FACILITIES

Project Developer will design, build, own, operate and maintain the Project Developer Interconnection Facilities on Project Developer’s side of the Point of Change in Ownership (PCO). This includes, but is not limited to:

- Main Power Transformer(s) (MPT), Generation step-up (GSU) transformer(s) or final transformation, as applicable.
- Circuit breakers and associated equipment located between the high side of the MPT(s) or GSU(s) and the Point of Change in Ownership
- Generator lead line from the Generating Facility to the Point of Change in Ownership
- Relay and protective equipment, telecommunications equipment, and Supervisory Control and Data Acquisition (SCADA) to comply with EKPC’s Applicable Technical Requirements and Standards

The proposed facility must meet EKPC’s published facility connection requirements. The latest version of these requirements can be accessed via the following link:

<https://www.pjm.com/planning/design-engineering/to-tech-standards/ekpc.aspx>

Reference section 5.9 for inverter-based generating facilities.

## **B. Transmission Owner Facilities Study Results**

The following is a description of the planned Transmission Owner facilities for the physical interconnection of the proposed AG1-471 project to the EKPC transmission system. These facilities shall be designed according to EKPC Applicable Technical Requirements and Standards. Once built, EKPC will own, operate, and maintain these Facilities.

### **1. TRANSMISSION OWNER INTERCONNECTION FACILITIES:**

A 69 kV transmission line monopole dead-end structure and foundation outside the fence of the Interconnection Substation, to terminate the Project Developer's generator lead line will be considered Transmission Owner Interconnection Facilities (TOIF). A 69 kV 3-pole disconnect switch will also be mounted to this monopole dead-end structure serving as the PCO.

The TOIF will also include the line conductor from the dead-end structure to the bus position in the switchyard of the Massingale Roadsubstation.

#### **Installation of fiber cable circuits**

EKPC shall use telecommunications equipment that matches its current network and equipment requirements.

Two 48-strand fiber optic cables will be installed between the EKPC substation control house at the new Massingale Road substation and the PD facility for relaying, metering, and SCADA circuit requirements. The exact details and installation plans for this fiber will be developed during project scoping.

### **2. STAND ALONE NETWORK UPGRADES**

#### **Massingale Road Interconnection Substation**

A new Main and Transfer substation, Massingale Road 69kV, will be constructed along the Upchurch-Wayne County 69 kV transmission line to interconnect the project with the East Kentucky Power Cooperative ("EKPC") transmission system.

#### **Scope of Work**

The major equipment and material associated with the new substation is listed below:

<b>QTY</b>	<b>Unit</b>	<b>DESCRIPTION</b>
1	Each	69 kV High Profile Substation Structure
4	Each	69 kV, 1200 Amp Circuit Breakers
16	Each	69 kV GOAB Switches
1	Lot	Electrical Material (insulators, terminals, etc.)
1	Each	Station Service Transformer, 100 KVA (39.9 kV-120/240V)
9	Each	Arresters, Lightning 69 kV Station 48 MCOV Polymer
3	Each	CT's, 69 kV
3	Each	PT's, 69 kV

The PD shall be responsible for acquiring all property required for this new EKPC interconnection substation and shall deed that property to EKPC. EKPC will have no responsibility to acquire any property associated with the substation, either initially or if it is determined later that additional property is required.

### **System Protection**

The following system protection scope of work applies for this project. All system protection equipment described in this section will be owned, operated, and maintained by EKPC.

Control House: EKPC shall procure and install a drop-in style control building fully furnished and complete with one bus differential panel, one PD line panel, two transmission line panels, one transfer breaker panel, one SCADA panel, two 125V DC battery banks, and all required operating equipment.

Relay Panels: EKPC shall install a standard bus panel complete with P1 SEL-587Z and P2 SEL-487B relays tripping P1 & P2 lock out relays.

Line Transfer Panel – EKPC shall install a standard transfer line panel with P1 & P2 SEL-411L relays. A SEL-451 relay shall be utilized for breaker control, breaker failure, and reclosing. The line panel shall have the capability to transfer the other circuit breaker terminals.

Panel for protection of the Project Developer (PD) facility connection– EKPC shall install a standard line panel with P1 & P2 SEL-411L relays. Line option relays shall utilize line current differential. A SEL-451 relay shall be utilized for breaker control, breaker failure, and reclosing.

Line Panel for the Wayne County 69kV Line Exit (1.4 miles) – EKPC shall install standard line panel with P1 & P2 SEL-411L relays for each line exit. The P1 & P2 relays shall utilize a Line Current Differential tripping scheme over fiber. SEL-451 relays shall be utilized for breaker control, breaker failure, and reclosing.

Line Panel for the Summer Shade 69kV Line Exit (42.78 miles) – EKPC shall install standard line panel with P1 & P2 SEL-411L relays for each line exit. The P1 & P2 relays shall utilize a high-speed com-assisted tripping scheme over fiber.

SCADA Panel – EKPC shall install standard SCADA panel with an Orion LX+ and dual metering for the PD. P1 Meter to be an ION8650A and P2 Meter to be a SEL-735.

EKPC requires the PD to utilize all Schweitzer Engineering Laboratories (SEL) relays and related protective equipment for facilities that will be interconnecting or communicating with EKPC relaying. EKPC reserves the right to specify relays or other protective equipment utilized in the PD substation as required based on the protection schemes utilized. All protection system designs shall be reviewed by EKPC System Protection or its designer during the design phase to ensure proper clearing times, coordination, and compliance with applicable NERC regulations.

Control cables shall be pulled from new breakers and other required equipment to the control house.

Commissioning: Each relay panel shall be fully commissioned prior to being placed in service. Commissioning shall include AC current and potential circuits, DC functional, relay testing, and end-to-end testing where required. Each of the remote line ends (Wayne County and Summer Shade Substations) shall be commissioned using end-to-end testing prior to energizing the POTT scheme to the Massingale Road substation.

### **3. NETWORK UPGRADES**

#### **Transmission Line Tie-in for new interconnection substation:**

The Upchurch Tap – Wayne County 69 kV line section will be cut and looped into the new interconnection substation.

The new transmission line loop-in facilities will be owned, operated, and maintained by EKPC. The tap from the existing transmission line into the new switching station will consist of (2) direct embed guyed steel 3-pole dead-end structures. All existing wires or structures on the Upchurch – Wayne County line in between the two tie-in structures will be removed. Each end of the tie-in is assumed to extend no longer than 250’.

#### **Upgrades to neighboring facilities:**

Wayne County Substation

Relay settings shall be reviewed for the Wayne County-Summer Shade 69 kV line to accommodate the new Massingale Road substation, and relay files will be updated accordingly. New modern SEL-411L relays shall be installed for communication with the Massingale Road substation.

Summer Shade Substation

Relay settings shall be reviewed for the Wayne County-Summer Shade 69 kV line to accommodate the new Massingale Road substation, and relay files will be updated accordingly. New modern SEL-411L relays shall be installed for communication with the Massingale Road substation.

#### **Installation of fiber cable circuits:**

Overhead optical ground wire (“OPGW”) installation will be required to meet communications requirements for the new EKPC Massingale Road Substation. New OPGW will need to be installed on the Wayne County-Massingale Road and the Massingale Road-Summer Shade 69 kV line sections (a total of 44.2 miles).

### **5. MILESTONE SCHEDULE FOR COMPLETION OF EKPC WORK**

Facilities outlined in this report are estimated to take 25 months to construct, from the time the Generation Interconnection Agreement is fully executed. This schedule may be impacted by the timeline for procurement and installation of long lead items, and the ability to obtain outages to construct and test the proposed facilities.

Description	Start month	Finish month
Detailed Design	1	8
Procurement	2	14
Construction	14	25

## 6. ASSUMPTIONS IN DEVELOPING SCOPE/COST/SCHEDULE

### Transmission Line Assumption:

1. The new substation will be constructed on the north side of EKPC's line right-of-way. This estimate will need to be re-evaluated if it is located on the south side of the right-of-way.
2. The PD is responsible for either providing deeded property or obtaining any new ROW/easements on behalf of EKPC for routing the looped-in transmission line to the new substation.
3. Any required tree / vegetation clearing for the new substation and the transmission line loop-in work will be the responsibility of the PD.
4. It is assumed that standard drilled piers can be used. If geotechnical assessment reveals poor soil conditions or contamination, additional measures may be required.
5. Required transmission line outages can be scheduled as planned. Transmission line outages are:
  - a. typically, not taken in the summer (June-August) or winter (December-February),
  - b. cancelled during extreme weather conditions, and
  - c. In some cases, required to be scheduled twelve (12) or more months in advance.
6. No delays due to equipment or material delivery, environmental, regulatory, permitting, real estate, extreme weather, or similar events.
7. No significant sub-surface rock encountered during construction, and soil conditions are suitable for standard foundation installations.
8. No structure replacements are required for the installation of fiber circuits.
9. All outages required for installation of fiber circuits will be able to be taken.

The following engineering assumptions have been included for the transmission line information provided:

1. Neither foundation nor transmission pole structural analyses have been performed. Information provided assumes that no significant foundation or structural issues are present.
2. Construction will be scheduled to avoid winter peak load periods (December -February).
3. The preliminary schedule assumes that transmission line outages can be obtained as necessary.
4. Material and equipment costs are based on current pricing at the time of this study.
5. Environmental permits and reviews shall be completed by EKPC and can be completed in a timely manner.

### **Substation & System Protection Assumptions:**

The following general assumptions have been included for the substation information provided:

1. No delays due to equipment or material delivery, environmental, regulatory, permitting, property/easement acquisitions, extreme weather, or similar events.
2. No significant sub-surface rock encountered during construction, and soil conditions suitable for standard ground-grid and foundation installations.
3. PD shall acquire an adequate and suitable site and grant ownership to EKPC to accommodate EKPC's interconnection substation, as mentioned above.
4. The PD will provide all necessary easements for a permanent road to provide substation access. This substation access shall be from an existing county or state road. The IC will convey these rights to EKPC if they own the property on which the substation access road will be located. Otherwise, EKPC will need to acquire the access rights from the owner of the property.

The following engineering assumptions have been included for the substation information provided:

1. Neither foundation nor structural analyses have been performed. Information provided assumes that no significant foundation or structural issues are present.
2. The schedule assumes no issues related to scheduling outages of existing transmission lines to terminate into the new substation.
3. Material and equipment-related costs are based on current pricing at the time of this study.
4. Environmental permits and reviews will be completed by EKPC and can be completed in a timely manner.
5. No relay coordination issues exist outside of the remote end stations. Further coordination will be studied during detailed design.

### **Metering Assumptions:**

The following assumptions have been included for the metering information provided:

1. No delays due to equipment or material delivery, environmental, regulatory, permitting, real estate, extreme weather, or similar events.
2. Fiber-optic cable and associated equipment installation is completed as scheduled.
3. Material and equipment-related costs are based on current pricing at the time of this study.
4. Once fiber-optic cable installation is complete, the fiber will not be damaged.

### **Communications Assumptions:**

The following assumptions have been included for the telecommunications information provided:

1. No delays due to equipment or material delivery, environmental, regulatory, permitting, real estate, extreme weather, or similar events.
  2. Material and equipment-related costs are based on current pricing at the time of this study.
  3. Once fiber-optic cable installation is complete, the fiber will not be damaged.

### **Environmental Assumptions:**

The following general assumptions have been included for environmental permitting requirements:

1. For the PD's project, there are no "federal actions" (i.e., federal financial assistance or grants; or federal permit, license, or approval) present that would trigger NEPA compliance obligations for the EKPC facilities as a connected action.
2. Substation location will remain in the currently identified location. Relocation of the substation site may require a re-evaluation of the permitting obligations.

## **7. REVENUE METERING REQUIREMENTS**

All metering needed for this interconnection project must meet the metering requirements stated in Appendix 2, section 8 of the AG1-471 GIA, and in PJM Manuals M01 and M14D. The details of applicable revenue metering requirements are given in EKPC's Facility Connection Requirements Document posted on PJM website.

The revenue metering will be installed on the EKPC side of the PCO, and will be installed, owned and maintained by EKPC. Metering requirements for this facility include the installation of EKPC's standard revenue quality metering package, including potential transformers and current transformers.

The cost for installation of the metering facilities contained in the new EKPC substation are included in the substation costs provided.

## **8. LAND REQUIREMENTS FOR INTERCONNECTION SUBSTATION**

Land requirements for the Interconnection Substation needed for this interconnection project must meet the requirements in the EKPC Facility Connection Requirements Document posted on PJM website. The PD shall be responsible for acquiring all property required for this new EKPC interconnection substation and shall deed that property to EKPC. EKPC will have no responsibility to acquire any property associated with the substation, either initially or if it is determined later that additional property is required.


## **9. ENVIRONMENTAL AND PERMITTING**

EKPC or its representative will perform all necessary environmental assessments and obtain all necessary permits/approvals associated with construction of all EKPC facilities required to facilitate the interconnection of the new generating facility. This includes the Storm-water Pollution Prevention Plan ("SWPPP"), obtaining KYR 10 storm-water permit, and conducting the necessary SWPPP inspections prior to all construction activities.

## **C. APPENDICES**

Attachment #1:	Conceptual Single line Diagram
Attachment #2:	Substation General Arrangement
Attachment #3:	Preliminary Site Layout Plan

# Attachment 1: Conceptual One Line Diagram

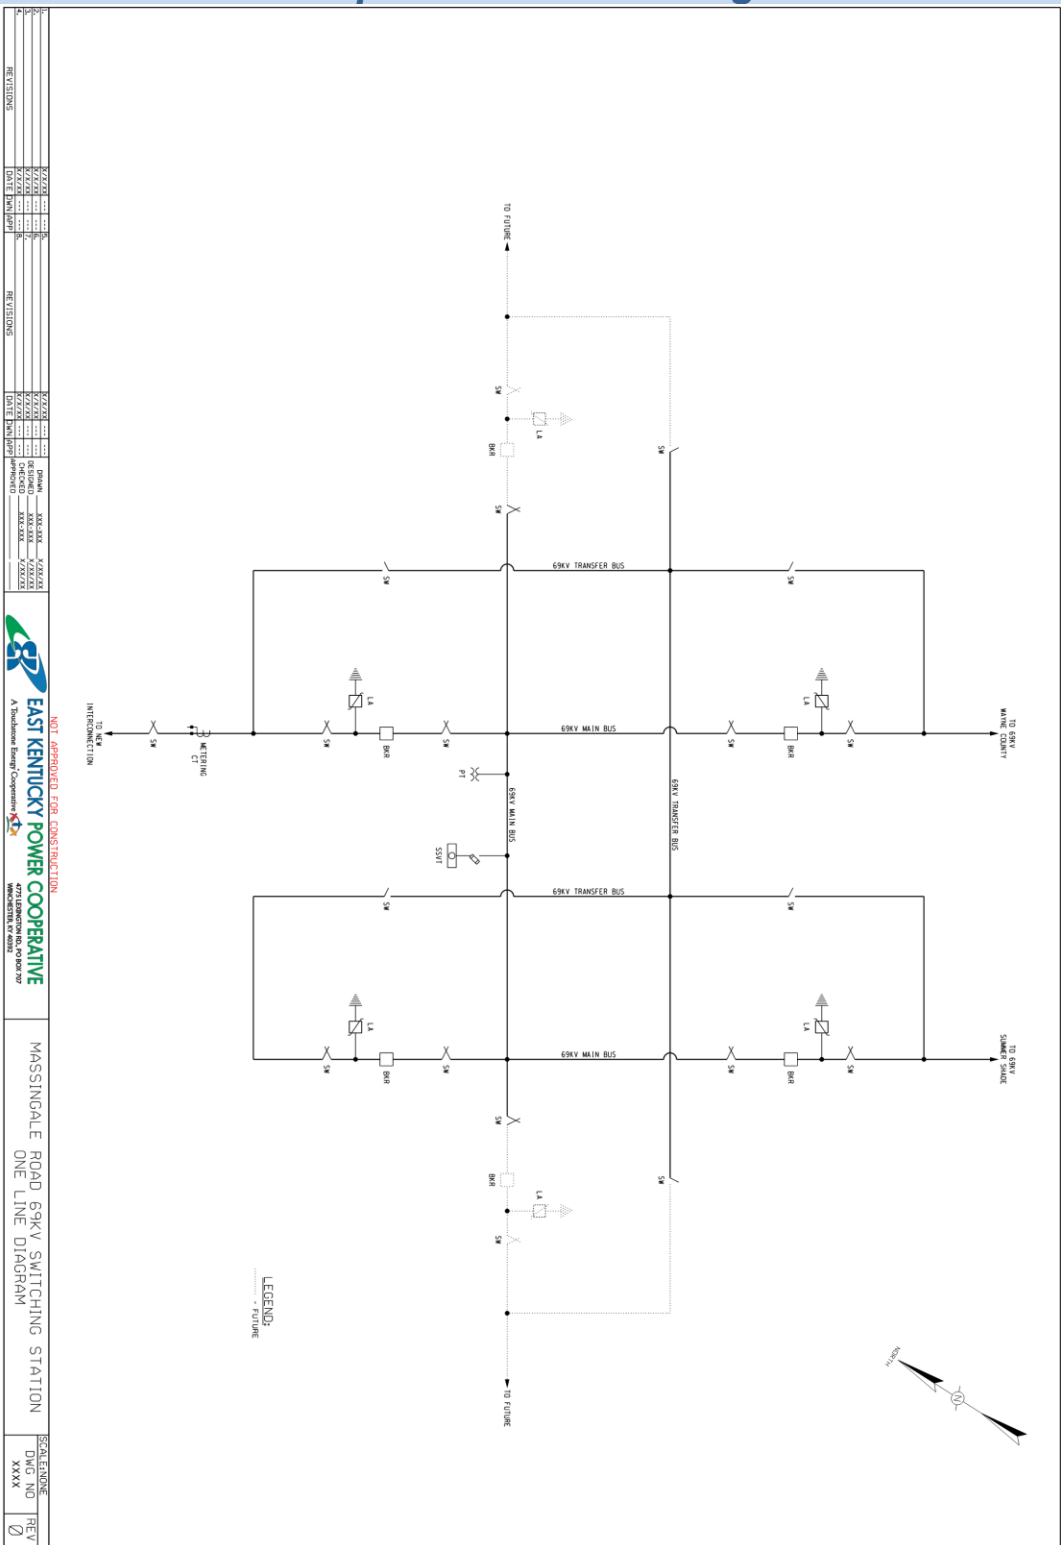

REVISED	DATE	BY	REVISIONS
01/20/20	01/20/20	JMM	DESIGNED
02/20/20	02/20/20	JMM	CHECKED
03/20/20	03/20/20	JMM	APPROVED
04/20/20	04/20/20	JMM	REVISED
05/20/20	05/20/20	JMM	REVISED
06/20/20	06/20/20	JMM	REVISED
07/20/20	07/20/20	JMM	REVISED
08/20/20	08/20/20	JMM	REVISED
09/20/20	09/20/20	JMM	REVISED
10/20/20	10/20/20	JMM	REVISED
11/20/20	11/20/20	JMM	REVISED
12/20/20	12/20/20	JMM	REVISED

**EAST KENTUCKY POWER COOPERATIVE**  
A Standalone Energy Cooperative

MASSINGALE ROAD 69KV SWITCHING STATION  
ONE LINE DIAGRAM

SCALE ENGINE  
DWG NO  
XXXX  
REV  
0



**Attachment 3:**  
**Preliminary Site Layout Plan**

