

Phase 2 Facilities Study Report
For
Physical Interconnection of
PJM Generation Interconnection Request
Project ID AG1-375

"Sorenson - Desoto 345 kV"

December 2024

Introduction

This Facilities Study has been prepared in accordance with the PJM Open Access Transmission Tariff, as well as the Application and Studies Agreement between the Project Developer and PJM Interconnection, LLC (PJM or Transmission Provider (TP)). The Transmission Owner (TO) is AEP Indiana Michigan Transmission Company Inc. to be abbreviated in the remainder of this report as IMTCo.

A. Transmission Owner Facilities Study Summary

1. PROJECT DESCRIPTION

The Project Developer (PD) has proposed a Solar Generating Facility located in Blackford County, Indiana with a designated PJM Project ID of AG1-375.

The AG1-375 project is a 100 MW Solar Generating Facility (60 MW Capacity) and will share the same Point of Change in Ownership as AF2-177 project. The AG1-375 project will connect to the American Electric Power (AEP) Proposed AF2-177 345 kV Station.

2. POINTS OF INTERCONNECTION AND CHANGE IN OWNERSHIP

The Point of Interconnection (POI) is the point where the risers connect the generation lead circuit to the Proposed AF2-177 345 kV Station line termination point. The AG1-375 will share the same Point of Change in Ownership (PCO) as PJM project ID AF2-177.

3. SCOPE OF PROJECT DEVELOPER INTERCONNECTION FACILITIES

The Project Developer will design, build, own, operate, and maintain the Project Developer Interconnection Facilities on the Project Developer's side of the Point of Change in Ownership (PCO). This includes, but is not limited to:

- Generation lead line conductors from the Generating Facility to the Point of Change in Ownership (shared with AF2-177).
- **Installation of the submetering equipment described below in section B.3.**
- **Instrument transformers required to provide revenue quality metering and settlement between the AG1-375 project and any previous/originating projects interconnecting behind the same Point of Change in Ownership.**
- **Additional communications cable connections required between the below-proposed ethernet switch (to be installed at the AG1-375 project collector station) and the primary router (either installed or to be installed at the originating project collector station) for metering data transport.**

B. Transmission Owner Facilities Study Results

The following is a description of the Transmission Owner facilities required for physical interconnection of the proposed AG1-375 project to the AEP transmission system. These facilities shall be designed according to AEP standards. Once built, AEP will own, operate, and maintain these Facilities.

1. INTERCONNECTION SUBSTATION (NEW) (Stand Alone Network Upgrade)

IMTCo will construct a new 345 kV breaker and a half station, initially populated with three (3) circuit breakers, expandable to six (6) circuit breakers. This typical arrangement is planned to be designed to accommodate 5000A of continuous current. The station will be constructed to the east of the Sorenson - Desoto #2 circuit to interconnect the project with the AEP transmission system.

Major equipment is expected to include:

- Three (3) 5000A 63 kA circuit breakers with associated control relaying.
- Nine (9) 3000A circuit breaker disconnect switches.
- Two (2) single phase station service voltage transformers (SSVT).
- One (1) 16' x 48' Drop-In Control Module (DICM).
- Four (4) single phase wave traps, two (2) each on the line exits to the Desoto and proposed AF1-148 345 kV Stations.
- A Directional Comparison Blocking (DCB) protective relaying scheme for the line to the proposed AF1-148 345 kV Station.
- A DCB protective relaying scheme for the line to the Desoto 345 kV Station.
- Two (2) 3-phase coupling capacitor voltage transformers (CCVT), one each for the line exits to the proposed AF1-148 and Desoto 345 kV Stations.
- Two (2) A-Frame line exit structures, one each for the line exits to the proposed AF1-148 and Desoto 345 kV Stations.
- Associated conductors (buswork, ground grid, jumpers), telecom terminal equipment, insulators, arresters, foundations, and structures.

The civil work required to develop a site that accommodates the installation of the above station includes grading of a 244' x 556' pad.

- IMTCo will review and revise (as necessary) the protective relay settings at the Proposed AF2-177 345 kV Station to account for the additional generation.

2. TRANSMISSION LINE TIE-IN

IMPCo will perform the following construction tasks cutting in the proposed AF2-177 345 kV Station via an in-and-out arrangement:

- Remove two (2) tower structures (#419 and #421) along with approximately 0.4 miles of existing wire.
- Install two (2) new 150' custom steel, single circuit, single pole dead end structures on concrete piers with anchor bolt cages along the existing Sorenson - Desoto #2 345 kV Circuit.
- Install two (2) new 130' custom steel, single circuit, single pole, running angle structures on concrete piers with anchor bolt cages along the perimeter of the proposed AF2-177 345 kV station.
- Install four (4) spans of double bundle ACSR 2156 (Bluebird) transmission line conductor with 12/7 Guinea shield wire.

3. TRANSMISSION OWNER INTERCONNECTION FACILITIES:

The IMTCo Interconnection Facilities are expected to include but are not limited to the following:

- Installation of one (1) new steel, 120', single circuit, single pole dead end structure on a concrete pier foundation with an anchor bolt cage and one span of double bundle ACSR 954 (Cardinal) transmission line conductor with 12/7 Guinea shield wire for the generation lead circuit extending from the proposed AF2-177 345 kV station.
- Extension of two (2) underground 48 count all dielectric loose tube (ADLT) fiber optic cables from the proposed AF2-177 345 kV station control house to fiber demarcation splice boxes to support direct fiber relaying between the proposed AF2-177 345 kV and Project Developer's collector stations. The Project Developer will be responsible for the fiber extension from the splice boxes to the collector station.
- Dual direct fiber current differential relays for the generation lead to the proposed AF2-177 collector station.
- Installation of a standard revenue metering package, including three (3) single phase current transformers (CT), three (3) single phase coupling capacitor voltage transformers (CCVT), associated structures and foundations, one (1) ethernet switch, and one (1) DICM-installed metering panel, for the generation lead circuit at the proposed AF2-177 345 kV station.
- IMTCo will procure one (1) metering panel with two (2) primary meters and one (1) ethernet switch to be installed in the AG1-375 Project Developer's collector station.
- IMTCo will procure one (1) connected grid router (CGR) to be installed in the Project Developer's originating project collector station.

4. UPGRADE TO NEIGHBORING STATIONS

4.1 Proposed AF1-148 345 kV Station

- Review and revise (as necessary) the protective relay settings.

4.2 Desoto 345 kV Station

- Review and revise (as necessary) the protective relay settings.

4.3 Jay Station

- Reconfigure the existing ethernet switch, installing one (1) new Small Form-Factor Pluggable (SFP) transceiver.

4.4 3M Station

- Reconfigure the existing ethernet switch, installing one (1) new Small Form-Factor Pluggable (SFP) transceiver.

5. INSTALLATION OF FIBER CABLE CIRCUITS

IMTCo will install two (2) station exit All Dielectric Loose Tube (ADLT) station exit transitions and two (2) new fiber optic cable paths consisting of a total 6.9 miles of 144 count ADLT cable installed underground in new right of way. This installation is required to accommodate SCADA and ethernet connectivity between the proposed AF2-177, 3M, and Jay Stations.

7. MILESTONE SCHEDULES FOR COMPLETION OF AEP WORK

7.1 STANDARD OPTION:

<u>Activity</u>	<u>Number of Days (See Notes)</u>
Project Engagement*	1
Engineering Start	70
Material Ordering	112
Construction (Grading & Below Grade)	457
Construction (Above Grade)	547
Outage Requests Made By	400
Outage (Structure Foundations)**	832
Outage (Cut-in & Testing)**	882
Ready For Back Feed (ITO In-Service Date)	912

***Day 1 will be determined at the PJM construction project kick off meeting.**

****Scheduled Outages are contingent upon outage availability. Longer duration outages are not available during peak load periods.**

The above schedule is based on typical AEP construction timelines, long lead material availability, and common outage constraints. The facilities outlined in this report, as constructed by AEP, are estimated to take 30 months to complete. Given this construction timeline, timeline for the phase 3 study, and a typical period for agreement processing, AEP can support a backfeed date of February 4, 2028, subject to change during the tariff defined Final Agreement Negotiation Phase. The Project Developer is expected to have the interconnection facilities constructed and ready to accept backfeed by the business day prior to the final negotiated backfeed date.

7.2 OPTION TO BUILD:

<u>Activity</u>	<u>Dates (See Notes)</u>
Project Engagement*	1
Engineering Start	70
Material Ordering	140
Construction (Grading & Below Grade)	600
Construction (Above Grade)	630
Outage Requests Made By	335
Outage (Structure Foundations)**	650
Outage (Cut-in & Testing)**	700
Ready For Back Feed (ITO In-Service Date)	730

***Day 1 will be determined at the PJM construction project kick off meeting. Scheduled Outages are contingent upon outage availability. Longer duration outages are not available during peak load periods.**

****Coordination with the Project Developer will be required 90 days prior to the start of this task.**

The above schedule is based on typical AEP construction timelines, long lead material availability, and common outage constraints. The facilities related to the cut-in and remote end stations outlined in this report, as constructed by AEP, are estimated to take 24 months to complete. Given this construction timeline, timeline for the phase 3 study, and a typical period for agreement processing, AEP can support a backfeed date of October 15, 2027, subject to change during the tariff defined Final Agreement Negotiation Phase. The Project Developer is expected to have the interconnection facilities, including the interconnection station, ready to accept backfeed by the business day prior.

8. ASSUMPTIONS IN DEVELOPING SCOPE/COST/SCHEDULE

Note - Any materials purchased, or design decisions made by the Project Developer (relative to any facilities to be owned by AEP) prior to coordination with and approval by the executing AEP team (pursuant to an Engineering and Procurement or Generation Interconnection Agreement) are at the developer's risk and may not meet the specifications required for interconnection with the AEP transmission system.

8.1 SCOPE ASSUMPTIONS:

- Equipment specifications (Breaker ratings, conductor size, etc.) are a result of the desktop functional scoping process observed while conducting this facilities study. These specifications are subject to change based on the results of the detailed scoping efforts that will take place post-interconnection or engineering and procurement agreements.

- Protection and Control (P&C) coordination with the Project Developer will be needed throughout the project. The Project Developer will be required to install an AEP-compatible line relaying protection panel at the collector substation using AEP standards to ensure relay coordination and adequate line protection. The AEP design team will ensure that the firmware at the collector station terminal matches the approved firmware at the AEP terminal. Failure to accept the cost of a matching line relay protection panel may change scoping.
- Scopes provided are based on a table-top process without the benefit of the results of site-specific engineering studies (e.g., soil borings, environmental survey, ground grid, etc.), unless otherwise provided by the Project Developer.
- The Project Developer will have their construction and required checkout complete prior to the energization of the AG1-375 uprate to the AF2-177 project and any required testing outages.
- This project is dependent on the completion of construction for the AF2-177 project.
- **The additional submetering scope provided assumes that a single submeter per transformer for each interconnection project will be sufficient to provide settlement data for an individually queued project.**
- **Additional submeters may be required depending on the Project Developer's final generation configuration.**

8.2 SCHEDULE ASSUMPTIONS:

- All transmission outages are subject to PJM and AEP Operations outage scheduling requirements.
- Significant scope of work changes will impact the schedule.
- The above schedule reflects only the work required to interconnect the AG1-375 project. The schedules regarding network upgrades associated with this project, if any, are detailed in the documentation related to the specific network upgrade.
- Slippage by the Project Developer in executing the Generation Interconnection Agreement (GIA) does not equate to a "day for day" slippage in the scheduled back feed and in service dates. Depending on the time of year, planned outages, neighboring projects and maintenance of the grid, outage availability has the potential to shift by weeks or months depending on conditions at the time of the fully executed agreement.
- The backfeed date assumes the completion of construction for the AF1-177 project within the timeline proposed in its facilities study report. Any change in the timeline for the AF1-177 project will result in a change to the timeline for the AG1-375 project.

8.3 ESTIMATE ASSUMPTIONS:

- Estimates provided are based on a table-top process without the benefit of the results of site-specific engineering studies (e.g., soil borings, environmental survey, ground grid, etc.), unless otherwise provided by the Project Developer.

9. METERING REQUIREMENTS

All metering needed for this interconnection project must meet the metering requirements stated in Appendix 2, section 8 of the AG1-375 GIA, and in PJM Manuals M01 and M14D. The details of applicable metering requirements are provided in the "Connection Requirements for the AEP

Transmission System" document, found at:

<https://www.aep.com/requiredpostings/AEPTransmissionStudies>

The primary and backup metering for the combined AG1-375/AF2-177 project will be installed on the Transmission Owner side of the Point of Change in Ownership and will be owned and maintained by the Transmission Owner.

Any additional generation proposed behind an originating project's PCO that differs in either fuel type or corporate entity from the originating project will require the installation of additional submetering for both the originating project and the uprate for the purpose of settlement. Submetering will require additional space within the originating project's facilities. The meters, routers, Ethernet to fiber converters, and telecom switch will be procured and owned by AEP. The revenue quality instrument transformers, fiber-optic cable connecting the submeters, and any other additional hardware for the required submetering will be procured, installed, owned, and maintained by the Project Developer.

10. LAND REQUIREMENTS FOR INTERCONNECTION SUBSTATION

Land requirements for the Interconnection Substation needed for this interconnection project must meet the requirements in the <https://www.aep.com/requiredpostings/AEPTransmissionStudies> posted on AEP website.


11. ENVIRONMENTAL AND PERMITTING

The Project Developer is expected to obtain, at its cost, all necessary permits and provisions for the facilities to be constructed for this interconnection. AEP requires that the standards provided in the "Standards and Expectations for Siting, Real Estate, Right-Of-Way, and Environmental Permitting for Transmission Interconnection Projects", found at:

<https://www.aep.com/requiredpostings/AEPTransmissionStudies> be adhered to for all facilities interconnecting with the AEP transmission system.

C APPENDICES

Attachment #1: Single line Diagram for the Physical Interconnection

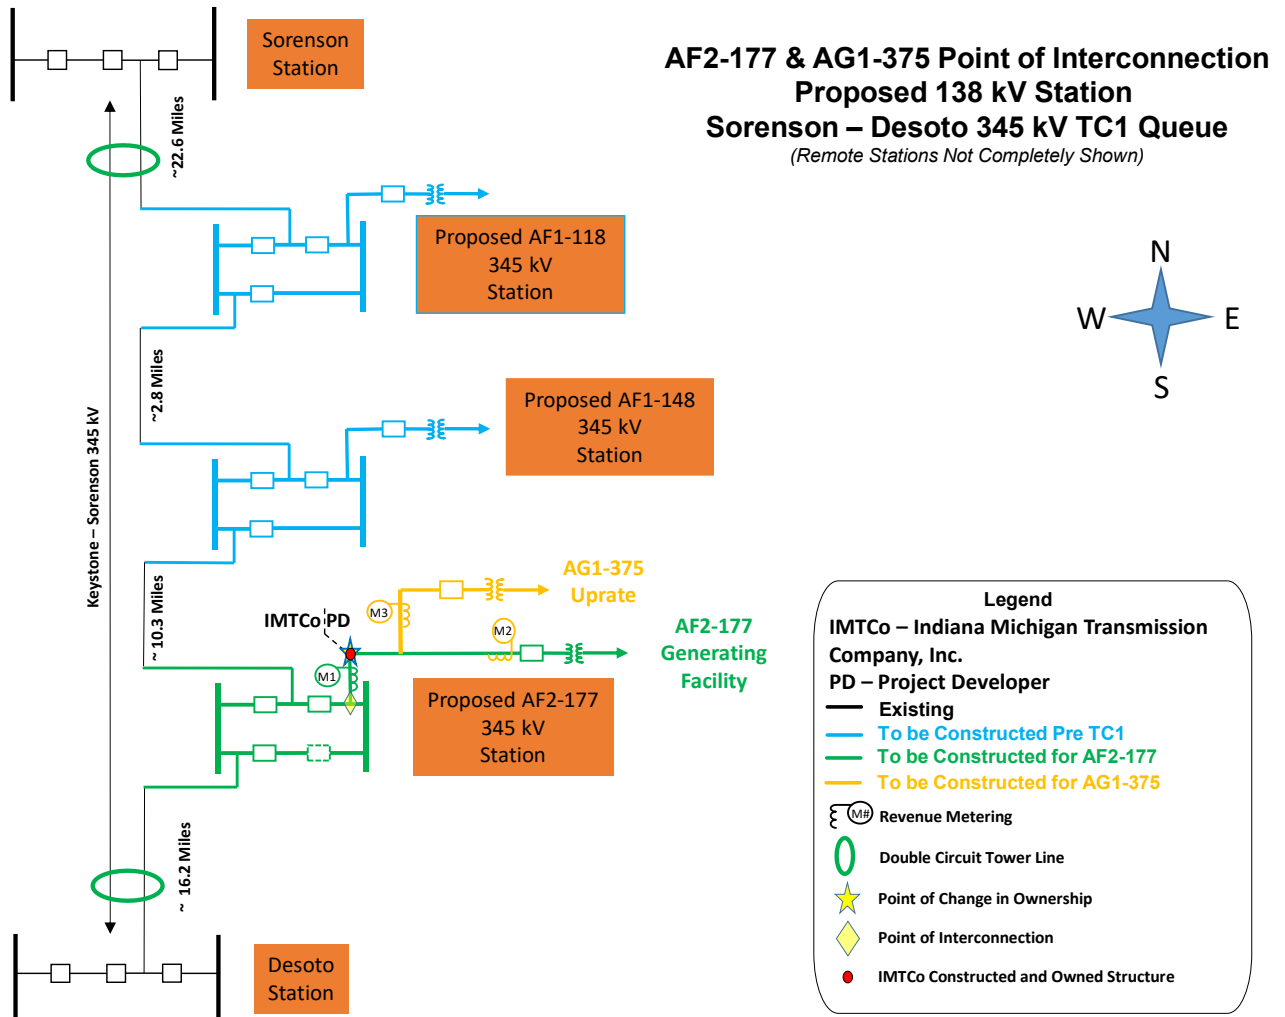

Attachment #2: POI Map

