

***Generation Interconnection
System Impact Study Report***

For

***PJM Generation Interconnection Request
Queue Position AD2-067***

Centerburg 138 kV

December 2019

Preface

The intent of the System Impact Study is to determine a plan, with approximate cost and construction time estimates, to connect the subject generation interconnection project to the PJM network at a location specified by the Interconnection Customer. As a requirement for interconnection, the Interconnection Customer may be responsible for the cost of constructing: (1) Direct Connections, which are new facilities and/or facilities upgrades needed to connect the generator to the PJM network, and (2) Network Upgrades, which are facility additions, or upgrades to existing facilities, that are needed to maintain the reliability of the PJM system. All facilities required for interconnection of a generation interconnection project must be designed to meet the technical specifications (on PJM web site) for the appropriate transmission owner.

In some instances a generator interconnection may not be responsible for 100% of the identified network upgrade cost because other transmission network uses, e.g. another generation interconnection or merchant transmission upgrade, may also contribute to the need for the same network reinforcement.

The System Impact Study estimates do not include the cost or time required to obtain property rights and permits for construction of the required facilities. The project developer is responsible for the right of way, real estate, and construction permit issues. For properties currently owned by Transmission Owners, the costs may be included in the study.

General

Harvey Solar I, LLC proposes to install PJM Project #AD2-067, a 150.0 MW (57.0 MW Capacity) Solar facility in Licking County, Ohio (see Figure 2). The point of interconnection is a direct connection to AEP's Centerburg 138 kV substation (see Figure 1).

The requested in service date is November 1, 2021.

Attachment Facilities

Point of Interconnection (Centerburg 138 kV substation)

To accommodate the interconnection at the Centerburg 138kV substation, the Centerburg 138 kV substation would have to be expanded to create a 138 kV ring bus with three (3) additional new circuit breakers. Installation of associated protection and control equipment, 138 kV line risers, SCADA, and 138 kV revenue metering will also be required. AEP reserves the right to specify the final acceptable configuration considering design practices, future expansion, and compliance requirements.

Note: The System Impact Study include a high-level review of the identified network impacts and development of conceptual means to accomplish the requested interconnection. Broader involvement of various engineering disciplines and other AEP stakeholders to address details of the required upgrades and proposed attachment facilities does not occur until the Facilities Study. However, even at a conceptual level, it should be noted that the expansion and reconfiguration required to accomplish the proposed connection at the Centerburg station will likely present challenges, as the existing station facilities are bounded on two sides by existing Distribution and Transmission facilities, a developed property on a third side, and a stream on the fourth side.

Direct Connection to Centerburg 138 kV Substation Work and Cost:

- Install three (3) additional new 138 kV circuit breakers at Centerburg 138 kV substation to expand the substation and create a 138 kV ring bus (see Figure 1). Installation of associated protection and control equipment and SCADA will also be required.

Estimated Station Cost: \$6,000,000

Non-Direct Connection Cost Estimate

The total preliminary cost estimate for Non-Direct Connection work is given in the following table below:

For AEP building Non-Direct Connection cost estimates:

Description	Estimated Cost
138 kV Revenue Metering	\$250,000
Upgrade line protection and controls at the Trent 138 kV substation	\$250,000
Upgrade line protection and controls at the Conesville 138 kV substation	\$250,000
Total	\$750,000

Table 1

Interconnection Customer Requirements

It is understood that Harvey Solar I is responsible for all costs associated with this interconnection. The costs above are reimbursable to AEP. The cost of Harvey Solar I generating plant and the costs for the line connecting the generating plant to the Centerburg 138 kV substation are not included in this report; these are assumed to be Harvey Solar I's responsibility.

The Generation Interconnection Agreement does not in or by itself establish a requirement for American Electric Power to provide power for consumption at the developer's facilities. A separate agreement may be reached with the local utility that provides service in the area to ensure that infrastructure is in place to meet this demand and proper metering equipment is installed. It is the responsibility of the developer to contact the local service provider to determine if a local service agreement is required.

Requirement from the PJM Open Access Transmission Tariff:

1. An Interconnection Customer entering the New Services Queue on or after October 1, 2012 with a proposed new Customer Facility that has a Maximum Facility Output equal to or greater than 100 MW shall install and maintain, at its expense, phasor measurement units (PMUs). See Section 8.5.3 of Appendix 2 to the Interconnection Service Agreement as well as section 4.3 of PJM Manual 14D for additional information.
2. The Interconnection Customer may be required to install and/or pay for metering as necessary to properly track real time output of the facility as well as installing metering which shall be used for billing purposes. See Section 8 of Appendix 2 to the Interconnection Service Agreement as well as Section 4 of PJM Manual 14D for additional information.

Revenue Metering and SCADA Requirements

PJM Requirements

The Interconnection Customer will be required to install equipment necessary to provide Revenue Metering (KWH, KVARH) and real time data (KW, KVAR) for IC's generating Resource. See PJM Manuals M-01 and M-14D, and PJM Tariff Sections 24.1 and 24.2.

AEP Requirements

The Interconnection Customer will be required to comply with all AEP Revenue Metering Requirements for Generation Interconnection Customers. The Revenue Metering Requirements may be found within the "Requirements for Connection of New Facilities or Changes to Existing Facilities Connected to the AEP Transmission System" document located at the following link:

<http://www.pjm.com/~media/planning/plan-standards/private-aep/aep-interconnection-requirements.ashx>

Network Impacts

The Queue Project AD2-067 was evaluated as a 150.0 MW (Capacity 57.0 MW) injection into the Centerburg 138 kV substation in the AEP area. Project AD2-067 was evaluated for compliance with applicable reliability planning criteria (PJM, NERC, NERC Regional Reliability Councils, and Transmission Owners). Project AD2-067 was studied with a commercial probability of 100%. Potential network impacts were as follows:

Summer Peak Analysis - 2021

Generator Deliverability

(Single or N-1 contingencies for the Capacity portion only of the interconnection)

None

Multiple Facility Contingency

(Double Circuit Tower Line, Fault with a Stuck Breaker, and Bus Fault contingencies for the full energy output)

None

Contribution to Previously Identified Overloads

(This project contributes to the following contingency overloads, i.e. "Network Impacts", identified for earlier generation or transmission interconnection projects in the PJM Queue)

None

Steady-State Voltage Requirements

(Results of the steady-state voltage studies should be inserted here)

None

Stability and Reactive Power Requirement

(Results of the dynamic studies should be inserted here)

No problems identified but should be noted that even with the proposed ring bus at Centerburg, AD2-067 can become radial through the 34 kV system during certain N-2 configurations:

- At Trent 34 kV when Centerburg-Conesville and Trent-Berkshire are both out
- At Trent and Berkshire 34 kV when Centerburg-Conesville and Berkshire-Berrywood both out
- At Trent, Berkshire, and Berrywood 69 kV when Centerburg-Conesville and Berrywood-Delaware both out

Short Circuit

(Summary of impacted circuit breakers)

New circuit breakers found to be over-duty:

None

Affected System Analysis & Mitigation

LGEE Impacts:

None

MISO Impacts:

No impact in the preliminary study but MISO will be performing a retool. Study results will be addressed in the Facilities Study.

Duke, Progress & TVA Impacts:

None

OVEC Impacts:

None

Delivery of Energy Portion of Interconnection Request

PJM also studied the delivery of the energy portion of this interconnection request. Any problems identified below are likely to result in operational restrictions to the project under study. The developer can proceed with network upgrades to eliminate the operational restriction at their discretion by submitting a Merchant Transmission Interconnection request.

Only the most severely overloaded conditions are listed. There is no guarantee of full delivery of energy for this project by fixing only the conditions listed in this section. With a Transmission Interconnection Request, a subsequent analysis will be performed, which will study all overload conditions associated with the overloaded element(s) identified.

None

New System Reinforcements

(Upgrades required to mitigate reliability criteria violations, i.e. Network Impacts, initially caused by the addition of this project generation)

None

Contribution to Previously Identified System Reinforcements

(Overloads initially caused by prior Queue positions with additional contribution to overloading by this project. This project may have a % allocation cost responsibility which will be calculated and reported for the Impact Study)

(Summary form of Cost allocation for transmission lines and transformers will be inserted here if any)

None

Schedule

It is anticipated that the time between receipt of executed agreements and Commercial Operation may range from 12 to 18 months if no line work is required. If line work is required, construction time would be between 24 to 36 months after signing an interconnection agreement.

Conclusion

Based upon the results of this System Impact Study, the construction of the 150.0 MW (57.0 MW Capacity) solar generating facility of Harvey Solar I (PJM Project #AD2-067) will require the following additional interconnection charges. This plan of service will interconnect the proposed solar generating facility in a manner that will provide operational reliability and flexibility to both the AEP system and the Harvey Solar I solar generating facility.

Cost Breakdown for Point of Interconnection (Centerburg 138 kV Substation)		
Attachment Cost	Installation of three (3) 138 kV circuit breakers at the Centerburg 138 kV substation and installation of associated protection and control equipment	\$6,000,000
Non-Direct Connection Cost Estimate	138 kV Revenue Metering	\$250,000
	Upgrade line protection and controls at the Trent 138 kV substation	\$250,000
	Upgrade line protection and controls at the Conesville 138 kV substation	\$250,000
Total Estimated Cost for Project AD2-067		\$6,750,000

Table 2

The estimates are preliminary in nature, as they were determined without the benefit of detailed engineering studies. Final estimates will require an on-site review and coordination to determine final construction requirements.

Figure 1: Point of Interconnection (Centerburg 138 kV Substation)
One-Line Diagram

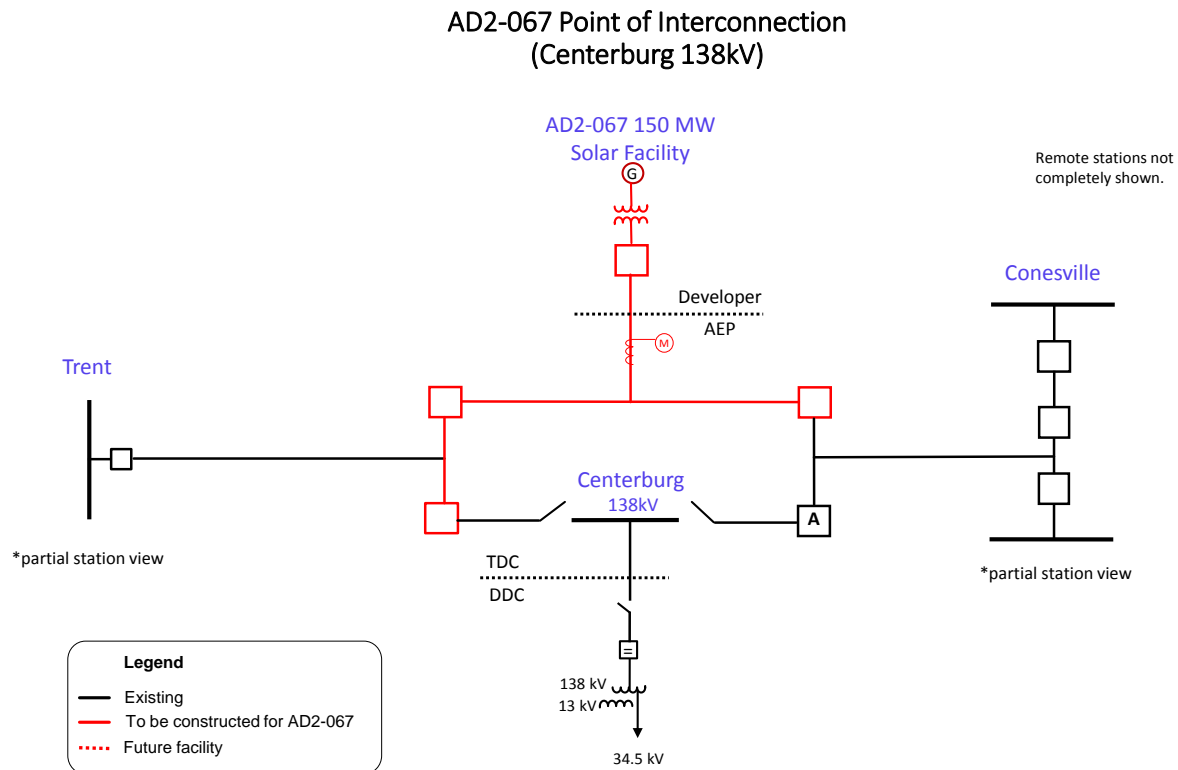


Figure 2: Point of Interconnection (Centerburg 138 kV Substation)

