



**Generation Interconnection
System Impact Study Report
for
Queue Project AE2-082
ENGLISHTOWN-WYCKOFF 34.5 KV SOLAR
3.4 MW Capacity / 7 MW Energy**

February 2020

Table of Contents

1	Introduction.....	4
2	Preface.....	4
3	General	5
4	Point of Interconnection.....	6
5	Cost Summary	6
6	Transmission Owner Scope of Work	8
6.1	Attachment Facilities.....	8
6.2	Direct Connection Cost Estimate.....	8
6.3	Non-Direct Connection Cost Estimate.....	8
7	Schedule.....	10
8	Transmission Owner Analysis.....	11
8.1	Power Flow Analysis	11
9	Interconnection Customer Requirements.....	12
9.1	System Protection.....	12
9.2	Compliance Issues and Interconnection Customer Requirements	12
9.3	Power Factor Requirements.....	12
10	Revenue Metering and SCADA Requirements	13
10.1	PJM Requirements	13
10.1.1	Meteorological Data Reporting Requirement.....	13
10.2	FirstEnergy Requirements	13
11	Network Impacts.....	14
12	Generation Deliverability	16
13	Multiple Facility Contingency	16
14	Contribution to Previously Identified Overloads	16
15	Potential Congestion due to Local Energy Deliverability.....	16
16	System Reinforcements:	17
17	Affected Systems	19
18	Short Circuit.....	21
19	Stability Analysis and Reactive Power Assessment.....	23
20	Light Load Analysis	25
21	Attachment One: One Line Diagram.....	26

22	Attachment Two: Project Location.....	27
----	---------------------------------------	----

1 Introduction

This System Impact Study has been prepared in accordance with the PJM Open Access Transmission Tariff, 205, as well as the System Impact Study Agreement between **NJ Solar 2000 LLC**, the Interconnection Customer (IC), and PJM Interconnection, LLC (PJM), Transmission Provider (TP). The Interconnected Transmission Owner (ITO) is Jersey Central Power & Light Company (JCPL).

2 Preface

The intent of the System Impact Study is to determine a plan, with approximate cost and construction time estimates, to connect the subject generation interconnection project to the PJM network at a location specified by the Interconnection Customer. As a requirement for interconnection, the Interconnection Customer may be responsible for the cost of constructing: Network Upgrades, which are facility additions, or upgrades to existing facilities, that are needed to maintain the reliability of the PJM system. All facilities required for interconnection of a generation interconnection project must be designed to meet the technical specifications (on PJM web site) for the appropriate transmission owner.

In some instances an Interconnection Customer may not be responsible for 100% of the identified network upgrade cost because other transmission network uses, e.g. another generation interconnection or merchant transmission upgrade, may also contribute to the need for the same network reinforcement. The possibility of sharing the reinforcement costs with other projects may be identified in the Feasibility Study, but the actual allocation will be deferred until the System Impact Study is performed.

The System Impact Study estimates do not include the feasibility, cost, or time required to obtain property rights and permits for construction of the required facilities. The project developer is responsible for the right of way, real estate, and construction permit issues. For properties currently owned by Transmission Owners, the costs may be included in the study.

The Interconnection Customer seeking to interconnect a wind or solar generation facility shall maintain meteorological data facilities as well as provide that meteorological data which is required per Schedule H to the Interconnection Service Agreement and Section 8 of Manual 14D.

3 General

The Interconnection Customer (IC), has proposed a Solar generating facility located in Monmouth County, New Jersey. The installed facilities will have a total capability of 7 MW with 3.4 MW of this output being recognized by PJM as Capacity. The proposed in-service date for this project is December 1, 2020. This study does not imply a TO commitment to this in-service date.

Queue Number	AE2-082
Project Name	ENGLISHTOWN-WYCKOFF 34.5 KV SOLAR
Interconnection Customer	NJ Solar 2000 LLC
State	New Jersey
County	Monmouth
Transmission Owner	JCPL
MFO	7
MWE	7
MWC	3.4
Fuel	Solar
Basecase Study Year	2022

4 Point of Interconnection

The interconnection of the project to the JCPL system will be accomplished by tapping the Englishtown – Wyckoff Street 34.5 kV line. The transmission line tap will be located approximately 1 mile from Englishtown substation and 2 miles from Wyckoff Street substation. The IC will be responsible for acquiring all easements, properties, and permits that may be required to construct both the new interconnection line tap and the associated attachment facilities. The project will also require direct connection upgrades to tap the Englishtown – Wyckoff Street 34.5 kV line.

Attachment 1 shows a one-line diagram of the proposed primary direct connection facilities for the AE2-082 generation project to connect to the FirstEnergy (“FE”) transmission system. **Attachment 2** provides the proposed location for the point of interconnection. IC will be responsible for constructing all of the facilities on its side of the POI, including the attachment facilities which connect the generator to the FE transmission system’s direct connection facilities.

5 Cost Summary

The AE2-082 project will be responsible for the following costs:

Description	Total Cost
Attachment Facilities	\$356,600
Direct Connection Network Upgrade	\$0
Non Direct Connection Network Upgrades	\$1,875,200
New System Upgrades	\$0
Contribution to Previously Identified Upgrades	\$0
Total Costs	\$2,231,800

The costs provided above exclude the Contribution in Aid of Construction (“CIAC”) Federal Income Tax Gross Up charge. If, at a future date, it is determined that the CIAC Federal Income Tax Gross charge is required, the Transmission Owner shall be reimbursed by the Interconnection Customer for such taxes.

The required Attachment Facilities and Direct and Non-Direct Connection work for the interconnection of the AE2-082 generation project to the FE Transmission System is detailed in the following sections. The associated one-line with the generation project Attachment Facilities and the Primary Direct and Non-Direct Connection facilities are shown in Attachment 1.

Note: PJM Open Access Transmission Tariff (OATT) section 217.3A outline cost allocation rules. The rules are further clarified in PJM Manual 14A Attachment B. The allocation of costs for a network upgrade will start with the first Queue project to cause the need for the upgrade. Later queue projects will receive cost

allocation contingent on their contribution to the violation and are allocated to the queues that have not closed less than 5 years following the execution of the first Interconnection Service Agreement which identifies the need for this upgrade.

6 Transmission Owner Scope of Work

The interconnection of the project to the JCPL system will be accomplished by tapping the Englishtown – Wyckoff Street 34.5 kV line. The transmission line tap will be located approximately 1 mile from Englishtown substation and 2 miles from Wyckoff Street substation. The IC will be responsible for acquiring all easements, properties, and permits that may be required to construct both the new interconnection line tap and the associated attachment facilities. The project will also require direct connection upgrades to tap the Englishtown – Wyckoff Street 34.5 kV line.

6.1 Attachment Facilities

The total preliminary cost estimate for the Attachment work is given in the table below. These costs do not include CIAC Tax Gross-up.

Description	Total Cost
Install Attachment Facilities associated with the tap at Englishtown – Wyckoff Street (I-87) 34.5 kV line to interconnect to AE2-082 7 MW solar generator at Englishtown – Wyckoff Street (I-87) 34.5kV Line tap to AE2-082 solar generation	\$ 281,600
Review relay settings, nameplates, and drawings at AE2-082 generation substation	\$ 75,000
Total Attachment Facility Costs	\$356,600

6.2 Direct Connection Cost Estimate

The total preliminary cost estimate for the Direct Connection work is given in the table below. These costs do not include CIAC Tax Gross-up.

Description	Total Cost
	\$0
Total Direct Connection Facility Costs	\$0

6.3 Non-Direct Connection Cost Estimate

The total preliminary cost estimate for the Non-Direct Connection work is given in the table below. These costs do not include CIAC Tax Gross-up.

Description	Total Cost
Tap at Englishtown – Wyckoff Street (I-87) 34.5 kV Line to interconnect to AE2-082 7 MW solar generator at Englishtown – Wyckoff Street (I-87) 34.5 kV Line tap to AE2-082 solar generation	\$ 1,256,100

Description	Total Cost
Install in line tangent structures on the A53 Englishtown-Gravel Hill Road 34.5 kV line at Englishtown – Wyckoff Street (I-87) 34.5 kV Line tap to AE2-082 Solar Generation	\$ 224,100
Project Management, Environmental, Forestry and Real Estate.	\$ 360,000
AE2-082 interconnection (Wyckoff Street I-87) 34.5kV Line relay setting changes at Englishtown Substation	\$ 17,500
AE2-082 interconnection (Englishtown I-87) 34.5 kV Line relay setting changes at Wyckoff Street Substation	\$ 17,500
Total Non-Direct Connection Facility Costs	\$1,875,200

7 Schedule

Based on the scope of work for the Attachment Facilities and the Direct and Non-Direct Connection facilities, it is expected to take a minimum of **twelve (12)** months after the signing of an Interconnection Construction Service Agreement to complete the installation. This includes the requirement for the IC to make a preliminary payment that compensates FE for the first three months of the engineering design work that is related to the Attachment Facilities. Full initial deposit will be required for the Non-Direct Connection work. This assumes that there will be no environmental issues with any of the new properties associated with this project, that there will be no delays in acquiring the necessary permits for implementing the defined interconnection work, and that all transmission system outages will be allowed when requested.

8 Transmission Owner Analysis

8.1 Power Flow Analysis

FE performed an analysis of its underlying transmission <100 kV system. The AE2-082 project did not contribute to any overloads on the FE transmission system.

9 Interconnection Customer Requirements

9.1 System Protection

The IC must design its Customer Facilities in accordance with all applicable standards, including the standards in FE's "Requirements for Transmission Connected Facilities" document located at: <http://www.pjm.com/planning/design-engineering/to-tech-standards/private-firstenergy.aspx>. Preliminary Protection requirements will be provided as part of the Facilities Study. Detailed Protection Requirements will be provided once the project enters the construction phase.

The IC has requested a non-standard GSU transformer winding configuration. Further evaluation and review of the non-standard GSU transformer configuration will be part of the System Impact Study.

9.2 Compliance Issues and Interconnection Customer Requirements

The proposed Customer Facilities must be designed in accordance with FE's "Requirements for Transmission Connected Facilities" document located at: <http://www.pjm.com/planning/design-engineering/to-tech-standards/private-firstenergy.aspx>. In particular, the IC is responsible for the following:

1. The purchase and installation of a fully rated 34.5 kV circuit breaker to protect the AE2-082 generator lead line. A single circuit breaker must be used to protect this line; if the project has several GSU transformers, the individual GSU transformer breakers cannot be used to protect this line.
2. The purchase and installation of the minimum required FE generation interconnection relaying and control facilities. This includes over/under voltage protection, over/under frequency protection, and zero sequence voltage protection relays.
3. The purchase and installation of supervisory control and data acquisition ("SCADA") equipment to provide information in a compatible format to the FE Transmission System Control Center.
4. Compliance with the FE and PJM generator power factor and voltage control requirements.
5. The execution of a back-up service agreement to serve the customer load supplied from the AE2-082 generation project metering point when the units are out-of-service. This assumes the intent of the IC is to net the generation with the load.

The IC will also be required to meet all PJM, ReliabilityFirst, and NERC reliability criteria and operating procedures for standards compliance. For example, the IC will need to properly locate and report the over and under voltage and over and under frequency system protection elements for its units as well as the submission of the generator model and protection data required to satisfy the PJM and ReliabilityFirst audits. Failure to comply with these requirements may result in a disconnection of service if the violation is found to compromise the reliability of the FE system.

9.3 Power Factor Requirements

The IC shall design its non-synchronous Customer Facility with the ability to maintain a power factor of at least 0.95 leading (absorbing VARs) to 0.95 lagging (supplying VARs) measured at the high-side of the facility substation transformer(s) connected to the FE transmission system.

10 Revenue Metering and SCADA Requirements

10.1 PJM Requirements

The Interconnection Customer will be required to install equipment necessary to provide Revenue Metering (KWH, KVARH) and real time data (KW, KVAR) for IC's generating Resource. See PJM Manuals M-01 and M-14D, and PJM Tariff Section 8 of Attachment O.

10.1.1 Meteorological Data Reporting Requirement

The solar generation facility shall provide the Transmission Provider with site-specific meteorological data including:

- Temperature (degrees Fahrenheit)
- Atmospheric pressure (hectopascals)
- Irradiance
- Forced outage data

10.2 FirstEnergy Requirements

The IC will be required to comply with all FE revenue metering requirements for generation interconnection customers which can be found in FE's "Requirements for Transmission Connected Facilities" document located at: <http://www.pjm.com/planning/design-engineering/to-tech-standards/private-firstenergy.aspx>.

11 Network Impacts

The Queue Project AE2-082 was evaluated as a 7.0 MW (Capacity 3.4 MW) injection at the tap of the Englishtown to Rt. 33 34.5 kV line in the JCPL area. Project AE2-082 was evaluated for compliance with applicable reliability planning criteria (PJM, NERC, NERC Regional Reliability Councils, and Transmission Owners). Project AE2-082 was studied with a commercial probability of 100%. Potential network impacts were as follows:

Summer Peak Load Flow

12 Generation Deliverability

(Single or N-1 contingencies for the Capacity portion only of the interconnection)

None

13 Multiple Facility Contingency

(Double Circuit Tower Line, Fault with a Stuck Breaker, and Bus Fault contingencies for the full energy output)

None

14 Contribution to Previously Identified Overloads

(This project contributes to the following contingency overloads, i.e. "Network Impacts", identified for earlier generation or transmission interconnection projects in the PJM Queue)

None

15 Potential Congestion due to Local Energy Deliverability

PJM also studied the delivery of the energy portion of this interconnection request. Any problems identified below are likely to result in operational restrictions to the project under study. The developer can proceed with network upgrades to eliminate the operational restriction at their discretion by submitting a Merchant Transmission Interconnection request.

Note: Only the most severely overloaded conditions are listed below. There is no guarantee of full delivery of energy for this project by fixing only the conditions listed in this section. With a Transmission Interconnection Request, a subsequent analysis will be performed which shall study all overload conditions associated with the overloaded element(s) identified.

None

16 System Reinforcements:

None

Affected Systems

17 Affected Systems

None

Short Circuit

18 Short Circuit

The following Breakers are overduty:

None

Stability

19 Stability Analysis and Reactive Power Assessment


Not Required.

Light Load


20 Light Load Analysis

Not required for solar projects.

21 Attachment One: One Line Diagram

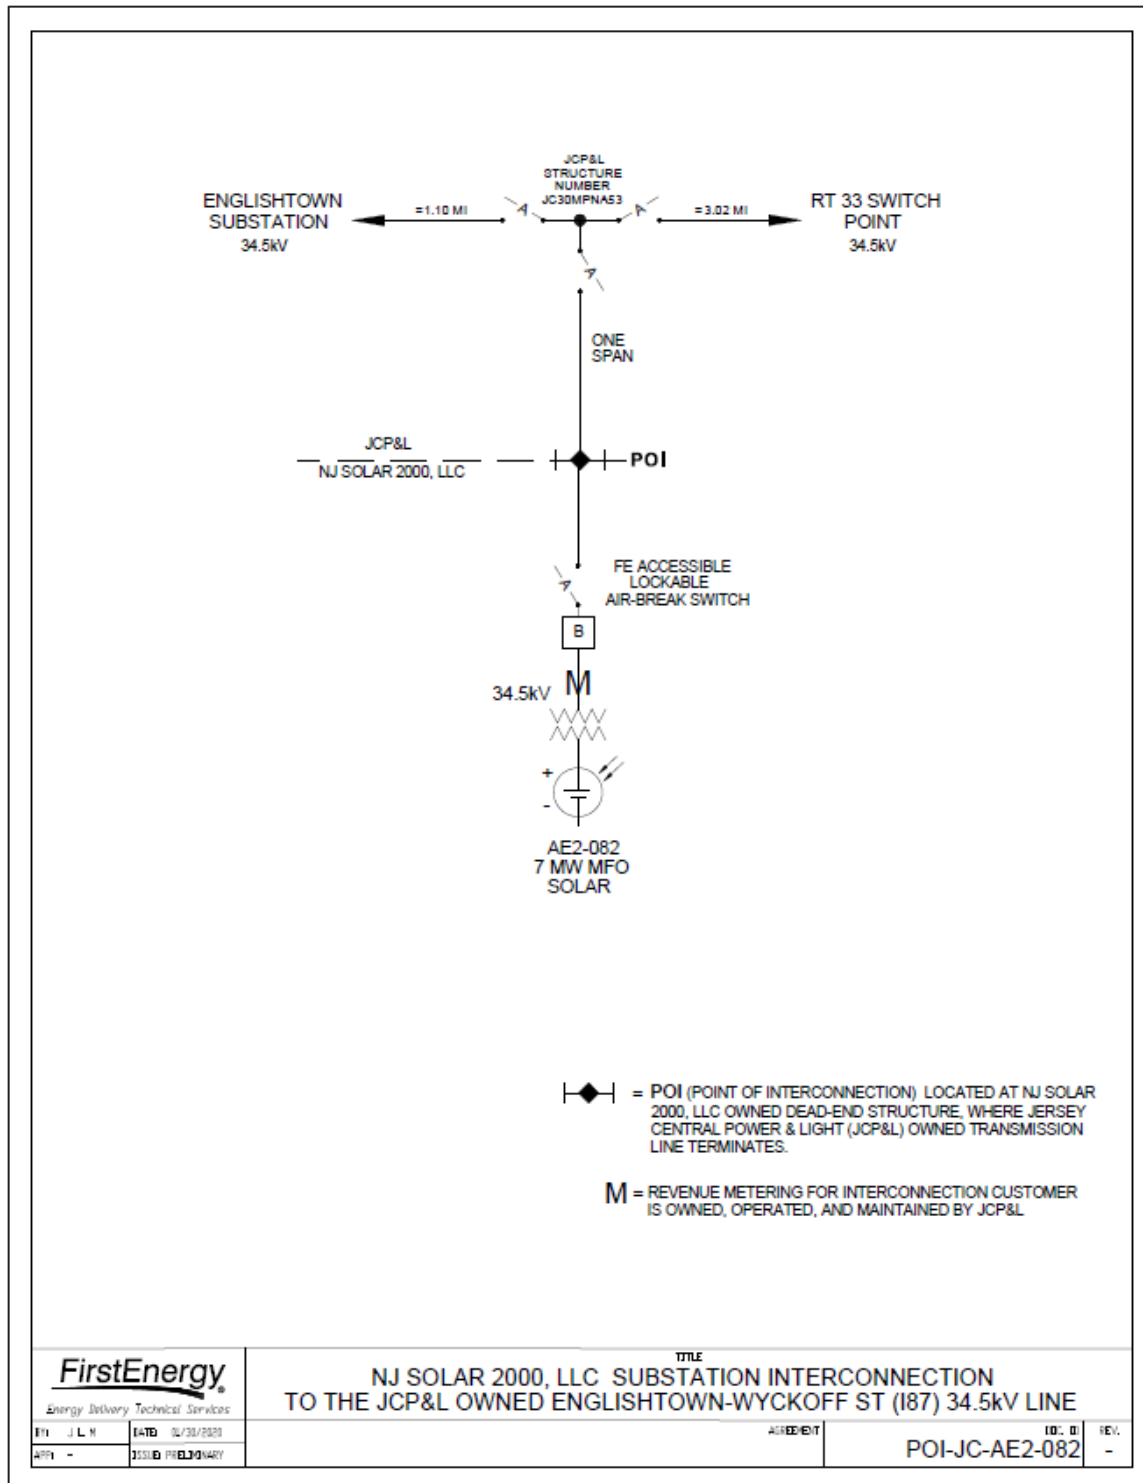

22 Attachment Two: Project Location

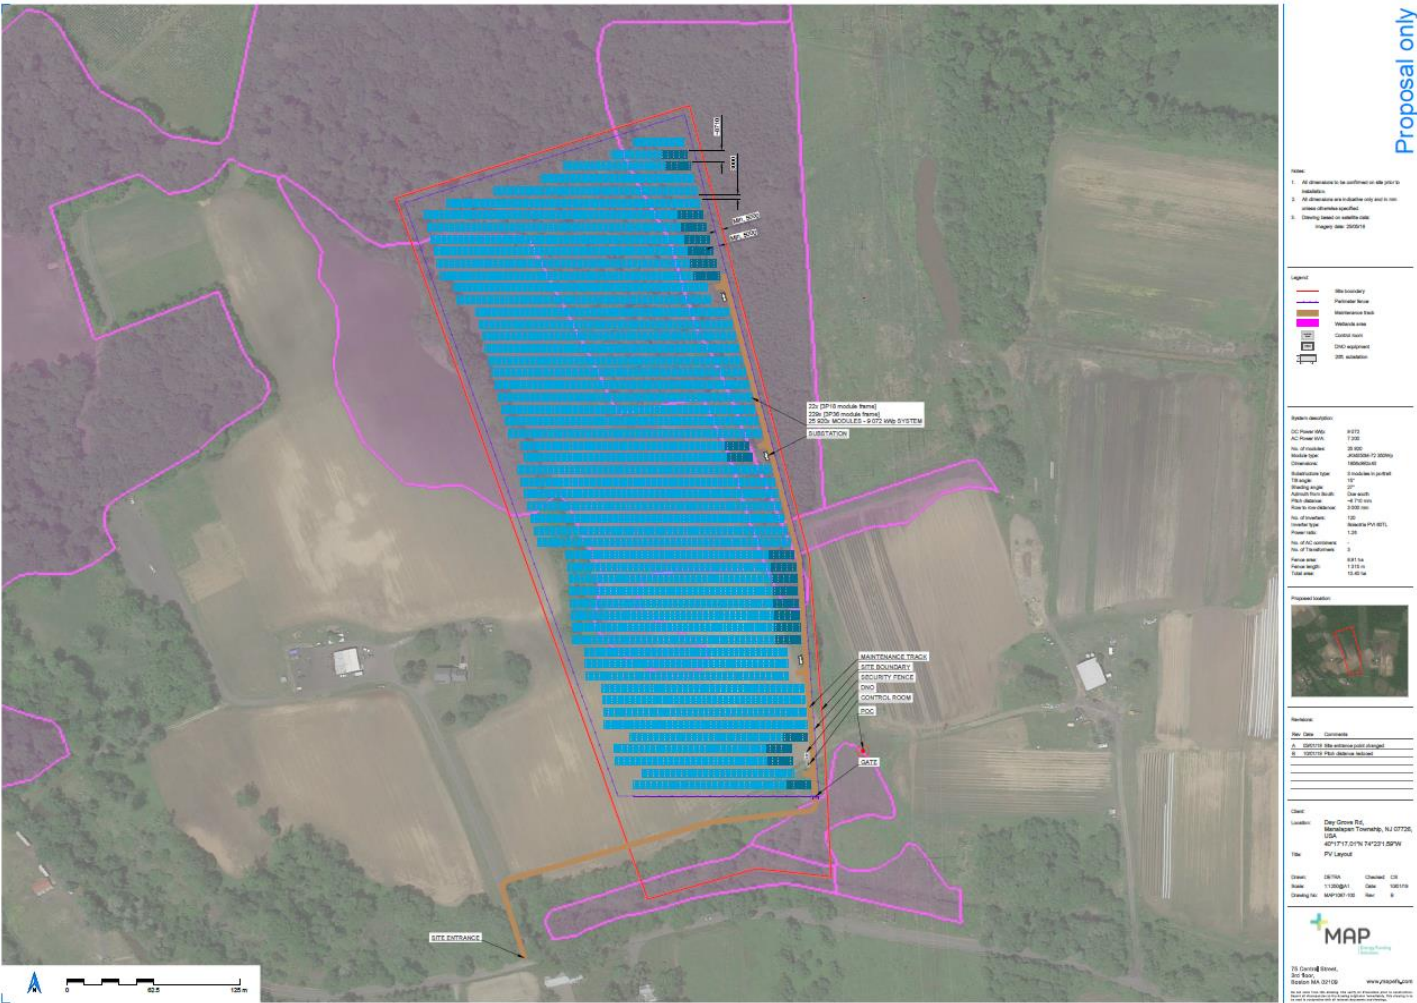

Proposal only