



**Generation Interconnection
System Impact Study Report
for
Queue Project AG1-103
CLAYTON-WILLIAMSTOWN 69 KV
0 MW Capacity / 0 MW Energy**

August 2021

Table of Contents

1	Introduction.....	4
2	Preface.....	4
3	General	5
4	Point of Interconnection.....	6
5	Cost Summary	6
6	Transmission Owner Scope of Work	7
7	Schedule.....	7
8	Transmission Owner Analysis.....	7
9	Interconnection Customer Requirements.....	7
10	Revenue Metering and SCADA Requirements	7
10.1	PJM Requirements	7
10.2	Interconnected Transmission Owner Requirements.....	7
11	Summer Peak Analysis	8
11.1	Generation Deliverability	8
11.2	Multiple Facility Contingency	8
11.3	Contribution to Previously Identified Overloads.....	8
11.4	Steady-State Voltage Requirements.....	8
11.5	Potential Congestion due to Local Energy Deliverability.....	8
11.6	System Reinforcements.....	9
11.7	Flow Gate Details.....	9
11.8	Queue Dependencies	9
11.9	Contingency Descriptions.....	9
12	Light Load Analysis.....	10
12.1	Light Load Deliverability	10
12.2	Multiple Facility Contingency	10
12.3	Contribution to Previously Identified Overloads.....	10
12.4	Potential Congestion due to Local Energy Deliverability.....	10
12.5	System Reinforcements.....	11
12.6	Flow Gate Details.....	11
13	Short Circuit Analysis.....	12
13.1	System Reinforcements - Short Circuit.....	12

14	Stability and Reactive Power	12
15	Affected Systems	12
16	Attachment 1: One Line Diagram	13

1 Introduction

This System Impact Study has been prepared in accordance with the PJM Open Access Transmission Tariff, 205, as well as the System Impact Study Agreement between the Interconnection Customer (IC), and PJM Interconnection, LLC (PJM), Transmission Provider (TP). The Interconnected Transmission Owner (ITO) is AEC.

2 Preface

The intent of the System Impact Study is to determine a plan, with approximate cost and construction time estimates, to connect the subject generation interconnection project to the PJM network at a location specified by the Interconnection Customer. As a requirement for interconnection, the Interconnection Customer may be responsible for the cost of constructing: Network Upgrades, which are facility additions, or upgrades to existing facilities, that are needed to maintain the reliability of the PJM system. All facilities required for interconnection of a generation interconnection project must be designed to meet the technical specifications (on PJM web site) for the appropriate transmission owner.

In some instances an Interconnection Customer may not be responsible for 100% of the identified network upgrade cost because other transmission network uses, e.g. another generation interconnection or merchant transmission upgrade, may also contribute to the need for the same network reinforcement. The possibility of sharing the reinforcement costs with other projects may be identified in the Feasibility Study, but the actual allocation will be deferred until the System Impact Study is performed.

The System Impact Study estimates do not include the feasibility, cost, or time required to obtain property rights and permits for construction of the required facilities. The project developer is responsible for the right of way, real estate, and construction permit issues. For properties currently owned by Transmission Owners, the costs may be included in the study.

3 General

The Interconnection Customer (IC) has proposed an uprate to a planned/existing Solar generating facility located in Gloucester, New Jersey. This project is an increase to the Interconnection Customer's AE2-334 project, which will share the same point of interconnection. The AG1-103 queue position is a 0 MW uprate (0 MW Capacity uprate) to the previous project. The total installed facilities will have a capability of 44 MW with 26.4 MW of this output being recognized by PJM as Capacity. The proposed in-service date for this uprate project is June 30, 2022. This study does not imply a TO commitment to this in-service date.

Queue Number	AG1-103
Project Name	CLAYTON-WILLIAMSTOWN 69 KV
State	New Jersey
County	Gloucester
Transmission Owner	AEC
MFO	44
MWE	0
MWC	0
Fuel	Storage
Basecase Study Year	2024

Any new service customers who can feasibly be commercially operable prior to June 1st of the basecase study year are required to request interim deliverability analysis.

4 Point of Interconnection

AG1-103 will interconnect with the AEC on Transmission system as an uprate to AE2-334, which taps the Clayton to Williamston 69 kV.

5 Cost Summary

The AG1-103 project will be responsible for the following costs:

Description	Total Cost
Total Physical Interconnection Costs	\$0
Allocation towards System Network Upgrade Costs*	\$0
Total Costs	\$0

*As your project progresses through the study process and other projects modify their request or withdraw, then your cost allocation could change.

This cost excludes a Federal Income Tax Gross Up charges. This tax may or may not be charged based on whether this project meets the eligibility requirements of IRS Notice 88-129. If at a future date it is determined that the Federal Income Tax Gross charge is required, the Transmission Owner shall be reimbursed by the Interconnection Customer for such taxes.

Note 1: PJM Open Access Transmission Tariff (OATT) section 217.3A outline cost allocation rules. The rules are further clarified in PJM Manual 14A Attachment B. The allocation of costs for a network upgrade will start with the first Queue project to cause the need for the upgrade. Later queue projects will receive cost allocation contingent on their contribution to the violation and are allocated to the queues that have not closed less than 5 years following the execution of the first Interconnection Service Agreement which identifies the need for this upgrade.

Note 2: For customers with System Reinforcements listed: If your present cost allocation to a System Reinforcement indicates \$0, then please be aware that as changes to the interconnection process occur, such as prior queued projects withdrawing from the queue, reducing in size, etc, the cost responsibilities can change and a cost allocation may be assigned to your project. In addition, although your present cost allocation to a System Reinforcement is presently \$0, your project may need this system reinforcement completed to be deliverable to the PJM system. If your project comes into service prior to completion of the system reinforcement, an interim deliverability study for your project will be required.

6 Transmission Owner Scope of Work

Refer to AE2-334.

7 Schedule

Refer to AE2-334.

8 Transmission Owner Analysis

None

9 Interconnection Customer Requirements

Refer to AE2-334.

10 Revenue Metering and SCADA Requirements

10.1 PJM Requirements

The Interconnection Customer will be required to install equipment necessary to provide Revenue Metering (KWH, KVARH) and real time data (KW, KVAR) for IC's generating Resource. See PJM Manuals M-01 and M-14D, and PJM Tariff Section 8 of Attachment O.

10.2 Interconnected Transmission Owner Requirements

The IC will be required to comply with all Interconnected Transmission Owner's revenue metering requirements for generation interconnection customers located at the following link:

<http://www.pjm.com/planning/design-engineering/to-tech-standards/>

Refer to AE2-334 for additional requirements.

11 Summer Peak Analysis

The Queue Project AG1-103 was evaluated as a 0 MW (Capacity 0 MW) injection as an uprate to AE2-334 which taps the Clayton to Williamston Tap in the AEC area. Project AG1-103 was evaluated for compliance with applicable reliability planning criteria (PJM, NERC, NERC Regional Reliability Councils, and Transmission Owners). Project AG1-103 was studied with a commercial probability of 100.0 %. Potential network impacts were as follows:

11.1 Generation Deliverability

(Single or N-1 contingencies for the Capacity portion only of the interconnection)

None

11.2 Multiple Facility Contingency

(Double Circuit Tower Line, Fault with a Stuck Breaker, and Bus Fault contingencies for the full energy output)

None

11.3 Contribution to Previously Identified Overloads

(This project contributes to the following contingency overloads, i.e. "Network Impacts", identified for earlier generation or transmission interconnection projects in the PJM Queue)

None

11.4 Steady-State Voltage Requirements

None

11.5 Potential Congestion due to Local Energy Deliverability

PJM also studied the delivery of the energy portion of this interconnection request. Any problems identified below are likely to result in operational restrictions to the project under study. The developer can proceed with network upgrades to eliminate the operational restriction at their discretion by submitting a Merchant Transmission Interconnection request.

Note: Only the most severely overloaded conditions are listed below. There is no guarantee of full delivery of energy for this project by fixing only the conditions listed in this section. With a Transmission Interconnection Request, a subsequent analysis will be performed which shall study all overload conditions associated with the overloaded element(s) identified.

None

11.6 System Reinforcements

None

11.7 Flow Gate Details

The following indices contain additional information about each facility presented in the body of the report. For each index, a description of the flowgate and its contingency was included for convenience. The intent of the indices is to provide more details on which projects/generators have contributions to the flowgate in question. All New Service Queue Requests, through the end of the Queue under study, that are contributors to a flowgate will be listed in the indices. Please note that there may be contributors that are subsequently queued after the queue under study that are not listed in the indices. Although this information is not used "as is" for cost allocation purposes, it can be used to gage the impact of other projects/generators. It should be noted the project/generator MW contributions presented in the body of the report are Full MW Impact contributions which are also noted in the indices column named "Full MW Impact", whereas the loading percentages reported in the body of the report, take into consideration the PJM Generator Deliverability Test rules such as commercial probability of each project as well as the ramping impact of "Adder" contributions. The MW Impact found and used in the analysis is shown in the indices column named "Gendeliv MW Impact".

None

11.8 Queue Dependencies

The Queue Projects below are listed in one or more indices for the overloads identified in your report. These projects contribute to the loading of the overloaded facilities identified in your report. The percent overload of a facility and cost allocation you may have towards a particular reinforcement could vary depending on the action of these earlier projects. The status of each project at the time of the analysis is presented in the table. This list may change as earlier projects withdraw or modify their requests.

None

11.9 Contingency Descriptions

None

12 Light Load Analysis

The Queue Project AG1-103 was evaluated as a 15.0 MW injection as an uprate to AE2-334 which taps the Clayton to Williamston Tap in the AEC area. Project AG1-103 was evaluated for compliance with applicable reliability planning criteria (PJM, NERC, NERC Regional Reliability Councils, and Transmission Owners). Project AG1-103 was studied with a commercial probability of 100.0 %. Potential network impacts were as follows:

12.1 Light Load Deliverability

(Single or N-1 contingencies)

None

12.2 Multiple Facility Contingency

(Double Circuit Tower Line, Fault with a Stuck Breaker, and Bus Fault contingencies)

None

12.3 Contribution to Previously Identified Overloads

(This project contributes to the following contingency overloads, i.e. "Network Impacts", identified for earlier generation or transmission interconnection projects in the PJM Queue)

None

12.4 Potential Congestion due to Local Energy Deliverability

PJM also studied the delivery of the energy portion of this interconnection request. Any problems identified below are likely to result in operational restrictions to the project under study. The developer can proceed with network upgrades to eliminate the operational restriction at their discretion by submitting a Merchant Transmission Interconnection request.

None

Note: Only the most severely overloaded conditions are listed below. There is no guarantee of full delivery of energy for this project by fixing only the conditions listed in this section. With a Transmission Interconnection Request, a subsequent analysis will be performed which shall study all overload conditions associated with the overloaded element(s) identified.

12.5 System Reinforcements

Note : For customers with System Reinforcements listed: If your present cost allocation to a System Reinforcement indicates \$0, then please be aware that as changes to the interconnection process occur, such as prior queued projects withdrawing from the queue, reducing in size, etc, the cost responsibilities can change and a cost allocation may be assigned to your project. In addition, although your present cost allocation to a System Reinforcement is presently \$0, your project may need this system reinforcement completed to be deliverable to the PJM system. If your project comes into service prior to completion of the system reinforcement, an interim deliverability study for your project will be required.

None

12.6 Flow Gate Details

The following indices contain additional information about each facility presented in the body of the report. For each index, a description of the flowgate and its contingency was included for convenience. The intent of the indices is to provide more details on which projects/generators have contributions to the flowgate in question. All New Service Queue Requests, through the end of the Queue under study, that are contributors to a flowgate will be listed in the indices. Please note that there may be contributors that are subsequently queued after the queue under study that are not listed in the indices. Although this information is not used "as is" for cost allocation purposes, it can be used to gage the impact of other projects/generators. It should be noted the project/generator MW contributions presented in the body of the report are Full MW Impact contributions which are also noted in the indices column named "Full MW Impact", whereas the loading percentages reported in the body of the report, take into consideration the PJM Generator Deliverability Test rules such as commercial probability of each project as well as the ramping impact of "Adder" contributions. The MW Impact found and used in the analysis is shown in the indices column named "Gendeliv MW Impact".

None.

13 Short Circuit Analysis

The following Breakers are overdutied:

None

13.1 System Reinforcements - Short Circuit

None


14 Stability and Reactive Power

To be determined in the Facilities Study Phase.

15 Affected Systems

None

16 Attachment 1: One Line Diagram

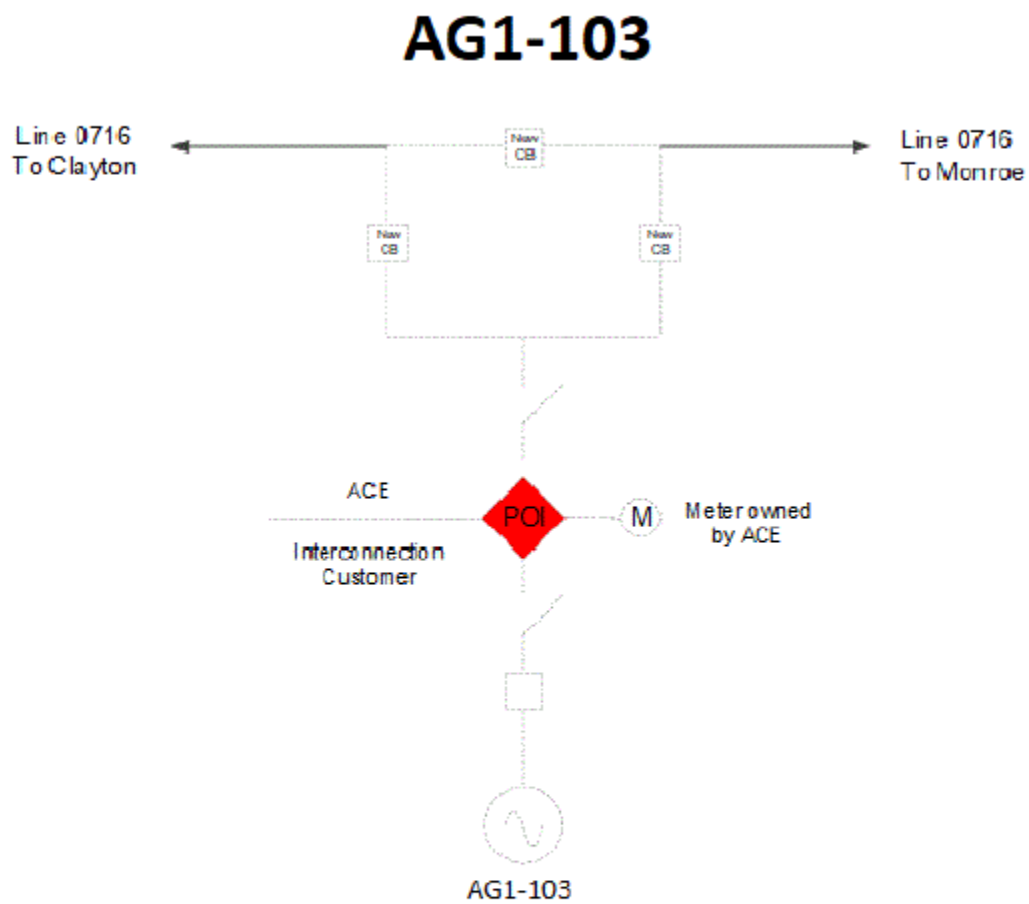

An Interconnection Customer circuit breaker will be required no more than 500 feet from the ACE substation.



Point of Interconnection