
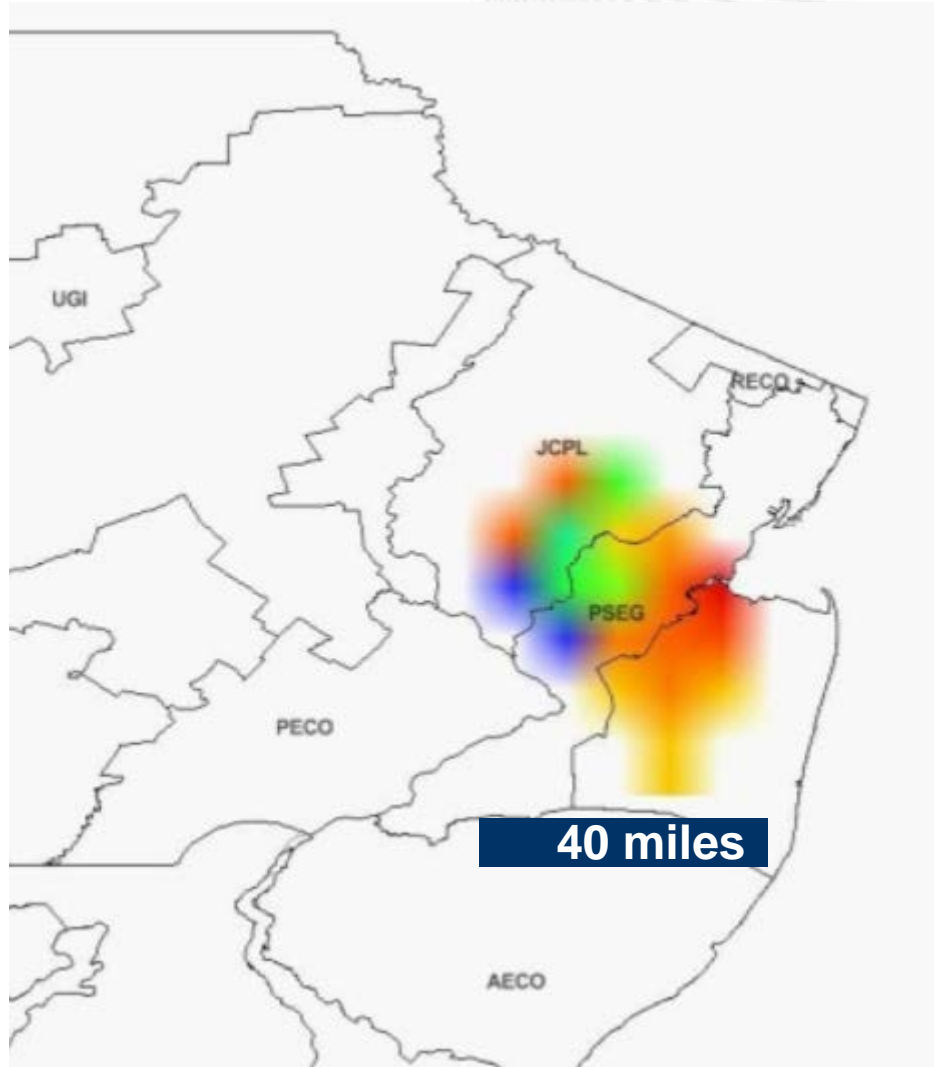


DER Update: “Ride Through” and IEEE 1547-2018

Andrew Levitt
Senior Market Strategist, Emerging
Markets

Transmission voltage (per unit)

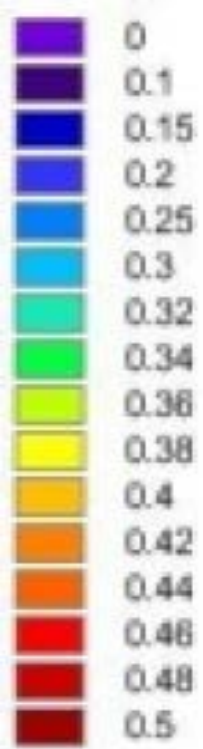


- Generator and line contingencies can cause abnormal conditions, e.g. significantly high or low voltage or frequency.
- "Ride Through" is the capability of a generator to remain connected during abnormal conditions.
- "Ride Through" requirements for large generators are essential for BES reliability.

Source: http://www.nerc.com/comm/PC/Integration%20of%20Variable%20Generation%20Task%20Force%2011/IVGTF17_PC_FinalDraft_December_clean.pdf


As small generators (i.e., “Distributed Energy Resources”) have proliferated, “Ride Through” requirements for DER have become essential.

Cumulative Non-wholesale Solar MW

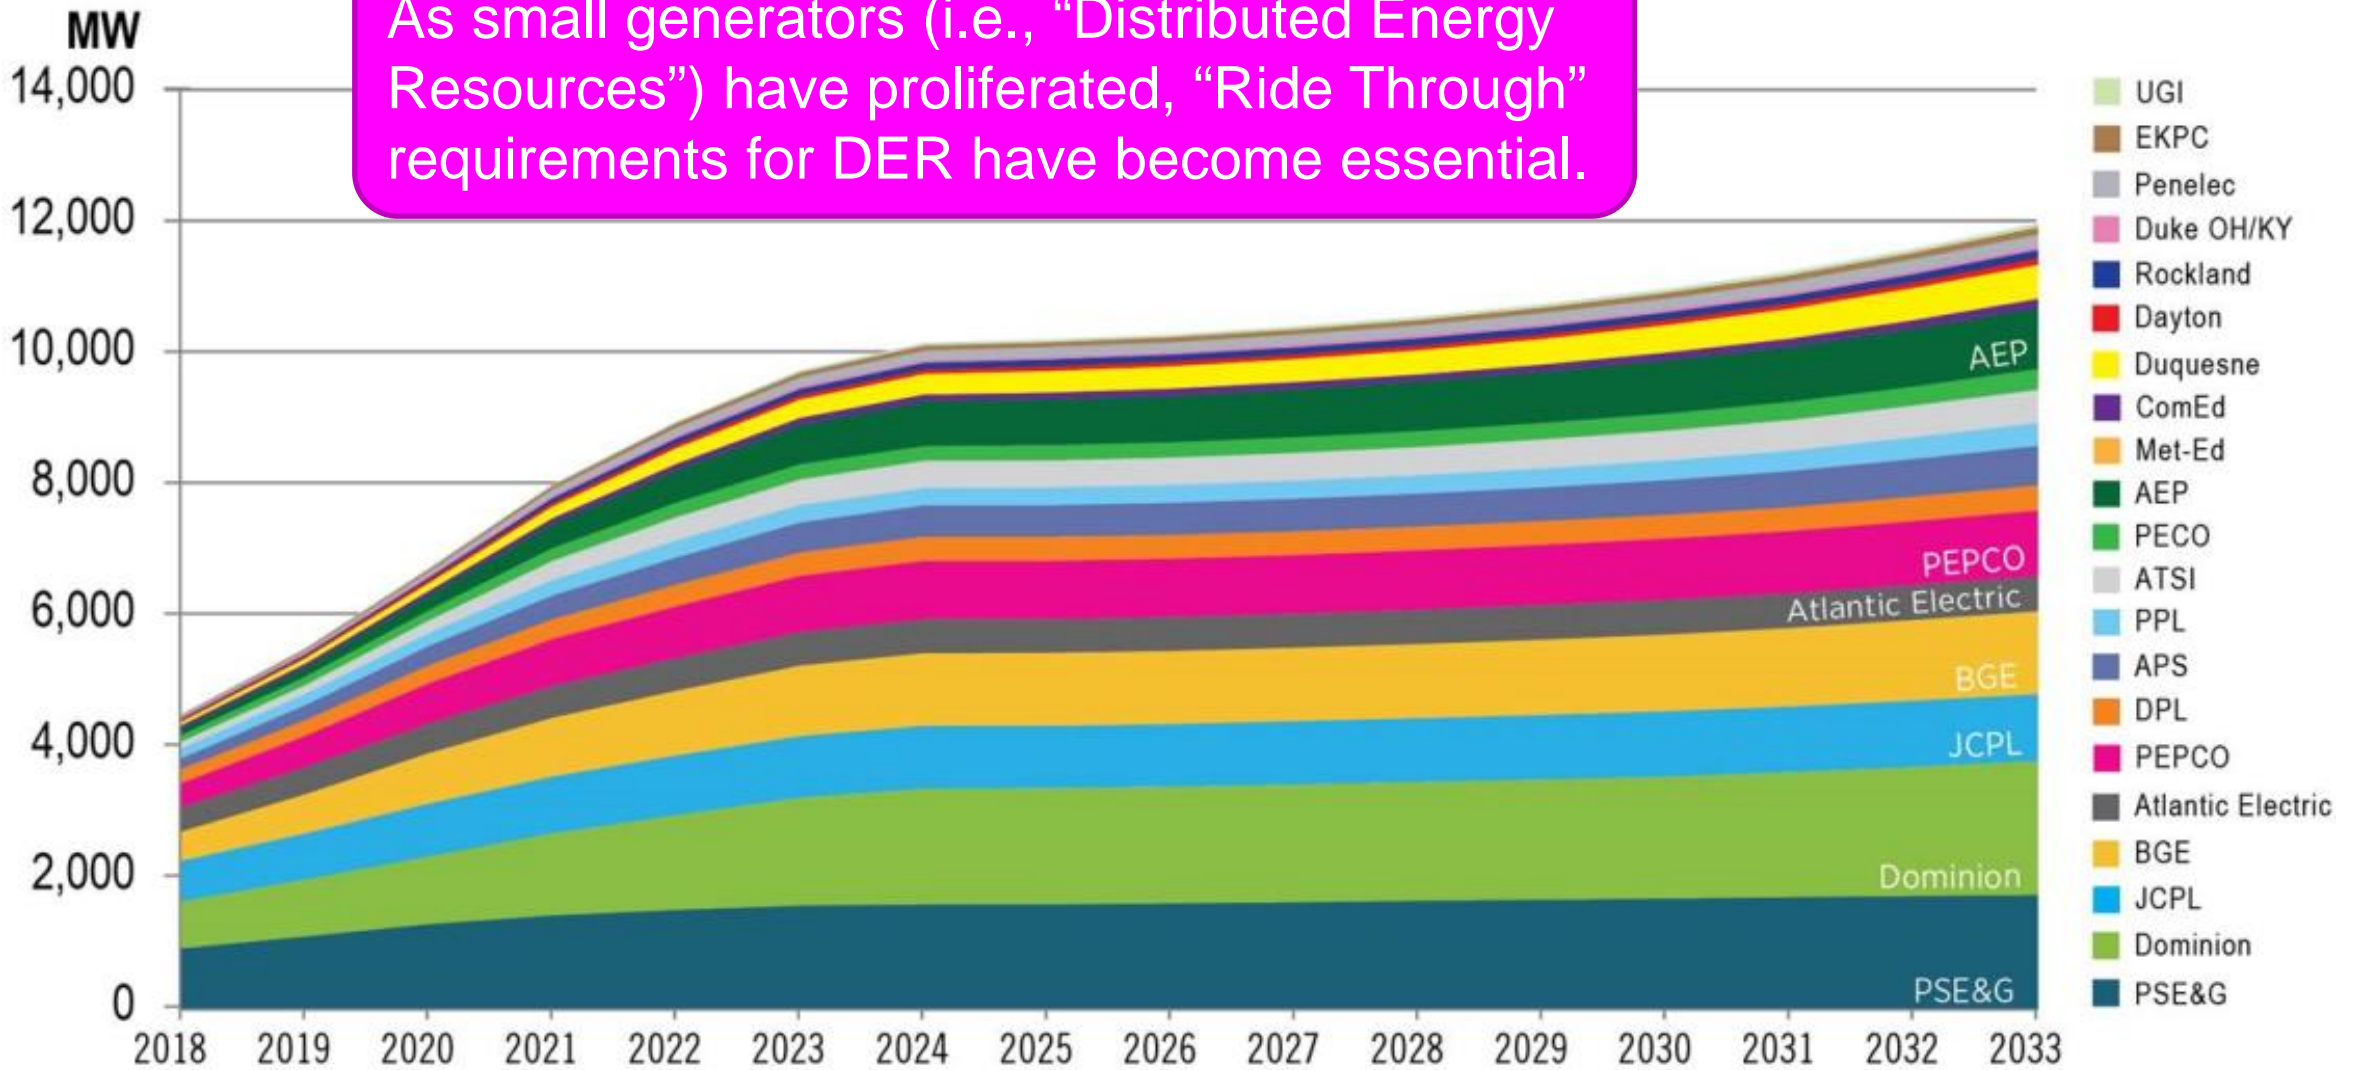

Distributed Energy Resources Lack "Ride Through" Requirement

- IEEE Standard 1547-2003 technical standard setting DER interconnection requirements.
- Universally referenced in federal and state law, regulations, and utility rules
- Lacks "ride through" requirement.

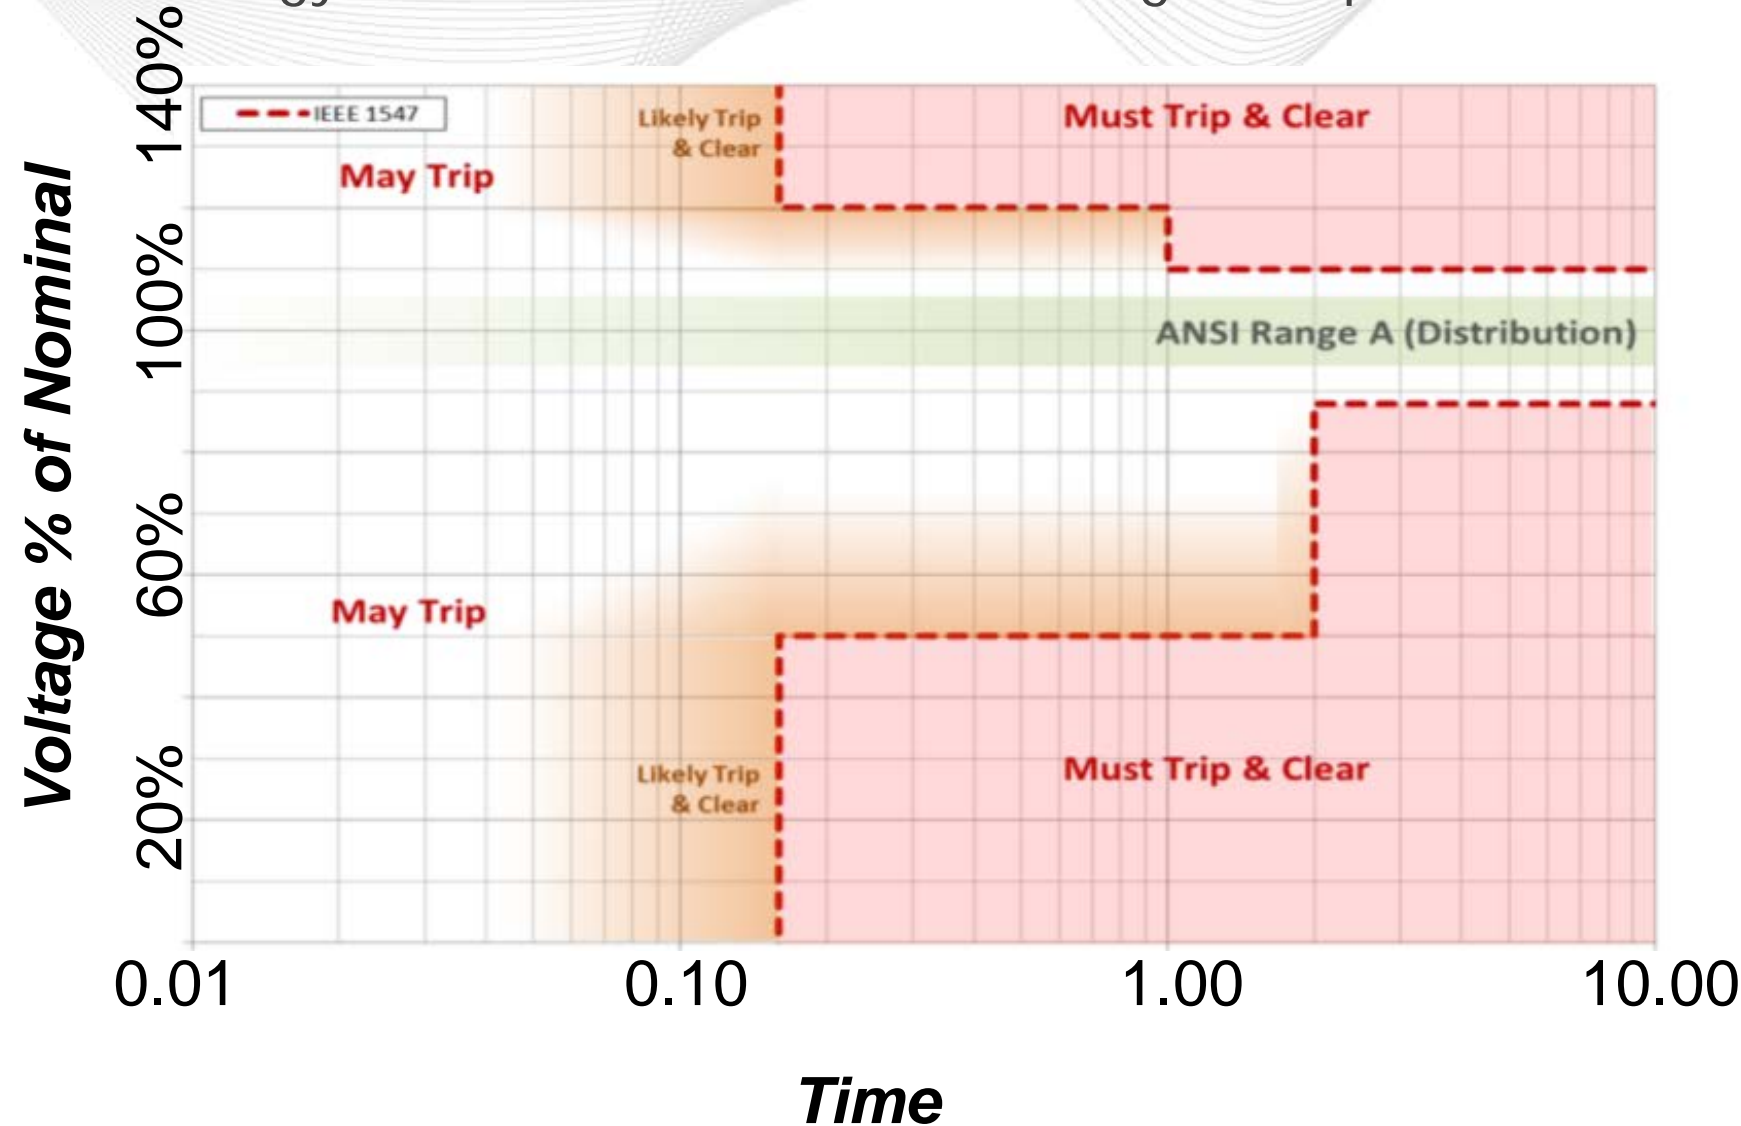

Source: Draft NERC IVGTF Task 1-7 Report

IEEE STANDARDS STORE

In Partnership with Techstreet

SEARCH

IEEE Standards



GO

Standards Store Home

About IEEE-SA

Contact Us

Sign In

My Account

View Basket

IEEE P1547

IEEE Approved Draft Standard for Interconnection and Interoperability of Distributed Energy Resources with Associated Electric Power Systems Interfaces


STANDARD by IEEE, 04/07/2018

[View all product details](#)

 Most Recent

 Track It

Language: English


Available Formats	Options	Availability	Priced From (in USD)	
PDF		P1547/D7.3, Dec 2017 - APPROVED DRAFT	\$145.00 Members pay\$116.00	Add to Cart

https://www.techstreet.com/ieee/standards/ieee-p1547?gateway_code=ieee&vendor_id=5915&product_id=1983168

Revised 1547-2018 Standard Mandates “Ride Through”

Category II

- IEEE Standard 1547-2018 offers 3 flavors of “Ride Through”—Category I, II, and III.
- Within each Category, default trip settings are broadly adjustable.
- Up to Authorities Having Jurisdiction (e.g., utilities, local regulators, PJM) to specify Category and (optional) modified trip settings

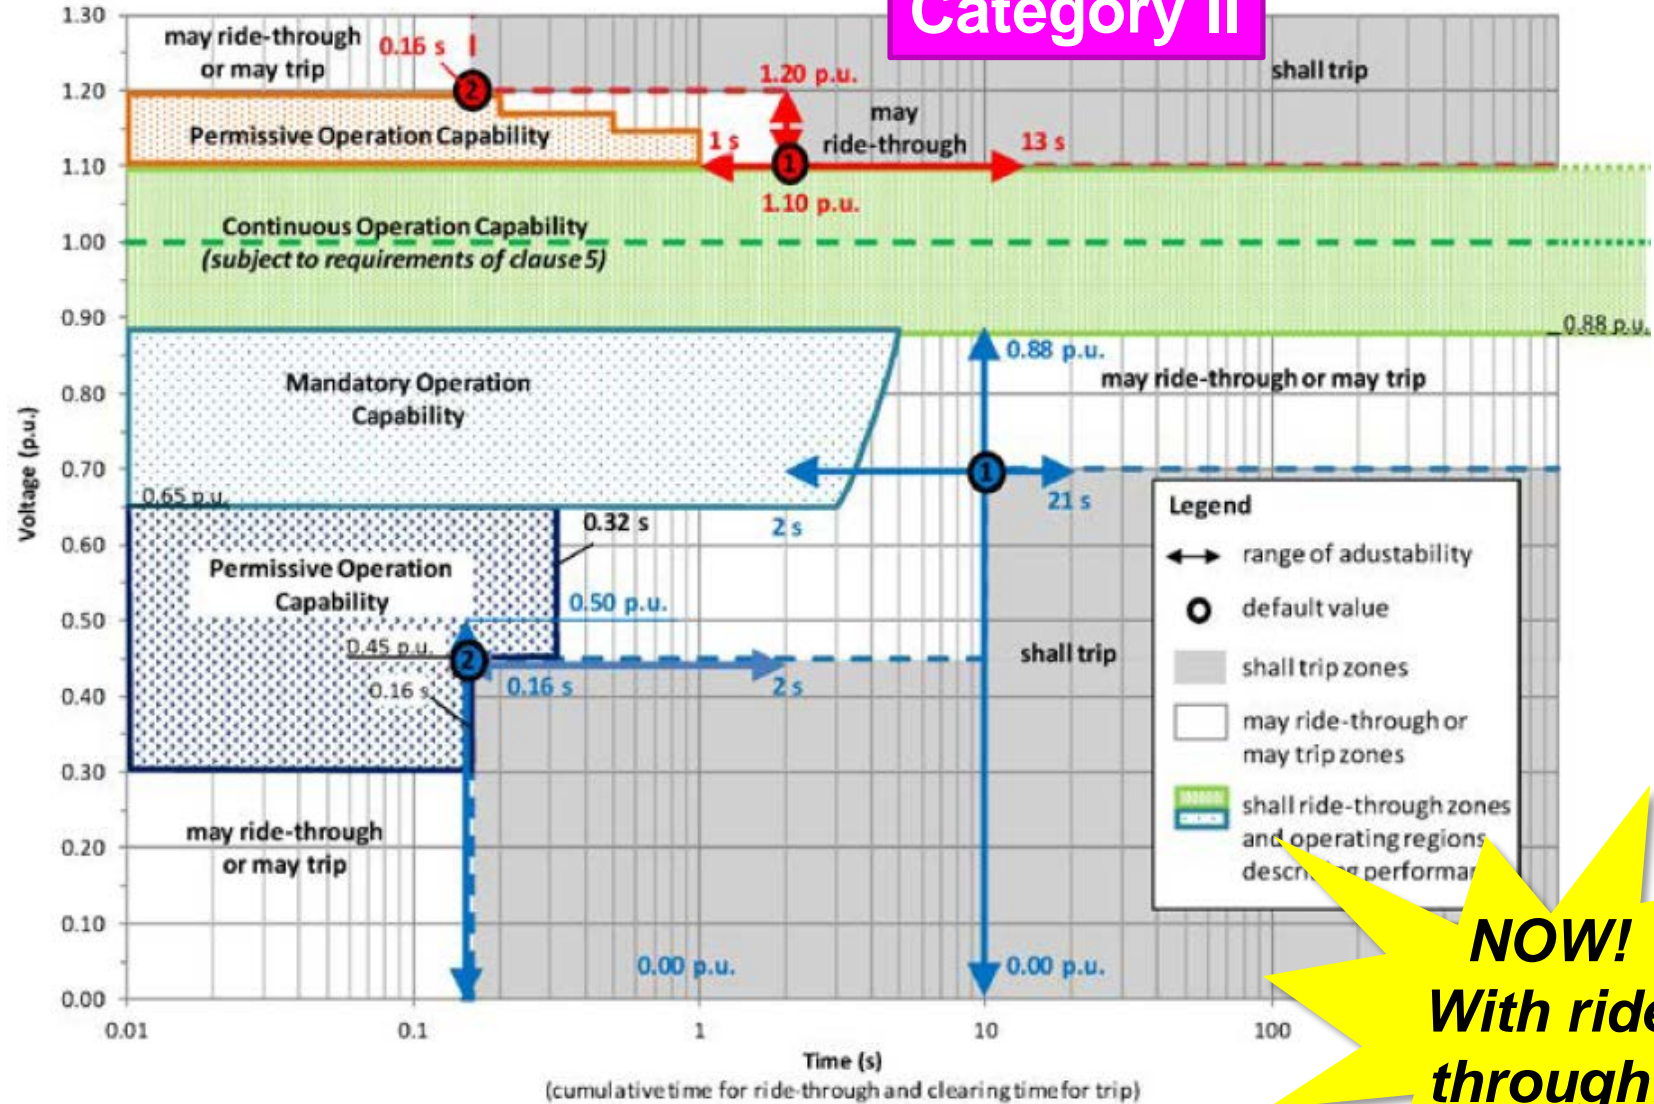

**NOW!
With ride through!**



PJM Role in Implementation of New IEEE 1547-2018 Standard

- Most DER is under local jurisdiction, and PJM has very limited authority.
- In general, the distribution utility is the primary utility stakeholder for establishing DER trip and ride through parameters.
- PJM supports implementation of DER “Ride Through” requirements.
- PJM is available to support and coordinate with distribution utility efforts to establish new requirements based on the revised IEEE 1547-2018.
- PJM recognizes that the revised standard establishes an explicit role for PJM: *“Area EPS operators may specify values within the specified range subject to the limitations on voltage trip settings specified by the regional reliability coordinator”*.
- PJM requires 1547-2003 for a limited set of DER, expects to update rules to revised 1547-2018 standard. PJM will seek utility input as part of that process.

Given broad options in 1547-2018—consensus among distribution utilities on single PJM-wide set of ride through requirements and trip settings would be beneficial.

Feb 28: Preliminary trial workshop w/ 4 utilities (T and D)

March: Report out on trial workshop

Summer: Workshop w/ for all PJM utilities (T and D)

2018: Ongoing collaboration

2019: Final Documentation of Consensus Ride Through and Trip Parameters

PJM Rules

Distribution Utility Discussions under Local Regulation



Inverter-Based Resource Webinar Series



DATE and TIME	SESSION	REGISTRATION LINK
Wednesday, March 21 2pm – 4pm EST	Inverter Fundamentals – Distributed Energy Resources (DER) and Bulk Power System (BPS) Connected Resources	join the meeting 1-855-797-9485 640 232 196
Thursday, April 5 2pm – 4pm EST	Distributed Energy Resource (DER) Impacts	join the meeting 1-855-797-9485 644 957 932
Wednesday, May 2 2pm – 4pm EST	Inverter-Based Resources Connected to the Bulk Power System	join the meeting 1-855-797-9485 641 929 120
Thursday, May 17 2pm – 4pm EST	Inverter modeling for protection, harmonics, EMT studies, and review of real-world VER related events	join the meeting 1-855-797-9485 641 686 608
Wednesday, June 13 2pm – 4pm EST	Recommended Performance for Inverter-Based Resources Connected to the Bulk Power System – NERC Reliability Guideline	join the meeting 1-855-797-9485 644 506 277

http://www.nerc.com/comm/PC/Documents/Inverter_Based_Resources_Webinar_Series_Flyer-draft_02.05.18.pdf